



# METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY

Metropolitan Historic Zoning Commission  
Sunnyside in Sevier Park  
3000 Granny White Pike  
Nashville, Tennessee 37204  
Telephone: (615) 862-7970  
Fax: (615) 862-7974

## STAFF RECOMMENDATION Salemtn Neighborhood Conservation Zoning Overlay Design Guidelines April 17, 2013

**Application:** Salemtn Neighborhood Conservation Zoning Overlay

**Map and Parcel Numbers:** multiple


**Council Districts:** 19

**Applicant:** Council Member Erica Gilmore

**Project Lead:** Robin Zeigler, [robin.zeigler@nashville.gov](mailto:robin.zeigler@nashville.gov), 615-862-7970

<p><b>Description of Project:</b> Councilmember Erica Gilmore is requesting a Neighborhood Conservation Zoning Overlay for the Salemtn neighborhood which includes 4<sup>th</sup> and 5th Avenues North, between I-65N and Garfield Street and portions of Garfield, Buchanon and Coffee Streets.</p>	<p><b>Attachments</b> <b>A:</b> Overlay Boundaries <b>B.</b> Photographs</p>
<p><b>Recommendation Summary:</b> Staff recommends adoption of the Salemtn design guidelines finding that they meet state and local standards.</p>	

# Proposed boundaries of Salemtown Neighborhood Conservation Zoning Overlay

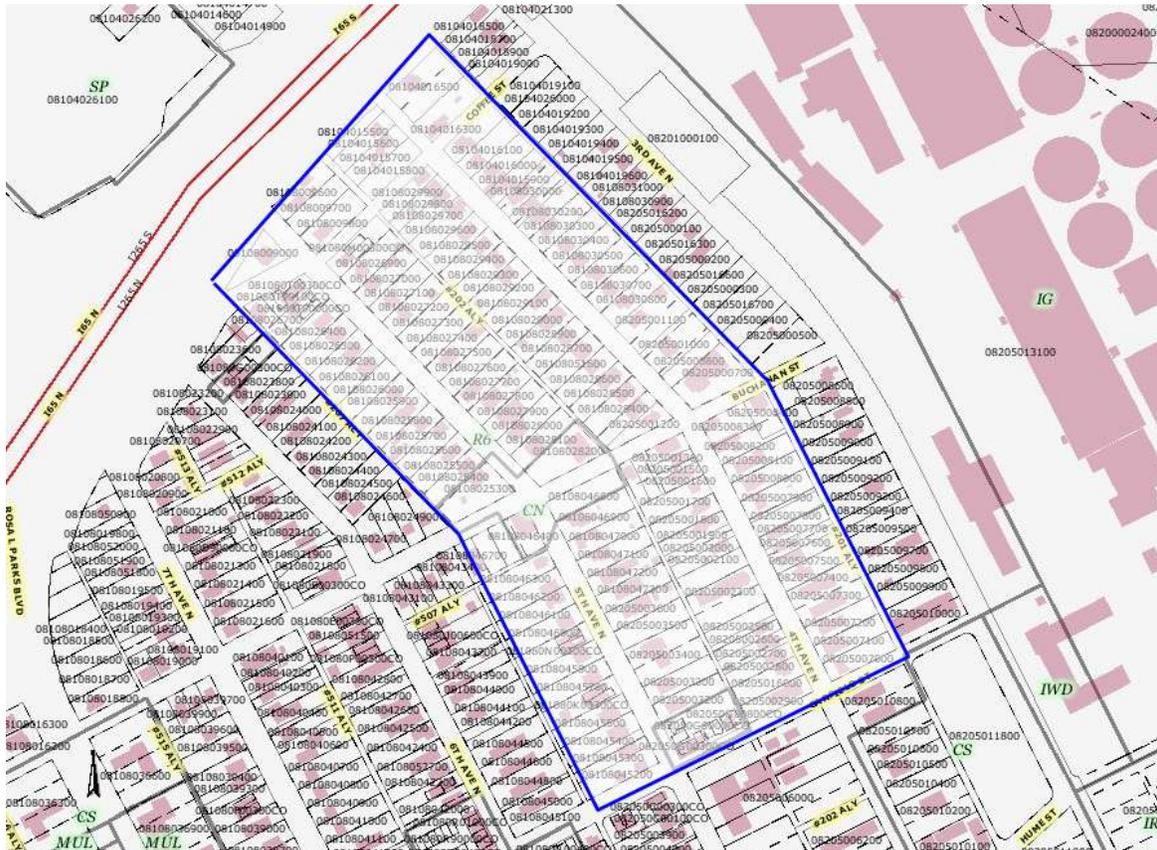

## **Applicable Ordinance:**

### Article IX. Historic Zoning Commission

17.40.410 Powers and Duties. Establishment of Design Review Guidelines. The historic zoning commission shall adopt design guidelines for each historic overlay district and apply those guidelines when considering preservation permit applications. Design guidelines relating to the construction, alteration, addition and repair to, and relocation and demolition of structures and other improvements shall be consistent with the National historic Preservation Act of 1966, as amended. A public hearing following the applicable public notice requirements of Article XV of this chapter shall precede the adoption of all design review guidelines by the historic zoning commission. Testimony and evidence material to the type of historic overlay under consideration may be considered by the commission in its deliberations.

## **Background:**

Due to its proximity to downtown, the neighborhood is experiencing an increased amount of new construction, some of which is not appropriate for the neighborhood. It is the desire of the neighborhood to grow but to also retain their unique historic character.

The neighborhood has been in discussion about the overlay for more than a year and has hosted small meetings with the neighborhood organization's officers and larger informational meetings open to everyone. Councilmember Erica Gilmore hosted the most recent informational meetings on March 25, 2013, 7 p.m. at the Morgan Community Center, and April 9, 6 p.m. at the Salemtown A.M.E. Church. Councilmember Gilmore noticed the April meeting via direct mail. The neighborhood organization noticed the MHZC meeting, the Planning Commission's meeting and the Council's Public Hearing via mailed notice to property owners, a newspaper ad and yard signs.

The MHZC heard this case on February 20, 2013 and recommended adoption of the overlay to Metro Council, but due to ongoing neighborhood discussions the MHZC delayed adoption of the design guidelines until the April 17, 2013 regularly scheduled hearing.

A draft of the design guidelines has been available on the MHZC website for approximately three months. Notice of the April meeting also provided the direct link to the design guidelines and information on how someone could obtain a printed copy. A couple of changes have been made since the first draft design guidelines was posted. The boundaries of the district have changed to what has been reviewed by Metro Council and the language concerning appropriate height for infill construction has changed based on neighborhood comments.

## Analysis and Findings:

The portion proposed for an overlay is a smaller portion of the overall area that is considered the Salemtown neighborhood which extends between I-65 and Hume Street and 3<sup>rd</sup> and 7<sup>th</sup> Avenues. This area was chosen based on the fact that it has the greatest concentration of historic properties.

The guidelines were written following the general format of previous neighborhood conservation design guidelines and based on the National Park Service's Secretary of Interior's Standards (Historic Preservation Act). The guidelines also include the Standards. An architectural resource survey was conducted and the guidelines were customized to address the specific architectural characteristics of the neighborhood.

## Architectural Style and Form



Shotgun house at 1714  
4<sup>th</sup> Avenue North

The architectural styles are simple with several common house forms evident. One prominent form is a “shotgun” house, which is a long, narrow, one-story building derived from a Yoruba housing type via Haiti and later from Louisiana. It was most popular in urban areas after the Civil War. Examples in Salemtown have either a front porch, a long side porch with the entrance towards the back of the porch, or a recessed entrance.



Gabled-ell at 1805 4<sup>th</sup> Avenue  
North

Other common forms found in the district are gabled-ells which have an “L” shaped footprint and simple side-gabled buildings which typically have a shed-roof full porch, a centered gabled partial-width porch, no porch, or a recessed entrance.



Hipped roof house at 1706 5<sup>th</sup>  
Avenue North

Hipped roof bungalows are also seen throughout the district and typically have a full-width porch or a “cutaway” porch within the main body of the building.

All these forms are seen with a variety of styles, mainly Italianate, Queen Anne Colonial Revival, and Craftsman styles. Duplexes in the neighborhood are typically side-by-side with two front entrances and one or two front porches. With one exception, all historic dwellings are one or one and one-half stories tall.

## **Recommendation**

Staff recommends adoption of the Salemtown design guidelines finding that they meet state and local standards.

# SALEMTOWN NEIGHBORHOOD CONSERVATION ZONING

## SALEMTOWN NEIGHBORHOOD CONSERVATION ZONING OVERLAY

### INSIDE



<i>Historic Zoning Overlay</i>	2
<i>What are the Design Guidelines</i>	3
<i>Purpose of the Design Guidelines</i>	4
<i>A Short History</i>	6
<i>Map of Overlay</i>	11
<i>New Construction</i>	12
<i>Accessory Buildings</i>	18
<i>Additions</i>	20
<i>Demolition</i>	23
<i>Relocation</i>	24
<i>Definitions</i>	25

## METROPOLITAN HISTORIC ZONING COMMISSION

Metropolitan Government of  
Nashville and Davidson County

Sunnyside in Sevier Park  
3000 Granny White Pike  
Nashville, Tennessee 37204  
615-862-7970 fax: 615-862-7974  
[www.nashville.gov/mhc](http://www.nashville.gov/mhc)  
[histlap1@nashville.gov](mailto:histlap1@nashville.gov)

Adopted: March 20, 2013



# I. INTRODUCTION

## WHAT IS REVIEWED:

### IN A HISTORIC LANDMARK OVERLAY

- New construction (primary and secondary structures)
- Additions – increased footprint, height or building envelope of an existing structure
- Demolition (in whole or in part)
- Relocation of structures
- Construction of appurtenances (with the exception of portable storage buildings less than 100 square feet)
- Signage
- Repairs and Alterations to existing structures
- Setback reductions

### IN A HISTORIC PRESERVATION OVERLAY

- New construction (primary and secondary structures)
- Additions – increased footprint, height or building envelope of an existing structure
- Demolition (full or in part)
- Relocation of structures
- Construction of appurtenances (with the exception of portable storage buildings less than 100 square feet)
- Signage
- Repairs and Alterations to existing structures
- Setback reductions

## THE NEIGHBORHOOD CONSERVATION ZONING OVERLAY

Please also see *MHZC Hand Book*.

Neighborhoods in more than two thousand towns in the United States use historic zoning as a tool to protect their unique architectural characters. There are quantifiable reasons for historic zoning: it gives neighborhoods greater control over development; it can stabilize property values; it decreases the risk of investing in one’s house; it promotes heritage tourism; it protects viable urban housing stock; it preserves natural resources by conserving building materials. And there are less quantifiable, but equally important, reasons for conservation zoning -- it protects our past for future generations, it nurtures a sense of community, and it provides a sense of place.

Historic zoning overlays are **locally** designated and administered by the Metropolitan Historic Zoning Commission (MHZC), an agency of the Metropolitan Government of Nashville and Davidson County. Historic zoning overlays are applied in addition to the base or land-use zoning of an area. *Historic zoning overlays do not impact use.*

Like the National Register of Historic Places, neighborhood conservation zoning honors an area’s historical significance. With that recognition, certain exterior work on buildings—new construction, additions, demolition, and relocation—is reviewed to ensure that the neighborhood’s special character is preserved.

There are three types of historic zoning overlays: historic preservation, neighborhood conservation and historic landmarks. In addition to the projects reviewed in a neighborhood conservation zoning overlay, historic preservation and historic landmark overlays also review exterior alterations to existing buildings -- like replacing siding or installing a fence. Overlays with historic preservation or historic landmark zoning are not more historically significant than those with neighborhood conservation zoning; rather, the MHZC with neighborhood input and direction of the Council member determined that this overlay is most compatible with the goals of the neighborhood and the MHZC.



## I. INTRODUCTION

### WHAT ARE THE DESIGN GUIDELINES?

The Metropolitan Historic Zoning Commission (MHZC) is the architectural review board that reviews applications for work on properties within historic zoning overlay districts. Its nine members, appointed by the mayor, include representatives from zoning districts, the Metropolitan Planning Commission, the Metropolitan Historical Commission, architect(s) and others. Design review is administered according to a set of design guidelines. The guidelines are criteria and standards, developed jointly by the MHZC and the residents of the neighborhood, which are used in determining the architectural compatibility of proposed projects. The guidelines provide direction for project applicants and ensure that the decisions of the MHZC are not arbitrary or based on anyone's personal taste.

The guidelines protect the neighborhood from new construction or additions not in character with the neighborhood and from the loss of architecturally or historically important buildings.

By state and local legislation, design guidelines for historic overlays must be in accordance with the *Secretary of the Interior's Standards for the Treatment of Historic Properties*—criteria developed by the National Park Service and used by private and public preservation organizations throughout the country. (Please see I.B.)

### IN A NEIGHBORHOOD CONSERVATION OVERLAY (also Bc>B Homestays)

- *New construction (primary and secondary structures)*
- *Additions – increased footprint, height or building envelope of an existing structure*
- *Demolition (in whole or in part)*
- *Relocation of structures*
- *Setback reductions*

### WHAT IS NOT REVIEWED

- *Work that cannot be seen from the public right-of-way (not including alleys). To avoid a possible violation, the project should be evaluated by staff for assurance that a Preservation Permit is not necessary.*
- *Temporary Structures are ones that are erected for a period of 90 days or less and does not have permanent foundations.*
- *Portable buildings are those that are no larger than 10' x 10', do not have permanent foundations, designed and used primarily for the storage of household goods, personal items and other materials, are used on a limited basis and are not hooked up to utilities.*
- *Temporary banners/signage*
- *Temporary construction trailers*
- *Painting of wood*



## I. INTRODUCTION

### PURPOSE OF THE DESIGN GUIDELINES

Within the zoning ordinance, “historic zoning” is used as the general term for Nashville’s three types of zoning overlay districts applicable to historic properties: historic preservation, neighborhood conservation, and historic landmark. The references to historic zoning in the ordinance and design guidelines are to be understood as neighborhood conservation zoning overlay, or simply conservation zoning.

- A. Design guidelines are criteria and standards which the Metropolitan Historic Zoning Commission must consider in determining the appropriateness of proposed work within a neighborhood conservation zoning district. Appropriateness of work must be determined in order to accomplish the goals of historic and neighborhood conservation zoning, as outlined in Article IX (Historic Zoning Regulations), Metropolitan Comprehensive Zoning Ordinance:
1. To preserve and protect the historical and/or architectural value of buildings or other structures;
  2. To regulate exterior design, arrangement, texture, and materials proposed to be used within the historic district to ensure compatibility;
  3. To create an aesthetic appearance which complements the historic buildings or other structures;
  4. To foster civic beauty;
  5. To strengthen the local economy; and
  6. To promote the use of historic districts for the education, pleasure, and welfare of the present and future citizens of Nashville and Davidson County.




# I. INTRODUCTION

B. *By state law, all design guidelines for neighborhood conservation zoning overlays must comply with the Secretary of the Interior's Standards for Treatment of Historic Properties:*

- 1. A property shall be used for its historic purpose or be placed in a new use that requires minimal changes to the defining characteristics of the building and its site and environment.*
- 2. The historic character of a property shall be retained and preserved. The removal of historic materials or alteration of features and spaces that characterize a property shall be avoided.*
- 3. Each property shall be recognized as a physical record of its time, place, and use. Changes that create a false sense of historical development, such as adding conjectural features or architectural elements from other buildings, shall not be undertaken.*
- 4. Most properties change over time; those changes that have acquired historical significance in their own right shall be retained and preserved.*
- 5. Distinctive features, finishes, and construction techniques or examples of craftsmanship that characterize a property shall be preserved.*
- 6. Deteriorated historic features shall be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature shall match the old in design, color, texture, and other visual qualities and, where possible, materials. Replacement of missing features shall be substantiated by documentary, physical, or pictorial evidence.*
- 7. Chemical or physical treatments, such as sandblasting, that cause damage to historic materials shall not be used. The surface cleaning of structures, if appropriate, shall be undertaken using the gentlest means necessary.*
- 8. Significant archeological resources affected by a project shall be protected and preserved. If such resources must be disturbed, mitigation measures shall be undertaken.*
- 9. New additions, exterior alterations, or related new construction shall not destroy historic materials that characterize the property. The new work shall be differentiated from the old and shall be compatible with the massing, size, scale, and architectural features to protect the historic integrity of the property and its environment.*
- 10. New additions and adjacent or related new construction shall be undertaken in such a manner that if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.*

*The full set of Secretary of Interior Standards may be found online at*

*[www.cr.nps.gov/hps/tps/standguide/](http://www.cr.nps.gov/hps/tps/standguide/)*

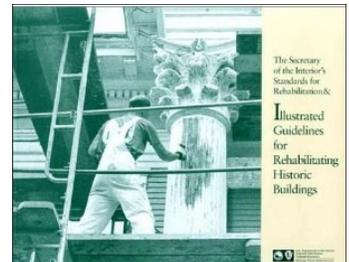



## I. INTRODUCTION

### A SHORT HISTORY OF SALEMTOWN



1817 4th Avenue North

Today, the Salemtown neighborhood is the area between Hume Street and I-65 and 3rd and 7th Avenues. The Neighborhood Conservation Zoning Overlay is a portion of this larger neighborhood with a high concentration of historic buildings.

Much of the land that is now Salemtown was originally hunting grounds that were acquired by David McGavock after he moved from Virginia to Fort Nashborough in 1786. He acquired property in Davidson County on both the north and south sides of the Cumberland River. His sons Dr. David T. and Lysander McGavock inherited the land from their father. Dr. D.T. McGavock who subdivided the first portion, between Hume and Buchanan Streets, and 4<sup>th</sup> Avenue North (Cherry Street) and 5<sup>th</sup> Avenue North (Summer Street) in 1855. The development of this area was a time of growth for Nashville. The city had just added gas street lamps and begun construction on the State Capitol and a suspension bridge across the Cumberland River.



1709 3rd Avenue North

Development for the rest of Salemtown would have to wait until after the Civil War. Just three years after the area was incorporated into Nashville’s city limits in 1865, Dr. McGavock expanded his initial subdivision north along 4<sup>th</sup> Avenue. Soon after, he developed the North Nashville Real Estate Company and in 1870 platted the area between Clay and Monroe Streets and Buena Vista Street and 5<sup>th</sup> Avenue (formerly Summer Street..) *In 1904 Downtown street names changed to numbered streets: 3<sup>rd</sup> Avenue North was College Street, 4<sup>th</sup> Avenue North was Cherry Street and 5<sup>th</sup> Avenue North was Summer Street, 6<sup>th</sup> Avenue North was High Street, 7<sup>th</sup> Avenue North was Vine Street and 8<sup>th</sup> Avenue North was McGavock Avenue.*



1711 3rd Avenue North

By 1897 the area was approximately 35% developed with the greater density close to downtown. The development was mainly residential with single- and two-family homes. An exception was a two-story tenement house (demolished) located at 1713 -1715 4<sup>th</sup> Avenue North (Cherry Street). In addition, a small amount of industry was scattered throughout the residential area. The 1897 Sanborn map shows two steam powered soap companies: the D.F. Brown soap factory at the corner of 3<sup>rd</sup> Avenue (College Street) and Hume Street and Kaphan Soap located mid-block between Buchanan and Garfield Streets. An 1881 ad for Kaphan states that

*The three homes above are some of the oldest homes in the district, constructed prior to 1897.*




### I. INTRODUCTION


there brands are “Extra Olive,” Mottled German,” and “Champion” and that they deliver anywhere in the city. There were also two slaughter houses: A slaughter house and sausage kitchen was located at the corner of Buchanan Street and 4<sup>th</sup> Avenue North (College Street) and Chas Hoff Slaughter House at the corner of 5<sup>th</sup> Avenue North (Summer Street) and Buchanan Street. With the exception of the American Rule Manufacturing complex located at 1807 3<sup>rd</sup> Avenue North (College Street) industry was gone from the neighborhood by 1914.

Salemtown has always been home to the working-class . In 1910, some typical jobs included domestic, general laborer, clerk, grocer and bottle maker. By 1950, the occupations were similar and included laborers for brick, carpentry, shoe and chemical companies and Werthan Bag, as well as grocers, firemen and an interior decorator. At least as early as 1910, the neighborhood was racially mixed with approximately 25% of its residents being African-American. It has always been a neighborhood of transition with very few of the families in residence in 1910 remaining in 1950. Rental property was often included within the main structure or in the rear. In 1950, almost half of the homes were rented rather than owner-occupied. Today, approximately 20% of the residents are owner occupied.

The name of the neighborhood and when the name was adopted is unknown. It was possibly associated with the Salem A.M.E. church; however, current members do not believe that is the case. Other residents believe it came from an influx of individuals from the Salem, North Carolina area. At least two residents have stated that it references the Salem, Massachusetts witch trials as an analogy of slave lynchings that may have taken place on the nearby banks of the Cumberland River. Although the name “Salemtown” does not appear in written histories of the area, residents have been using the name for at least two generations.

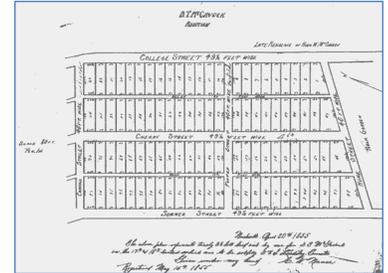

1855 plat of a portion of the district.

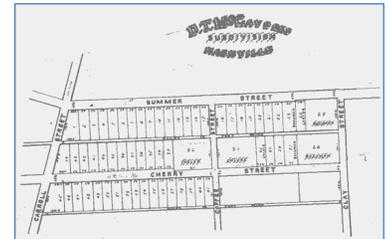

1868 plat of a portion of the district.



## **A SHORT HISTORY, continued**

The architectural styles are simple with several common house forms evident. One prominent form is a “shotgun” house, which is a long, narrow, one-story building derived from a Yoruba housing type via Haiti and later from Louisiana. It was most popular in urban areas after the Civil War. Examples in Salemtown have either a front porch, a long side porch with the entrance towards the back of the porch, or a recessed entrance.

Other common forms found in the district are gabled-ells which have an “L” shaped footprint and simple side-gabled buildings which typically have a shed-roof full porch, a centered gabled partial-width porch, no porch, or a recessed entrance.

Hipped roof bungalows are also seen throughout the district and typically have a full-width porch or a “cutaway” porch within the main body of the building.

All these forms are seen with a variety of styles, mainly Italianate, Queen Anne Colonial Revival, and Craftsman styles. Duplexes in the neighborhood are typically side-by-side with two front entrances and one or two front porches. With one exception, all historic dwellings are one or one and one-half stories tall.



## A SHORT HISTORY, continued



*Shotgun with side porch at 1809 5th Avenue North..*



*Shotgun with front porch at 1714 4th Avenue North.*



*Gabled-ell at 1805 4th Avenue North.*



*Cross gable at 1703 5th Avenue North.*



*Side gable at 1810 5th Avenue North.*



*Side gable with full width porch at 1617 5th Avenue North.*



*Hipped roof with full-width porch at 1706 5th Avenue North.*



*Hipped roof with cutaway porch at 1821 4th Avenue North.*



## A SHORT HISTORY, continued

Purposely left blank



# BOUNDARIES OF OVERLAY





## II. DESIGN GUIDELINE PRINCIPLES

*Italicized sections of the guidelines contain interpretive information that is meant to make the guidelines easier to understand; they are not part of the guidelines themselves. Illustrations are intended only to provide example buildings and circumstances. It is important to remember that every building is different and what may be appropriate for one building or site may not be appropriate for another.*




*Example of a small storage building without a permanent foundation.*

1. These guidelines shall apply only to the exteriors of buildings and to new construction that would have at least a portion visible from a public right-of-way.

*For the purposes of neighborhood conservation zoning, alleys are not considered to be public rights-of-way.*

*New free-standing buildings less than 100 square feet in area and that do not have a foundation and are located at the rear of a property, are not required to comply with the design guidelines.*

2. The public facades—front- and street-related sides—of proposals for new

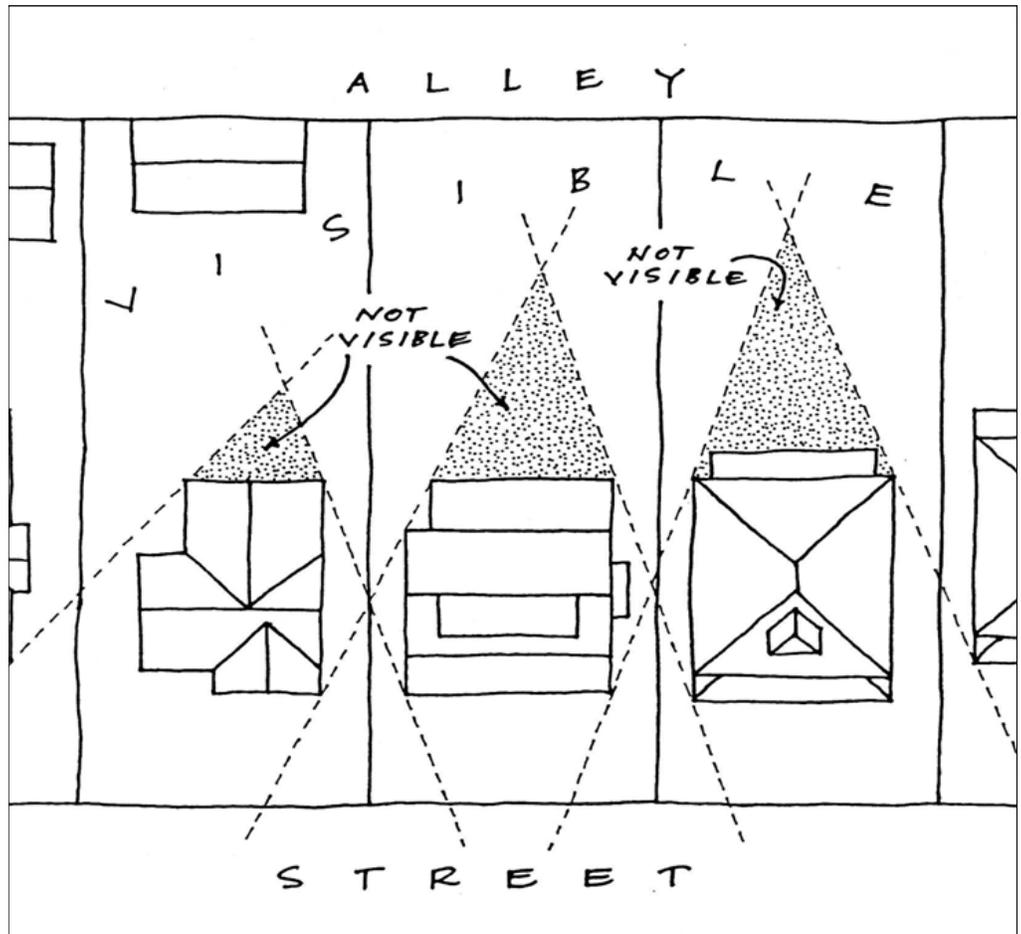




## II. DESIGN GUIDELINE PRINCIPLES

buildings shall be more carefully reviewed than other facades.

*Specifically for corner lots because they are visible from a public street, a secondary elevation is reviewed similarly to a primary elevation.*

- 3. New buildings do not need to imitate past architectural styles but should mimic historic forms found in the district. For an exception to this principle, see number 4. See form examples on page 9.

*This principle precludes the "theme park effect." Fake old buildings are not appropriate. New buildings inspired by historic styles, but identifiable as new construction, can be appropriate.*

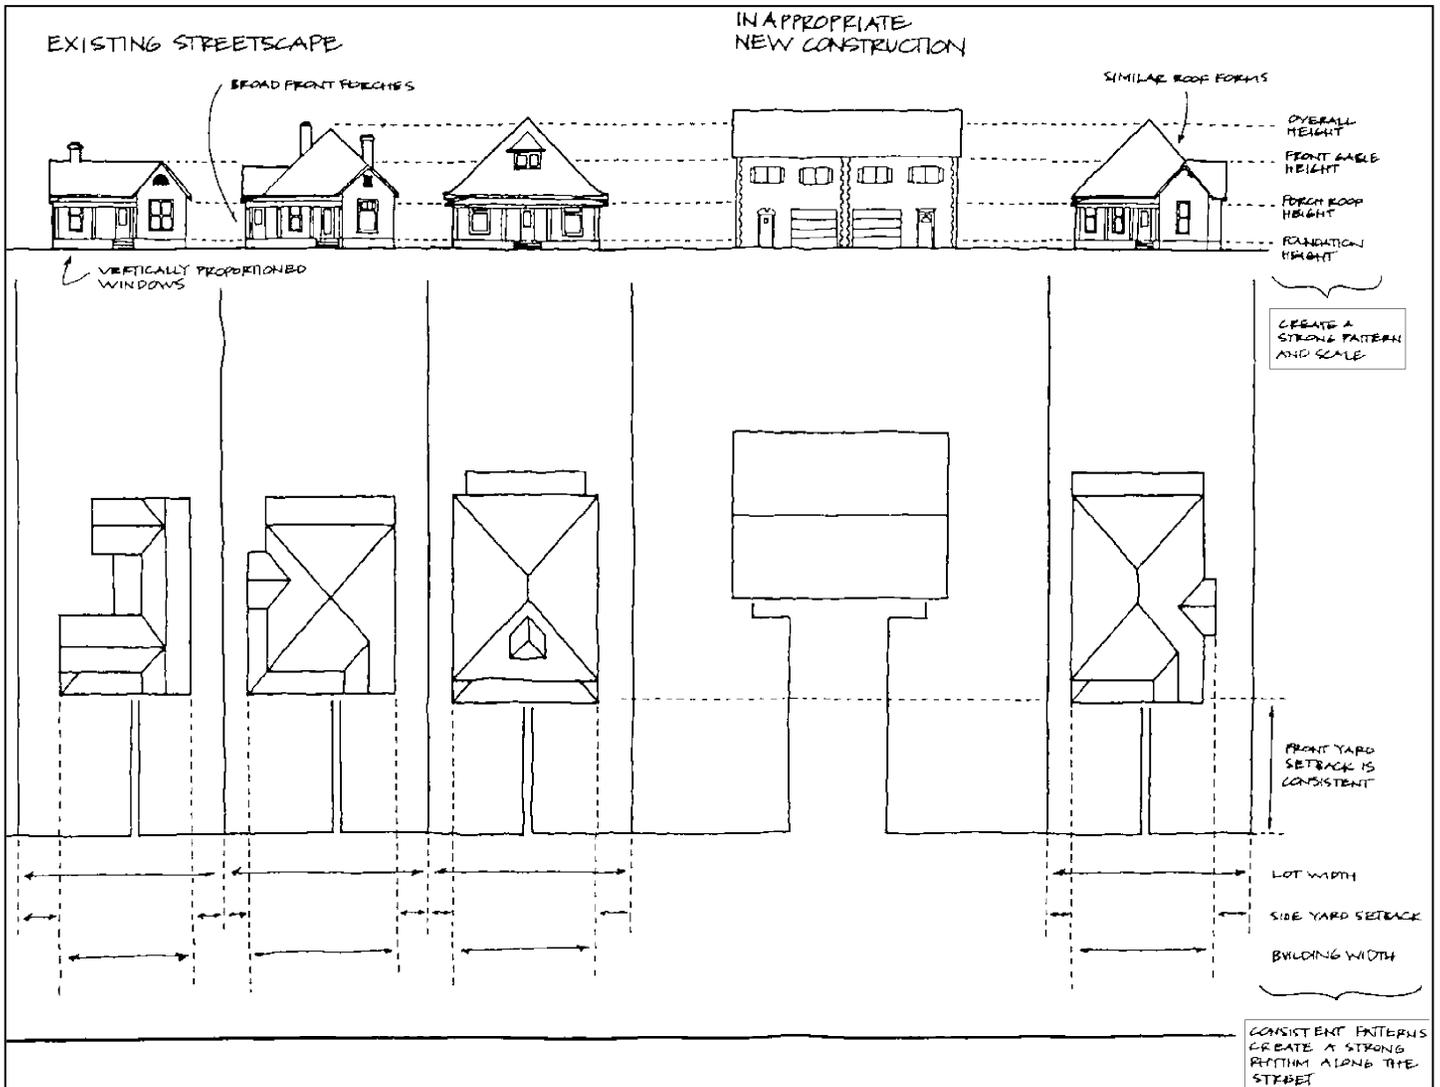



## II. DESIGN GUIDELINE PRINCIPLES

4. Reconstruction may be appropriate when it accurately reproduces a no-longer existing building on its original site, if the building (1) would have contributed to the historic and architectural character of the area; (2) will be compatible in terms of style, height, scale, massing, and materials with the buildings immediately surrounding it; and (3) is accurately based on documentary, physical, or pictorial evidence.
5. Continuous construction in the neighborhood during the early 20th century resulted in a variety of building types and styles that illustrate the evolution of architectural styles and technology over the years. New buildings should continue this tradition while complementing and being visually compatible with surrounding historic buildings.
6. New construction should respect, and not disrupt, the established pattern and rhythm of existing historic buildings on the same and opposite sides of a street.
7. Development of the Salemtown neighborhood began in the late 1850s and continues today. Its period of significance for historic development runs from 1855 to 1945. The period of significance can change as more is learned about a neighborhood and as the neighborhood changes.



### III. NEW CONSTRUCTION

#### A. Height

1. The height of the foundation wall, porch roof(s), and main roof(s) of a new building shall be compatible, by not contrasting greatly, with those of surrounding historic buildings. Where there is little historic context, existing construction may be used for context. Primary buildings should not be more than 35 tall.

#### B. Scale

1. The size of a new building and its mass in relation to open spaces shall be compatible, by not contrasting greatly, with surrounding historic buildings.

#### C. Setback and Rhythm of Spacing


1. The setback from front and side yard property lines established by adjacent historic buildings should be maintained. Generally, a dominant rhythm along a street is established by uniform lot and building width. Infill buildings should maintain that rhythm.
2. The Commission has the ability to reduce building setbacks of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. BL2007-45).

Appropriate setback reductions will be determined based on:

- The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;
- Setbacks of like structures historically found on the site as determined by historic maps, site plans or photographs;
- Shape of lot;
- Alley access or lack thereof;
- Proximity of adjoining structures; and
- Property lines.

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity
- Existing or planned slope and grade

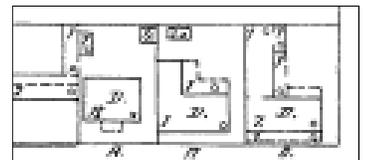

*Setback requirements didn't exist when our historic districts developed so existing conditions sometimes require a little leeway in setbacks required by codes to help new construction fit in with the neighborhood.*



### III. NEW CONSTRUCTION

#### D. Materials, Texture, Details, and Material Color

1. The materials, texture, details, and material color of a new building's public facades shall be visually compatible, by not contrasting greatly, with surrounding historic buildings. The majority of historic buildings are frame with a lap siding with a maximum of a 5" reveal. Only a few historic examples are masonry.
  - a. Inappropriate materials include vinyl and aluminum, T-1-11- type building panels, "permastone", and E.F.I.S. Stud wall lumber and embossed wood grain are prohibited.
  - b. Appropriate materials include: pre-cast stone for foundations, composite materials for trim and decking, cement fiberboard shingle, lap or panel siding . (Few buildings were historically brick and there are no stone examples.)
    - Lap siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal.
    - Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").
    - Four inch (4") nominal corner boards are required at the face of each exposed corner.
    - Stone or brick foundations should be of a compatible color and texture to historic foundations.
    - When different materials are used, it is most appropriate to have the change happen at floor lines.
    - Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.
    - Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate for chimneys.
    - Texture and tooling of mortar on new construction should be similar to historic examples.
3. Asphalt shingle and metal are appropriate roof materials for most buildings. Generally, roofing should NOT have: strong simulated shadows in the granule colors which results in a rough, pitted appearance; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; or uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof or a dominant historic example.

#### E. Roof Shape



### III. NEW CONSTRUCTION

1. The roof(s) of a new building shall be visually compatible, by not contrasting greatly, with the roof shape, orientation, and pitch of surrounding historic buildings. Common roof forms in the neighborhood include side, front and cross gabled, hipped and pyramidal. Typically roof pitches between 6/12 and 12/12. Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range. See page 9 for examples of common roof forms.
2. Small roof dormers are typical throughout the district and are appropriate on one-story buildings only, unless located on the rear. Wall dormers are only appropriate on the rear, as no examples are found historically in the neighborhood.

#### F. Orientation

1. The orientation of a new building's front facade shall be visually consistent with surrounding historic buildings.
2. Primary entrances are an important component of most of the historic buildings in the neighborhood and include partial- or full-width porches attached to the main body of the house or cut-away porches. Recessed entrances are not found in the overlay but in the greater Salemtown neighborhood and may be appropriate in some instances. Simple hoods over the entrance are also appropriate.
3. Porches should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals. Front, side, wrap-around and cutaway porches are appropriate. Porches are not always necessary and entrances may also be defined by simple hoods or recessed entrances.
4. Generally, curb cuts should not be added. Where a new driveway is appropriate it should be two concrete strips with a central grassy median. Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

#### G. Proportion and Rhythm of Openings

1. The relationship of width to height of windows and doors, and the rhythm of solids (walls) to voids (door and window openings) in a new building shall be compatible, by not contrasting greatly, with surrounding historic buildings.
2. Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district. In most cases, every 8-13 horizontal feet of



*Example of recessed entrances at  
1604 6th Avenue.*



*Example of cutaway porch at 1821  
4th Avenue North*



*Example of a partial-width porch.*



*Example of a wrap-around porch at  
1609 5th Avenue South.*




### III. NEW CONSTRUCTION




flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

- 3. Double-hung windows should exhibit a height to width ratio of at least 2:1. Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.
- 4. Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

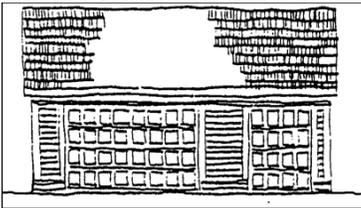

- 5. Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings. Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between. Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

### H. Accessory Buildings

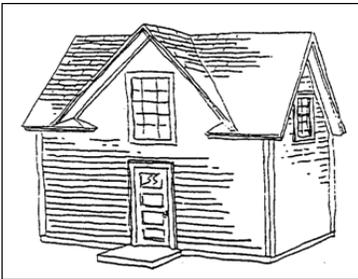

- 1. A new garage or storage building should reflect the character of the period of the house to which the outbuilding will be related. The outbuilding should be compatible, by not contrasting greatly, with surrounding historic outbuildings in terms of height, scale, roof shape, materials, texture, and details.
- 2. Historically, outbuildings were utilitarian in character. High-style accessory structures are not appropriate for Salemtown.

- 3. Roof
  - a. Generally, the eaves and roof ridge of any new accessory structure should not be higher than those of the existing primary building. In Salemtown, historic accessory buildings were between 8' and 14' tall.
  - b. Roof slopes on simple, utilitarian buildings do not have to match the roof slopes of the main structure, but must maintain at least a 4/12 pitch.
  - c. The front face of any street-facing dormer should sit back at least 2' from the wall of the floor below.

- 4. Windows and Doors
  - a. Publicly visible windows should be appropriate to the style of the house.
  - b. Publicly visible pedestrian doors must either be appropriate for the style of house to which the outbuilding relates or be flat with no panels.
  - c. Metal overhead doors are acceptable on garages when they are simple and devoid of overly decorative elements typical on high-style wooden doors.
  - d. For street-facing facades, garages with more than one-bay should have multiple single doors rather than one large door to accommodate more than

**Detached Accessory Dwelling Units** are allowed in overlays that are zoned R80-R6, RM2-RM20-A, RM40-RM100.A, OR20-OR40.A and ORI and ORI-A. Buildings with this use must meet the requirements of Ordinance No. BL2011-900, as well as these design guidelines.



### III. NEW CONSTRUCTION

one bay.


- e. Decorative raised panels on publicly visible garage doors are generally not appropriate.

#### 5. Siding and Trim

- a. Weatherboard, and board-and-batten are typical siding materials. There are no known examples of historic masonry accessory buildings; however, a concrete block building with a parge or stucco coating is appropriate.
- b. Outbuildings with weatherboard siding typically have wide cornerboards and window and door casings (trim).
- c. Four inch (4" nominal) corner-boards are required at the face of each exposed corner for non-masonry structures.
- d. Stud wall lumber and embossed wood grain are prohibited.
- e. Four inch (4" nominal) casings are required around doors, windows, and vents within clapboard walls. Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between. Brick molding is required around doors, windows, and vents within masonry walls but is not appropriate on non-masonry clad buildings.

#### 6. Accessory buildings should be situated on a lot as is historically typical for surrounding historic accessory buildings.

- a. Generally new garages should be placed close to the alley, at the rear of the lot, or in the original location of an historic accessory structure.
- b. Lots without rear alleys may have garages located closer to the primary structure. The appropriate location is one that matches the neighborhood or can be documented by historic maps.
- c. Generally, attached garages are not appropriate.

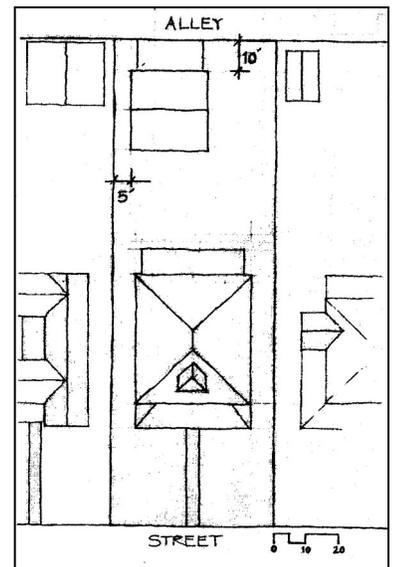


#### I. Utilities

- 1. Utility connections such as gas meters, electric meters, phone, cable, and HVAC condenser units should be located so as to minimize their visibility from the street.
- 2. Generally, utility connections should be placed no closer to the street than the mid point of the structure. Power lines should be placed underground if they are carried from the street and not from the rear or an alley.

#### J. Public Spaces

- 1. Landscaping, sidewalks, signage, lighting, street furniture and other work undertaken in public spaces by any individual, group or agency shall be


## IV. NEW CONSTRUCTION: ADDITIONS

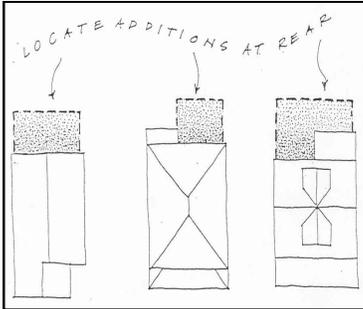


presented to the MHZC for review of compatibility with the character of the district.

### A. Location

1. Generally, an addition should be situated at the rear of a building in such a way that it will not disturb either front or side facades. Additions should be physically distinguished from the historic building and generally fit within the shadow line of the existing building.
  - a. Connections to additions should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.
  - b. Generally rear additions should inset one foot, for each story, from the side wall.
2. When a lot width exceeds 60 feet or the standard lot width on the block, it may be appropriate to add a side addition to a historic structure.
  - a. The addition should set back from the face of the historic structure (at or beyond the midpoint of the building) and should be subservient in height, width and massing to the historic structure.
  - b. Side additions should be narrower than half of the historic building width and exhibit a height of at least 2' shorter than the historic building.
  - c. To deemphasize a side addition, the roofing form should generally be a hip or side-gable roof form.

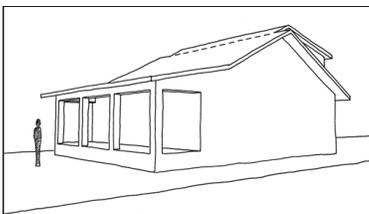

**Appropriate Ridge Raise:** rear dormers are set in from the side wall of the existing house at least 2', creating a division between new and old.

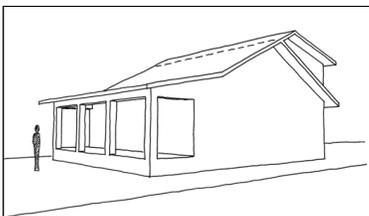

**Inappropriate Ridge Raise:** rear dormers have no inset; they visually and physically alter the roof structure of the existing house.

### B. Massing

1. In order to assure that an addition has achieved proper scale, the addition should generally be shorter and thinner than the existing building. Exceptions may be made when unusual constraints make these parameters unreasonable, such as an extreme grade change or an atypical lot parcel shape or size. In these cases, an addition may rise above or extend wider than the existing building; however, generally the addition should not be higher and extend wider.
  - a. When an addition needs to be taller:
 

Whenever possible, additions should not be taller than the historic building; however, when a taller addition is the only option, additions to single story structures may rise as high as 4' above ridge of the existing building at a distance of 40' from the front edge of the existing building. In this instance, the side walls and roof of the addition must set in as is typical for all additions. The portion of the roof that can be seen should have a hipped, side gable or clipped gable roof to help decrease the visual mass of the addition.
  - b. When an addition needs to be wider:
 

Rear additions that are wider than an existing historic building may be appropriate when the building is narrower than 30' or shifted to one side of the lot. In these instances, a structural alcove or channel must separate the



## IV. ADDITIONS


existing building from the new addition. The structural alcove should sit in a minimum of 1' and be at least twice as long as it is deep.

A rear addition that is wider should not wrap the rear corner. It should only extend from the addition itself and not the historic building.

2. Ridge raises are most appropriate for one-story, side-gable buildings, (without clipped gables) and that require more finished height in the attic. The purpose of a ridge raise is to allow for conditioned space in the attic and to discourage large rear or side additions. The raised portion must sit in a minimum of 2' from each side wall and can be raised no more than 2' of total vertical height within the same plane as the front roof slope.
3. Foundation walls should set in from the existing foundation at the back edge of the existing structure by one foot for each story or half story. Exception: When an addition is a small one-room deep (12' deep or less) addition that spans the width of the structure, and the existing structure is masonry with the addition to be wood (or appropriate substitute siding). The change in material from masonry to wood allows for a minimum of a four inch (4") inset. Foundation height should match or be lower than the existing structure.
4. The height of the addition's roof and eaves must be less than or equal to the existing structure.
5. Visually evident roof slopes should match the roof slopes of the existing structure, and roof planes should set in accordingly for rear additions.

### C. Roof Additions: Dormers, Skylights & Solar Panels


1. Dormer additions are appropriate for some historic buildings as they are a traditional way of adding ventilation and light to upper stories. The addition of a dormer that would require the removal of historic features such as an existing dormer, chimneys, cupolas or decorative feature is not appropriate.
  - a. Rear dormers should be inset from the side walls of the building by a minimum of 2'. The top of a rear dormer may attach just below the ridge of the main roof or lower.
  - b. Front and side dormers should be compatible with the scale and design of the building. Generally, this can be accomplished with the following:
    - New dormers should be similar in design and scale to an existing dormer on the building.
    - If there are no existing dormers, new dormers should be similar in design and scale to an existing dormer on another historic building that is similar in style and massing.
    - The number of dormers and their location and size should be appropriate to the style and design of the building. Sometimes the width of roof dormers relate to the openings below. The symmetry or lack of symmetry within a building design should be used as a guide when placing dormers.

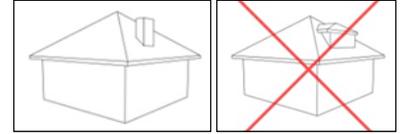


*The dormer shown added on the right image is inappropriate because it required the removal of the chimney.*



*Dormers should not be added to secondary roof planes.*

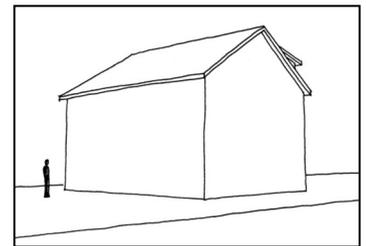

*Appropriate rear dormers are set in from the side wall of the existing house at least two feet, creating a division between new and old.*

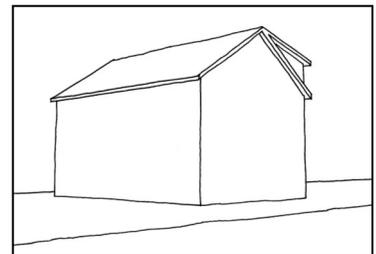

*Inappropriate rear dormers have no inset; they visually and physically alter the roof structure of the existing house.*



## IV. NEW CONSTRUCTION: ADDITIONS

- Dormers should not be added to secondary roof planes.
  - Eave depth on a dormer should not exceed the eave depth on the main roof.
  - The roof form of the dormer should match the roof form of the building or be appropriate for the style.
  - The roof pitch of the dormer should generally match the roof pitch of the building.
  - The ridge of a side dormer should be at least 2' below the ridge of the existing building; the cheeks should be inset at least 2' from the wall below or adjacent valley; and the front wall of the gable should setback a minimum of 2' from the wall below. (These minimum insets will likely be greater than 2' when following the guidelines for appropriate scale.)
  - Dormers should generally be fully glazed and aprons below the window should be minimal.
  - The exterior material cladding of side dormers should match the primary or secondary material of the main building.
2. Skylights should not be located on the front-facing slope of the roof. Skylights should be flat (no bubble lenses) with a low profile (no more than six inches tall) and only be installed behind the midpoint of the building).
  3. Solar panels should be located at the rear of the building, unless this location does not provide enough sunlight. Solar panels should generally not be located towards the front of a historic building unless this is the only workable location.
- D. The creation of an addition through enclosure of a front porch is not appropriate. The creation of an addition through the enclosure of a side porch may be appropriate if the addition is constructed in such a way that original form and openings on the porch remain visible and undisturbed.
- E. Contemporary designs for additions to existing properties are not discouraged when such additions do not destroy significant historical, architectural, or cultural material; and when such design is compatible, by not contrasting greatly, with the size, scale, color, material, and character of the property, neighborhood, or environment.
- F. A new addition should be constructed in such a manner that if the addition were to be removed in the future, the essential form and integrity of the original structure would be unimpaired. Connections should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.
- G. Additions should follow the guidelines for new construction.



## V. DEMOLITION

### A. PRINCIPLE

The demolition of a building, or major portion of a building, which contributes historically or architecturally to the character and significance of the district is not appropriate and should be avoided.

### B. GUIDELINES

#### 1. Demolition is not appropriate

- a. if a building, or major portion of a building, is of such architectural or historical interest and value that its removal would be detrimental to the public interest; or
- b. if a building, or major portion of a building, is of such old or unusual or uncommon design and materials that it could not be reproduced or be reproduced without great difficulty and expense.

#### 2. Demolition is appropriate

- a. if a building, or major portion of a building, has irretrievably lost its architectural and historical integrity and significance and its removal will result in a more historically appropriate visual effect on the district;
- b. if a building, or major portion of a building, does not contribute to the historical and architectural character and significance of the district and its removal will result in a more historically appropriate visual effect on the district; or
- c. if the denial of the demolition will result in an economic hardship on the applicant as determined by the MHZC in accordance with section 17.40.420 (Historic Zoning Regulations), Metropolitan Comprehensive Zoning Ordinance.



## VI. RELOCATION



### A. PRINCIPLES

1. Moving a historic building from its original site should be avoided.
2. Moving a non-historic building, or a building which has irretrievably lost its architectural and historical integrity, may be appropriate.

### B. GUIDELINES

1. Moving a building into the district is appropriate if the building will be compatible with the historic buildings surrounding the new location in terms of height, scale, setback and rhythm of spacing, materials, texture, details, material color, roof shape, orientation, and proportion and rhythm of openings.
2. Moving a building out of the district is not appropriate unless:
  - a. the building does not contribute to the district's historical and architectural significance, or has irretrievably lost its architectural and historical integrity; or
  - b. the building is historic, but the loss of its architectural and historical integrity in its original location is certain.
3. Moving a building from one location to another within the district is not appropriate unless:
  - a. the building will be compatible with the historic buildings surrounding the new location in terms of height, scale, setback and rhythm of spacing, materials, texture, details, material color, roof shape, orientation, and proportion and rhythm of openings; and
  - b. if historic, the loss of its architectural and historical integrity in its original location is certain.



## VII. DEFINITIONS

**Addition:** 1. New construction that increases the habitable space of an existing structure, and is capable of being heated or cooled. 2. An alteration that changes the exterior height of any portion of an existing building, such as skylights, covered porches, covered decks, carports and porte cocheres.

**Appropriate:** Suitable for, or compatible with, a property or district, based on accepted standards and techniques for historic preservation.

**Certificate of Appropriateness:** See Preservation Permit.

**Contributory Status:** Buildings constructed during the period of significance for the district and that have physical integrity are considered as “contributing” to the historic character of the district. They may or may not be significant in their own right. Buildings that do not contribute to the historic character of the district are called non-contributing. Contributory status can change over time as new information becomes available and as districts age. The first factor to consider is the building’s age. Was the building constructed during the period of significance of the district? Is that period of significance still valid? The second consideration is an analysis of the changes that have taken place over time. Does the building retain the majority of its character defining features and form? If the building retains its original form, despite numerous changes, it is likely still considered contributing.

**Demolition:** The tearing down of a building, or a portion thereof.

**Economic Hardship:** A condition that warrants the demolition of a contributing structure where the cost of a structure plus the cost of repairs to the structure to make it habitable are greater than the market value of the structure. Economic hardship may be caused by, but not limited to structural, termite, and fire damage. This exception shall not apply to any property owner who creates a hardship condition or situation as a consequence of their own neglect or negligence. Refer to Section 17.40.420 D of the Metro Code of Nashville and Davidson County.

**Elevation:** A scaled drawing that illustrates the view of a face of a building.


**Embossed Grain:** The embossed pattern pressed into a manufactured material, simulating wood grain or texture.

**Facade:** An exterior face of a building.


**Historic:** A structure or site, usually constructed more than fifty years ago, which possesses historical or architectural significance, based on the criteria for listing in the National Register of Historic Places.

**Muntin:** A secondary framing member to hold panes within a window or glazed door.

**Mullion:** A vertical member separating (and often supporting) window, doors or panels set in series.

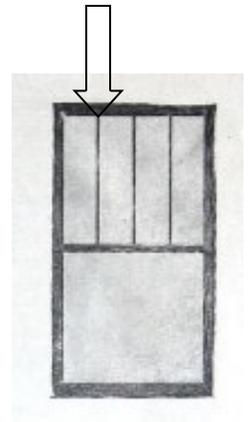

Muntins are also known as “grills” or “dividers.”

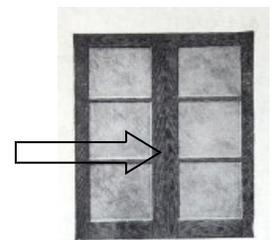

Center bar between the two windows is a mullion.



## VII. DEFINITIONS

**New Construction:** *Any building, addition, structure or appurtenance constructed on a lot after the designation of the historic preservation, neighborhood conservation, or historic landmark zoning overlays.*

**Non-Historic:** *A structure or site, usually constructed within the last fifty years, which does not possess historical or architectural significance, based on the criteria for listing in the National Register of Historic Places.*

**Orientation:** *The directional expression of the front facade of a building, i.e., facing the street, facing north.*

**Period of Significance:** *The time frame in which a neighborhood developed or was platted into building lots and substantially built out with structures, based on the criteria for listing in the National Register of Historic Places.*

**Port Cochere:** *A carriage porch or portico-like structure generally located at a secondary entrance to a building.*

**Preservation Permit:** *A legal document issued by the Metropolitan Historic Zoning Commission confirming review and approval of work to be done on property within the boundaries of an historic or neighborhood conservation zoning overlay districts. A preservation permit is required before obtaining a building permit. Previously called Certificate of Appropriateness.*

**Public Right-of-Way:** *Publicly owned and maintained streets and walkways. For the purposes of historic, neighborhood conservation and landmark zoning overlays, alleys are not considered public rights-of-way.*

**Public Space:** *Any area owned, leased, or for which there is held an easement by a governmental entity, or an area that is required to be open to the public.*

**Reconstruction:** *Construction of an accurate replica of a historic building or portion thereof, based on physical, pictorial or documentary evidence.*

**Relocation:** *The moving of a building from one site to another.*

**Shall:** *What must happen.*

**Should:** *What must happen unless circumstances illustrate why an alternative is more appropriate.*

**METROPOLITAN HISTORIC ZONING COMMISSION**

Sunnyside in Sevier Park  
3000 Granny White Pike  
Nashville, TN 37204

Phone: 615-862-7970  
Fax: 615-862-7974

*The Metropolitan Historic Zoning Commission reviews applications to create new historic overlay districts and reviews and approves preservation permits in historic and conservation districts for new construction, alterations, additions, repair and demolition. For design guidelines, permit applications, and meeting information, visit us at [www.nashville.gov/mhc](http://www.nashville.gov/mhc).*

---

**WE ARE ON THE  
WEB AT  
[WWW.NASHVILLE.  
GOV/MHC](http://WWW.NASHVILLE.GOV/MHC)**

---



The Metro Historical Commission does not discriminate on the basis of race, color, national origin, gender, gender identity, sexual orientation, age, religion, creed or disability in access to, or operation of its programs, services, activities or in its hiring or employment practices. **ADA inquiries should be forwarded to:** Yvonne Ogren, Metro Historical Commission ADA Compliance Coordinator, 3000 Granny White Pike, Nashville, TN 37204, (615) 862-7970. **Title VI inquiries should be forwarded to:** Ms. Shirley Sims-Saldana, Title VI Coordinator, Human Relations, 800 Second Avenue, South, 4<sup>th</sup> floor, Nashville, TN 37210, (615) 880-3391. **Contact Department of Human Resources for all employment related inquiries** at (615) 862-6640.