


TYPICAL CROSS - SECTION

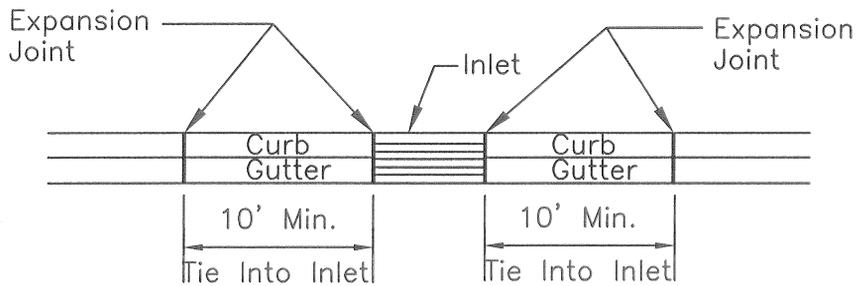

FRONT VIEW

GENERAL NOTES

1. Expansion joints to be spaced a maximum of 100 feet apart or as directed by the Engineer.
2. Expansion joints will also be required at tangent points, ramps, and inlets.
3. Contraction joints are to be cut into curb and gutter every 10 feet to a depth of $D/4$, where D equals the thickness of the section. The spacing of 10 feet may be reduced at closures but no section of curb and gutter shall be less than 10 feet.
4. There will be a minimum of 10 feet tie in at curb inlets on each side of the inlet. An expansion joint will be used on each side of the tie in.
5. Cost of contraction joints to be included in the unit bid price for concrete curb with gutter.

NOT TO SCALE

METROPOLITAN GOVERNMENT OF
NASHVILLE AND DAVIDSON COUNTY
DEPARTMENT OF PUBLIC WORKS

STANDARD CURB
WITH GUTTER

DWG. NO. ST-200

DIR. OF ENG.:

Mark May

DATE: 5/12/03

REVISED: 07/21/00
REVISED: 05/02/03
REVISED: