

DAVID BRILEY
MAYOR



METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY

Metropolitan Historic Zoning Commission
Sunnyside in Sevier Park
3000 Granny White Pike
Nashville, Tennessee 37204
Telephone: (615) 862-7970
Fax: (615) 862-7974

STAFF RECOMMENDATION 3629 Richland Avenue Lot 7, Richland Hall Development June 20, 2018

Application: New construction—infill and outbuilding; setback determination
District: Richland-West End Neighborhood Conservation Zoning Overlay
Council District: 24
Map and Parcel Number: 10409029600
Applicant: Chad Gore, Mike Ford Builders
Project Lead: Jenny Warren, jenny.warren@nashville.gov

Description of Project: Application is to construct a new single family infill and an outbuilding. The project requires a change to the left side setback. Base zoning requires a five foot (5') side setback and the applicant is proposing a three foot (3') side setback.

Recommendation Summary: Staff recommends approval of the project with the following conditions:

1. The finished floor height be consistent with the finished floor heights of neighboring historic houses, to be verified by MHZC staff in the field;
2. Staff approve the following materials prior to purchase and installation: stone and brick samples, all windows and doors, the roof shingle color, the materials of the porch floor and steps, the materials of the rear walkway columns and the material of the driveway and walkway.
3. Staff approve the materials for the outbuilding.
4. Staff approve the front setback in the field to ensure its appropriateness.

With these conditions, staff finds that the project meets Section II.B. of the *Richland-West End Neighborhood Conservation Zoning Overlay: Handbook and Design*

Attachments
A: Photographs
B: Development Site Plan
C: Site Plan
D: Elevations

Vicinity Map:



Aerial Map:



Applicable Design Guidelines:

II.B.1 New Construction

a. Height

The height of the foundation wall, porch roof(s), and main roof(s) of a new building shall be compatible, by not contrasting greatly, with those of surrounding historic buildings.

b. Scale

The size of a new building and its mass in relation to open spaces shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.

c. Setback and Rhythm of Spacing

The setback from front and side yard property lines established by adjacent historic buildings should be maintained. Generally, a dominant rhythm along a street is established by uniform lot and building width. Infill buildings should maintain that rhythm.

The Commission has the ability to determine appropriate building setbacks and extend height limitations of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. 17.40.410).

Appropriate setbacks will be determined based on:

- The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;*
- Setbacks of like structures historically found on the site as determined by historic maps, site plans or photographs;*
- Shape of lot;*
- Alley access or lack thereof;*
- Proximity of adjoining structures; and*
- Property lines.*

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity*
- Existing or planned slope and grade*

In most cases, an infill duplex should be one building, as seen historically in order to maintain the rhythm of the street. Detached infill duplexes may be appropriate in the following instances:

- There is not enough square footage to legally subdivide the lot but there is enough frontage and width to the lot to accommodate two single-family dwellings in a manner that meets the design guidelines;*
- The second unit follows the requirements of a Detached Accessory Dwelling Unit; or*
- An existing non-historic building sits so far back on the lot that a building may be constructed in front of it in a manner that meets the rhythm of the street and the established setbacks.*

d. Materials, Texture, Details, and Material Color

The materials, texture, details, and material color of a new building's public facades shall be visually compatible, by not contrasting greatly, with surrounding historic buildings. Vinyl and aluminum siding

are not appropriate.

T-1-11- type building panels, "permastone", E.F.I.S. and other artificial siding materials are generally not appropriate. However, pre-cast stone and cement fiberboard siding are approvable cladding materials for new construction; but pre-cast stone should be of a compatible color and texture to existing historic stone clad structures in the district; and cement fiberboard siding, when used for lapped siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal.

Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").

Four inch (4") nominal corner boards are required at the face of each exposed corner.

Stud wall lumber and embossed wood grain are prohibited.

Belt courses or a change in materials from one story to another are often encouraged for large two-story buildings to break up the massing.

When different materials are used, it is most appropriate to have the change happen at floor lines.

Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate.

Texture and tooling of mortar on new construction should be similar to historic examples.

Asphalt shingle is an appropriate roof material for most buildings. Generally, roofing should not have strong simulated shadows in the granule colors which results in a rough, pitted appearance; faux shadow lines; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof.

Generally front doors should be 1/2 to full-light. Faux leaded glass is inappropriate.

e. Roof Shape

The roof(s) of a new building shall be visually compatible, by not contrasting greatly, with the roof shape, orientation, and pitch of surrounding historic buildings.

Roof pitches should be similar to the pitches found in the district. Historic roofs are generally between 6/12 and 12/12.

Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range.

Generally, two-story residential buildings have hipped roofs.

Generally, dormers should be located on the roof. Wall dormers are not typical in the historic context and accentuate height so they should be used minimally and generally only on secondary facades. When they are appropriate they should be no wider than the typical window openings and should not project beyond the main wall.

f. Orientation

The orientation of a new building's front facade shall be visually consistent with surrounding historic buildings.

Porches

New buildings should incorporate at least one front street-related porch that is accessible from the front street.

Side porches or porte cocheres may also be appropriate as a secondary entrance, but the primary entrance should address the front.

Front porches generally should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals.

Parking areas and Driveways

Generally, curb cuts should not be added.

Where a new driveway is appropriate it should be two concrete strips with a central grassy median.

Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

g. Proportion and Rhythm of Openings

The relationship of width to height of windows and doors, and the rhythm of solids (walls) to voids (door and window openings) in a new building shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district. In most cases, every 8-13 horizontal feet of flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

Double-hung windows should exhibit a height to width ratio of at least 2:1.

Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.

Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings.

Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.

Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

h. Outbuildings

(Although the MHZC does not review use itself there are additional ordinance requirements for buildings that are or have a Detached Accessory Dwelling Unit (DADU) required by ordinance 17.16.030 that are reviewed by the MHZC. This information is provided for informational purposes only and does not replace ordinance 17.16.030.)

1) A new garage or storage building should reflect the character of the period of the house to which the outbuilding will be related. The outbuilding should be compatible, by not contrasting greatly, with surrounding historic outbuildings in terms of height, scale, roof shape, materials, texture, and details.

Outbuildings: Height & Scale

· On lots less than 10,000 square feet, the footprint of a DADU or outbuilding shall not exceed seven hundred fifty square feet or fifty percent of the first floor area of the principal structure, whichever is less.

· On lots 10,000 square feet or greater, the footprint of a DADU or outbuilding shall not exceed one thousand square feet.

· The DADU or outbuilding shall maintain a proportional mass, size, and height to ensure it is not taller or wider than the principal structure on the lot. The DADU or outbuilding height shall not exceed the height of the principal structure, with a maximum eave height of 10' for one-story DADU's or outbuildings and 17' for two-story DADUs or outbuildings. The roof ridge height of the DADU or outbuilding must be less than the principal building and shall not exceed 25' feet in height.

Outbuildings: Character, Materials and Details

· Historically, outbuildings were either very utilitarian in character, or (particularly with more extravagant houses) they repeated the roof forms and architectural details of the houses to which they related.

Generally, either approach is appropriate for new outbuildings. DADUs or out buildings located on corner lots should have similar architectural characteristics, including roof form and pitch, to the existing principal structure.

· DADUs or outbuildings with a second story shall enclose the stairs interior to the structure and properly fire rate them per the applicable life safety standards found in the code editions adopted by the Metropolitan Government of Nashville.

Outbuildings: Roof

- *Roof slopes on simple, utilitarian buildings do not have to match the roof slopes of the main structure, but generally should maintain at least a 4/12 pitch.*
- *The DADU or outbuilding may have dormers that relate to the style and proportion of windows on the DADU and shall be subordinate to the roof slope by covering no more than fifty percent of the roof plane and should sit back from the exterior wall by 2'.*

Outbuildings: Windows and Doors

- *Publicly visible windows should be appropriate to the style of the house.*
- *Double-hung windows are generally twice as tall as they are wide and of the single-light sash variety.*
- *Publicly visible pedestrian doors must either be appropriate for the style of house to which the outbuilding relates or be flat with no panels.*
- *Metal overhead doors are acceptable on garages when they are simple and devoid of overly decorative elements typical on high-style wooden doors. Decorative raised panels on publicly visible garage doors are generally not appropriate.*
- *For street-facing facades, garages with more than one-bay should have multiple single doors rather than one large door to accommodate more than one bay.*

Outbuildings: Siding and Trim

- *Brick, weatherboard, and board-and-batten are typical siding materials.*
 - *Exterior siding may match the existing contributing building's original siding; otherwise, siding should be wood or smooth cement-fiberboard lap siding with a maximum exposure of five inches (5"), wood or smooth cement-fiberboard board-and-batten or masonry.*
 - *Four inch (4" nominal) corner-boards are required at the face of each exposed corner.*
 - *Stud wall lumber and embossed wood grain are prohibited.*
 - *Four inch (4" nominal) casings are required around doors, windows, and vents within clapboard walls. Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.*
- Brick molding is required around doors, windows, and vents within masonry walls but is not appropriate on non-masonry clad buildings.*

2) Outbuildings should be situated on a lot as is historically typical for surrounding historic buildings.

Generally new garages should be placed close to the alley, at the rear of the lot, or in the original location of an historic accessory structure.

Lots without rear alleys may have garages located closer to the primary structure. The appropriate location is one that matches the neighborhood or can be documented by historic maps.

Generally, attached garages are not appropriate; however, instances where they may be are:

- *Where they are a typical feature of the neighborhood; or*
- *When the location of the attached garage is in the general location of an historic accessory building, the new garage is located in the basement level, and the vehicular access is on the rear elevation.*

Setbacks & Site Requirements.

- *To reflect the character of historic outbuildings, new outbuildings for duplexes should not exceed the requirements for outbuildings for the entire lot and should not be doubled. The most appropriate configurations would be two 1-bay buildings with or without parking pads for additional spaces or one 2-bay building.*
- *A DADU or outbuilding may only be located behind the principal structure in the established rear yard. The DADU or outbuilding is to be subordinate to the principal structure and therefore should be placed to the rear of the lot.*
- *There should be a minimum separation of 20' between the principal structure and the DADU or outbuilding.*
- *At least one side setback for a DADU or outbuilding on an interior lot, should generally be similar to the principle dwelling but no closer than 3' from each property line. The rear setback may be up to 3' from the rear property line. For corner lots, the DADU or outbuilding should match the context of homes on the street. If there is no context, the street setback should be a minimum of 10'.*

Driveway Access.

- *On lots with no alley access, the lot shall have no more than one curb-cut from any public street for driveway access to the principal structure as well as the detached accessory dwelling or outbuilding.*
- *On lots with alley access, any additional access shall be from the alley and no new curb cuts shall be provided from public streets.*

Parking accessed from any public street shall be limited to one driveway for the lot with a maximum width of twelve feet.

i. Utilities

Utility connections such as gas meters, electric meters, phone, cable, and HVAC condenser units should be located so as to minimize their visibility from the street.

Generally, utility connections should be placed no closer to the street than the mid point of the structure.

Power lines should be placed underground if they are carried from the street and not from the rear or an alley.

j. Public Spaces

Landscaping, sidewalks, signage, lighting, street furniture and other work undertaken in public spaces by any individual, group or agency shall be presented to the MHZC for review of compatibility with the character of the district.

Generally, mailboxes should be attached to the front wall of the house or a porch post. In most cases, street-side mailboxes are inappropriate.

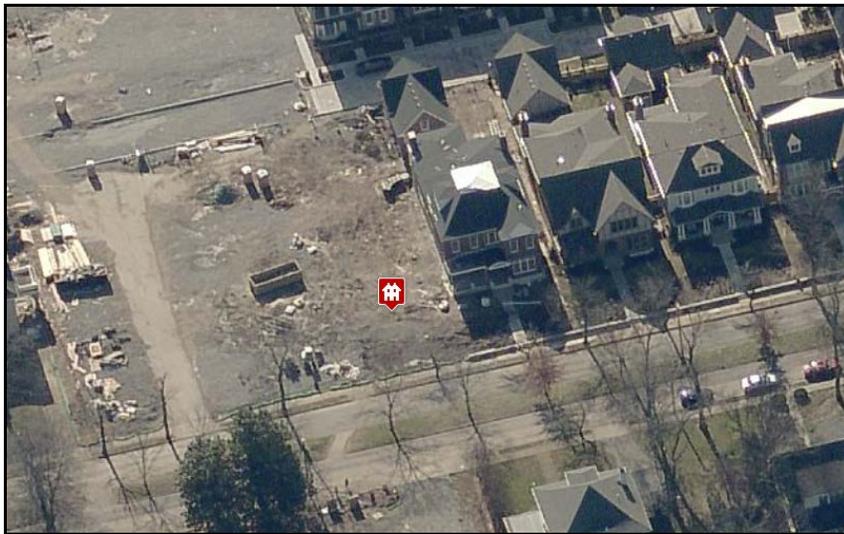


Figure 1. Lot 7, at 3629 Richland Avenue

Background: 3629 Richland Avenue is a currently a vacant lot (Figure 1). Formerly on the site was a non-contributing building that was part of the Welch College (formerly the Free Will Baptist Bible College) campus. The College has moved to a new location and the building has been demolished. The new owner of the college’s property plans 22 new infill houses within the Richland-West Neighborhood Conservation Zoning Overlay (Figure 2). To date, MHZC has approved infill and outbuildings for Lots 1, 2, 3, 4, 5, 6, 11, 12, 13, 14, 15, 16 and 17 (3657, 3653, 3649, 3641, 3637, 3633, 3613, 3609, 3701, 3703, 3614, 3612, and 3610 Richland Avenue, respectively). Several of these houses have been constructed (See photos at end of document).

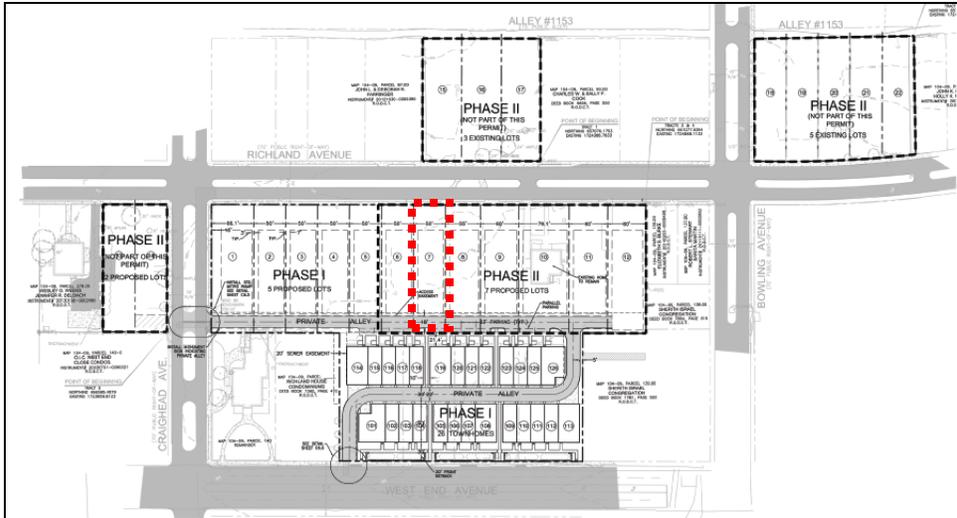


Figure 2. Overall site plan for the 22 infill houses planned for the Richland-West End Neighborhood Conservation Zoning Overlay. The red box indicates the site currently under **consideration**.

Analysis and Findings: Application is to construct a new single family infill and an outbuilding. The project requires a change to the left side setback. Base zoning requires a five foot (5') side setback and the applicant is proposing a three foot (3') side setback.

Height & Scale: The proposed infill will be two stories, with a maximum height of thirty-six feet (36') above the foundation at the front, and approximately thirty-eight feet (38') above grade. The infill will have an eave height of approximately twenty-two feet (22') above the foundation at the front. The foundation height will vary due to grade, but will be approximately twenty-four inches (24") at the front. Staff finds that the proposed height is similar to the heights of historic houses in the immediate vicinity, which range from thirty to forty-four feet (30' – 44'). It is also in keeping with what has been approved in the past for the infill houses in this development, notably, the property next door at 3633 Richland Avenue, which was approved in 2017 with a height of thirty-eight feet, six inches (38'6") above the foundation.

The lot is approximately fifty feet (50') wide. The house will be approximately thirty-nine feet wide (39') wide at the front. This width is similar to the widths of the historic houses in the immediate vicinity, which range from thirty-eight to sixty-five feet (38' - 65'). The infill houses approved for Lots 1, 2, 3, 4, 5 and 6 of this development are all also approximately forty feet (40') wide.

Staff recommends verification of the construction height of the foundation and floor systems in the field to ensure that the finished floor line of the new construction is compatible with the historic context. With this condition, staff finds that the height and scale meet Sections II.B.1.a. and II.B.1.b. of the design guidelines.

Setback & Rhythm of Spacing: The proposed infill will have a front setback of forty feet (40'), which will line up with the infill houses already approved by the Commission for this development, including Lot 6 immediately to its right.

The right side elevation will be seven feet (7') from the side property line, which meets the base zoning setback of five feet (5'). On the left side, base zoning requires a five foot (5') side setback, but the applicant is proposing to set the infill just three feet (3') from the side property line. Staff finds this reduced side setback to be appropriate because there are other homes in the immediate vicinity that do not meet the required five foot (5') side setback. In addition, the infill is part of a larger development, and the reduced setback will affect the parcel next door at 3625 Richland Avenue, which is also part of the larger development. Staff has yet to review the site plan for 3625 Richland Avenue, but has directed the applicant that the right side of No. 3625 needs to be set seven feet (7') from the side property line. This will ensure there is at least ten feet (10') in between nos. 3629 and 3625 Richland Avenue and that the reduced side setback will not affect overall rhythm of spacing on the street. For Lots 1, 2, 3, 4, 5 and 6 of this development, the Commission has approved similar setback determinations.

Staff finds that the proposed setbacks to be similar to the immediate historic context and to meet Section II.B.1.c. of the design guidelines.

Materials:

	Proposed	Color/ Texture	Approved Previously or Typical of Neighborhood	Requires Final Review
Foundation	Cast Stone	Unknown	Yes	Yes
Primary Cladding	Brick	Unknown	Yes	Yes
Lintels and Sills	Brick	Unknown	Yes	Yes
Primary Roofing	Asphalt shingle	Unknown	Yes	Yes
Chimney	Brick	Unknown	Yes	Yes
Windows	Not indicated	Unknown	Unknown	Yes
Doors	Not indicated	Unknown	Unknown	Yes
Porch Roof	Asphalt shingle	Unknown	Yes	Yes
Porch floor	Unknown	Unknown	Unknown	Yes
Front Porch Columns	Brick	Unknown	Unknown	Yes
Porch Steps	Unknown	Unknown	Unknown	Yes
Covered walkway roofing	Asphalt shingle	Unknown	Unknown	Yes

Covered walkway columns	Unknown	Unknown	Unknown	Yes
Driveway	Not indicated	N/A	Yes	Yes
Walkways	Not indicated	N/A	Yes	Yes

Staff recommends approval of stone and brick samples, all windows and doors, the roof shingle color, the materials of the porch floor and steps, the materials of the rear walkway columns and the material of the driveway and walkway. With these approvals, staff finds that the known materials meet Section II.B.1.d. of the design guidelines.

Roof form: The infill’s primary roof form is hipped on the front and side elevations with a 10/12 slope. Beyond the primary hip is a secondary hipped roof with a 6/12 slope. The front porch roof will have a 4/12 slope.

Staff finds that the proposed roof forms are appropriate for a two-story infill house in the overlay, and finds that the roof forms meet Section II.B.1.e. of the design guidelines.

Orientation: The house is oriented towards Richland Avenue, which is appropriate. There is a partial-width covered entry porch at the central front door. Most historic houses in the Richland-West End Neighborhood have partial or full-width front porches.

A front walkway will be added from the sidewalk to the front porch. Vehicular access to the street will be via a new private alley created at the rear of the lot. Staff finds that the infill’s orientation meets Section II.B.1.f. of the design guidelines.

Proportion and Rhythm of Openings: The proposed windows on the infill are generally twice as tall as they are wide, thereby meeting the historic proportion of window openings. There are no large expanses of wall space without a window or door opening. On the right side elevation the applicant has added a blind window to break up a long expanse of wall – the Commission has approved this treatment in other houses on the former Welch College campus. All window groupings have a four to six inch (4”-6”) mullion in between the individual window openings. On the front elevation, there is a pair of nearly square windows in the center bay, below similar windows in the dormer. Staff finds these to be appropriate, because they are an accent, not the dominant window form, and because windows of this type are seen on historic examples. Similar windows are found on the left elevation, Staff finds these to be appropriate, because the majority of them are over forty-five feet (45’) back from the front of the house and because they are used sparingly. Staff finds that the infill’s proportion and rhythm of openings meet Section II.B.1.g. of the design guidelines.

Appurtenances & Utilities: The proposal includes a covered walkway from the garage to the house, which the Commission has approved in the past. The materials of the driveway at the rear, the covered walkway from the house to the garage and the walkway leading to the front porch from the sidewalk are not indicated and should be approved by Staff. The HVAC unit is proposed to be about twenty feet (20’) from the front wall of

the house. The Commission has approved HVAC units in this location for this development in the past. With these conditions, Staff finds that the infill meets Section II.B.1.i. of the design guidelines.

Outbuilding: The outbuilding will not contain a dwelling unit. This site is zoned for single family, and DADUs are not permitted under the current zoning.

Site Planning & Setbacks:

	MINIMUM	PROPOSED
Building located towards rear of lot		Yes
Space between principal building and DADU/Garage	20'	11'*
Rear setback	5'	35'4"
L side setback	5'	3'**
R side setback	5'	~20'
How is the building accessed?		New alley
If the building is two-bay and the vehicular doors face the street, are there two different doors rather than one large door?		N/A

*The Commission typically requests to see at least twenty feet (20') between the primary structure and the outbuilding. The applicant is proposing just eleven feet (11') in between the structures. The Commission has approved a shorter distance of ten feet (10') in between the primary structures and the outbuildings for Lots 1, 2, 3, 4 and 5 of this development. Staff recommends approval of the distance between the infill and the outbuilding for Lot 7. The overall development is creating a new alley at the rear of the lots, which will make the back portion of the lot unavailable for building. Approximately the back thirty feet (30') of the lot is used for the alley. The outbuilding cannot be pushed any further to the rear because of the new alley. Therefore, staff finds that the distance in between the primary house and the outbuilding to be sufficient.

** The Commission has established that outbuildings can be as little as five feet (5') from the rear property line. The proposed outbuilding will be over thirty feet (30') from the rear property line, thereby meeting the design guidelines. Base zoning requires a five foot (5') side setback for outbuildings with footprints over seven hundred square feet (700 sq. ft.). The outbuilding will meet the right side setback, but will require a side setback determination on the left side property line. It will be just three feet (3') from the left side property line rather than the required five feet (5'). Staff finds the proposed three foot (3') side setback to be appropriate because it will line up with the setback of the proposed infill. In addition, historically, outbuildings were located close to or on the side property lines. MHZC approved three foot (3') left side setbacks for Lots 1, 2, 3, 4, 5, and 6 of this development.

Massing Planning:

	Infill	Potential maximums (heights to be measured from grade)	Proposed (should be the same or less than the lesser number to the left)
Ridge Height	36'	25'	25'
Eave Height	22'	17'	~16'

The proposed is a two-story building on a lot greater than 10,000 square feet. This lot is 10,050 square feet.

	Lot is more than 10,000 square feet	Proposed footprint
Maximum Square Footage	1,000 sq. ft.	~836 sq. ft.

Roof Shape & Elements:

Shape

Proposed Element	Proposed Form	Typical of district?
Primary form	Cross gable	Yes
Primary roof slope	8/12	Yes

Elements

	YES	NO
If dormers are used, do they cover less than 50% of the roof plane where they are located as measured from side-to-side?	N/A	
If dormers are used, do they sit back from the wall below by at least 2'?	N/A	
Is the roof pitch at least 4/12?	Yes	

Materials:

	Proposed	Color/Texture	Approved Previously or Typical of Neighborhood	Requires final Review
Foundation	Brick	Unknown	Yes	Yes
Cladding	Brick	Unknown	Yes	Yes
Roofing	Asphalt Shingle	Unknown	Unknown	Yes
Trim	Not indicated	Unknown	Unknown	Yes
Driveway	Not indicated	N/A	Yes	Yes
Windows	Not indicated	Unknown	Unknown	Yes
Pedestrian	Not indicated	Unknown	Unknown	Yes

Door				
Vehicular Door	Not indicated	Unknown	Unknown	Yes

With the final approval of all materials, staff finds that the proposed outbuilding meets Section II.B.1.h of the design guidelines.

Recommendation Summary: Staff recommends approval of the project with the following conditions:

1. The finished floor height be consistent with the finished floor heights of neighboring historic houses, to be verified by MHZC staff in the field;
2. Staff approve the following materials prior to purchase and installation: stone and brick samples, all windows and doors, the roof shingle color, the materials of the porch floor and steps, the materials of the rear walkway columns and the material of the driveway and walkway.
3. Staff approve the materials for the outbuilding.
4. Staff approve the front setback in the field to ensure its appropriateness.

With these conditions, staff finds that the project meets Section II.B. of the *Richland-West End Neighborhood Conservation Zoning Overlay: Handbook and Design Guidelines*.

Richland Hall Lots Constructed to Date:



Lot 1, 3657 Richland Avenue, approved December 16, 2015



Lot 2, 3653 Richland Avenue, approved December 16, 2015



Lot 3, 3649 Richland Avenue, approved May 18, 2016



Lot 4, 3641 Richland Avenue, approved December 21, 2016



Lot 6, 3633 Richland Avenue, approved April 19, 2017, next door to 3629 Richland

Context Photos:



3608 Richland Avenue, diagonally across the street from the site at 3629 Richland Avenue



3600 and 3604 Richland Avenue, nearby historic houses.



3618 Richland Avenue, across the street from the site at 3629 Richland Avenue.



Former Davidson Hall, 3617 Richland Avenue (right) with Lot 11 of the development under construction to the left. This is three doors down from the site at 3629 Richland Avenue.



3628 Richland Avenue, diagonally across the street from 3629 Richland Avenue.




3632 and 3630 Richland Avenue, nearby historic houses.

RICHLAND HALL LOT 007

SITE PLAN
 LAST CHECKED:
 06.07.2018
 JRP
 S:\Projects\Richland Hall (Welch)\RH007\RH007-SITEPLAN.dwg jrp:popercic 06/07/18 - 11:50 A


ISSUE DATE:
 07 JUN 2018
 REVISIONS:


C2
 SITE PLAN

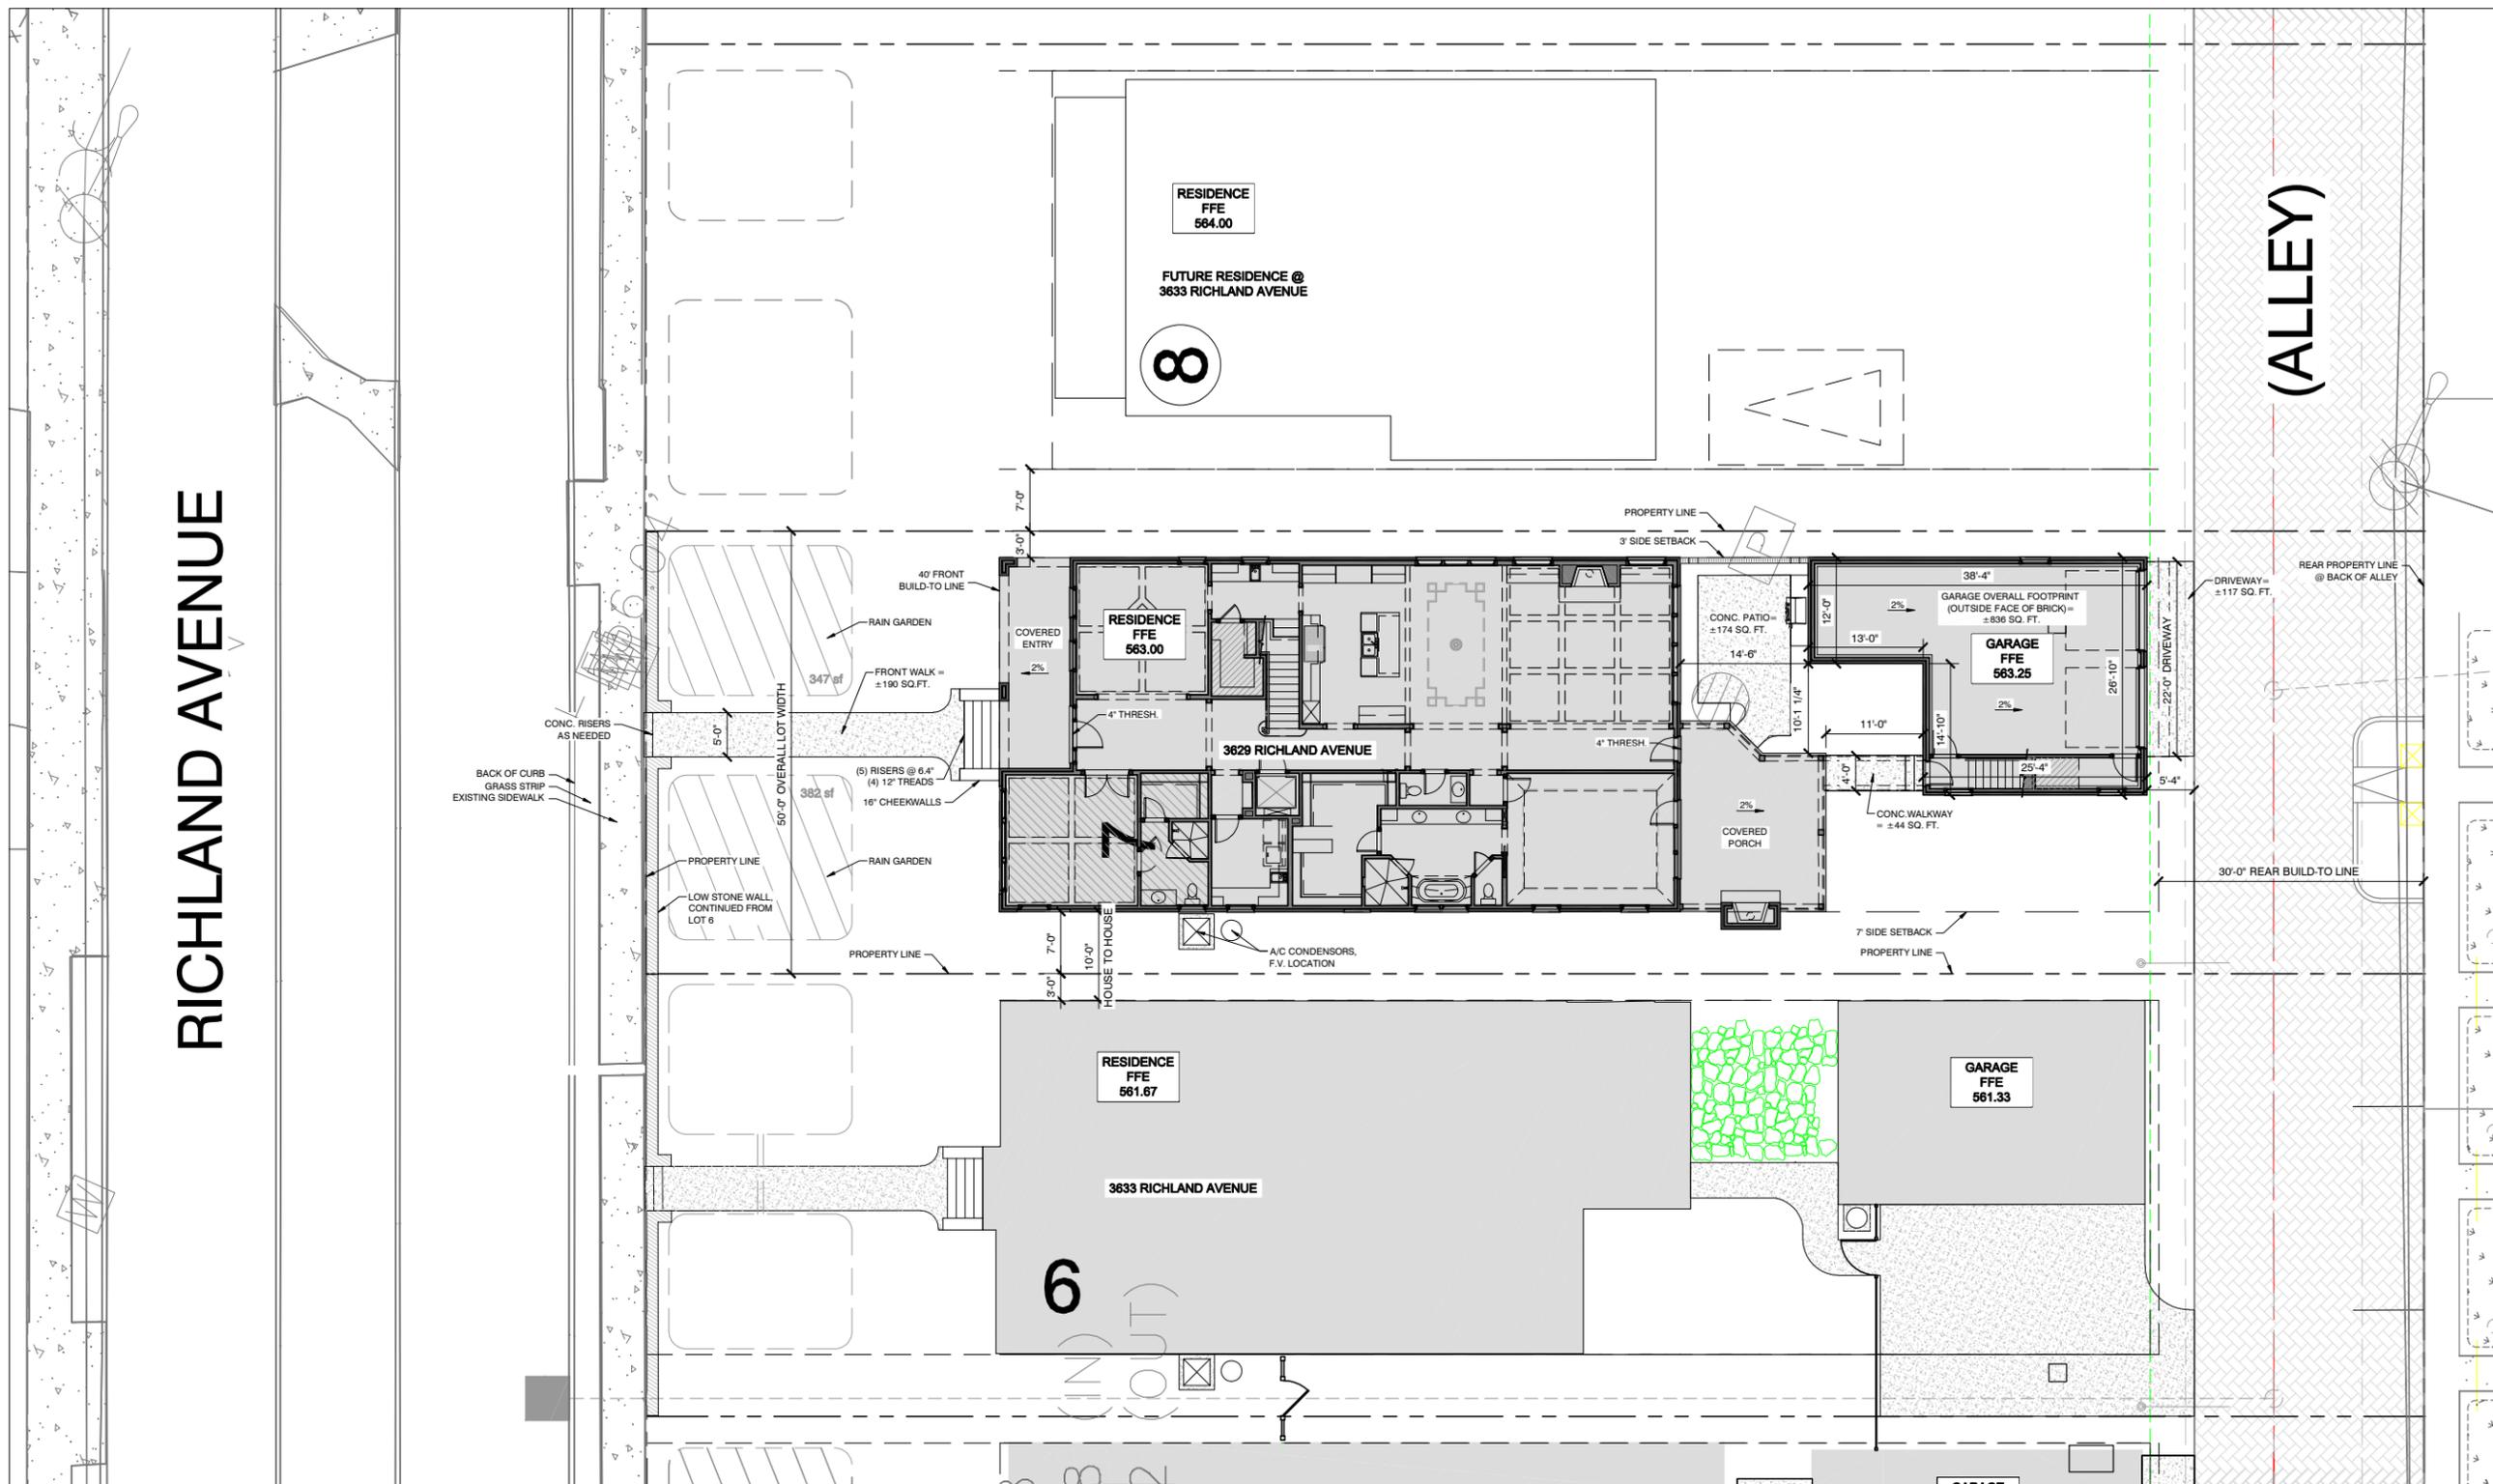

- NOTES:**
- * Contractors are responsible for confirmation of architecture, property lines, easements and building setbacks prior to construction.
 - DO NOT SCALE FROM THIS PLAN.**
 - * Confirm all spot elevations prior to construction.
 - * Builder is responsible for compliance with all applicable codes and ordinances.
 - * Provide proper grading and adequate drainage (2% minimum slopes away from residence & garage.) No cut or fill may be performed which will result in damage to any adjoining property.
 - * Any discrepancy found in these plans must be reported to the architect. Should discrepancies be found, continuation of work without review by the architect will be at builder's risk.
 - * This plan HAS NOT been prepared in accordance with handicapped guidelines or any other ADA considerations.
 - * No runoff calculations have been developed or used to size swales and/or inlets and pipes.

Lot 007 of Richland Hall
ADDRESS: 3629 Richland Ave.
PARCEL: 10409029600

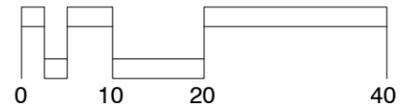

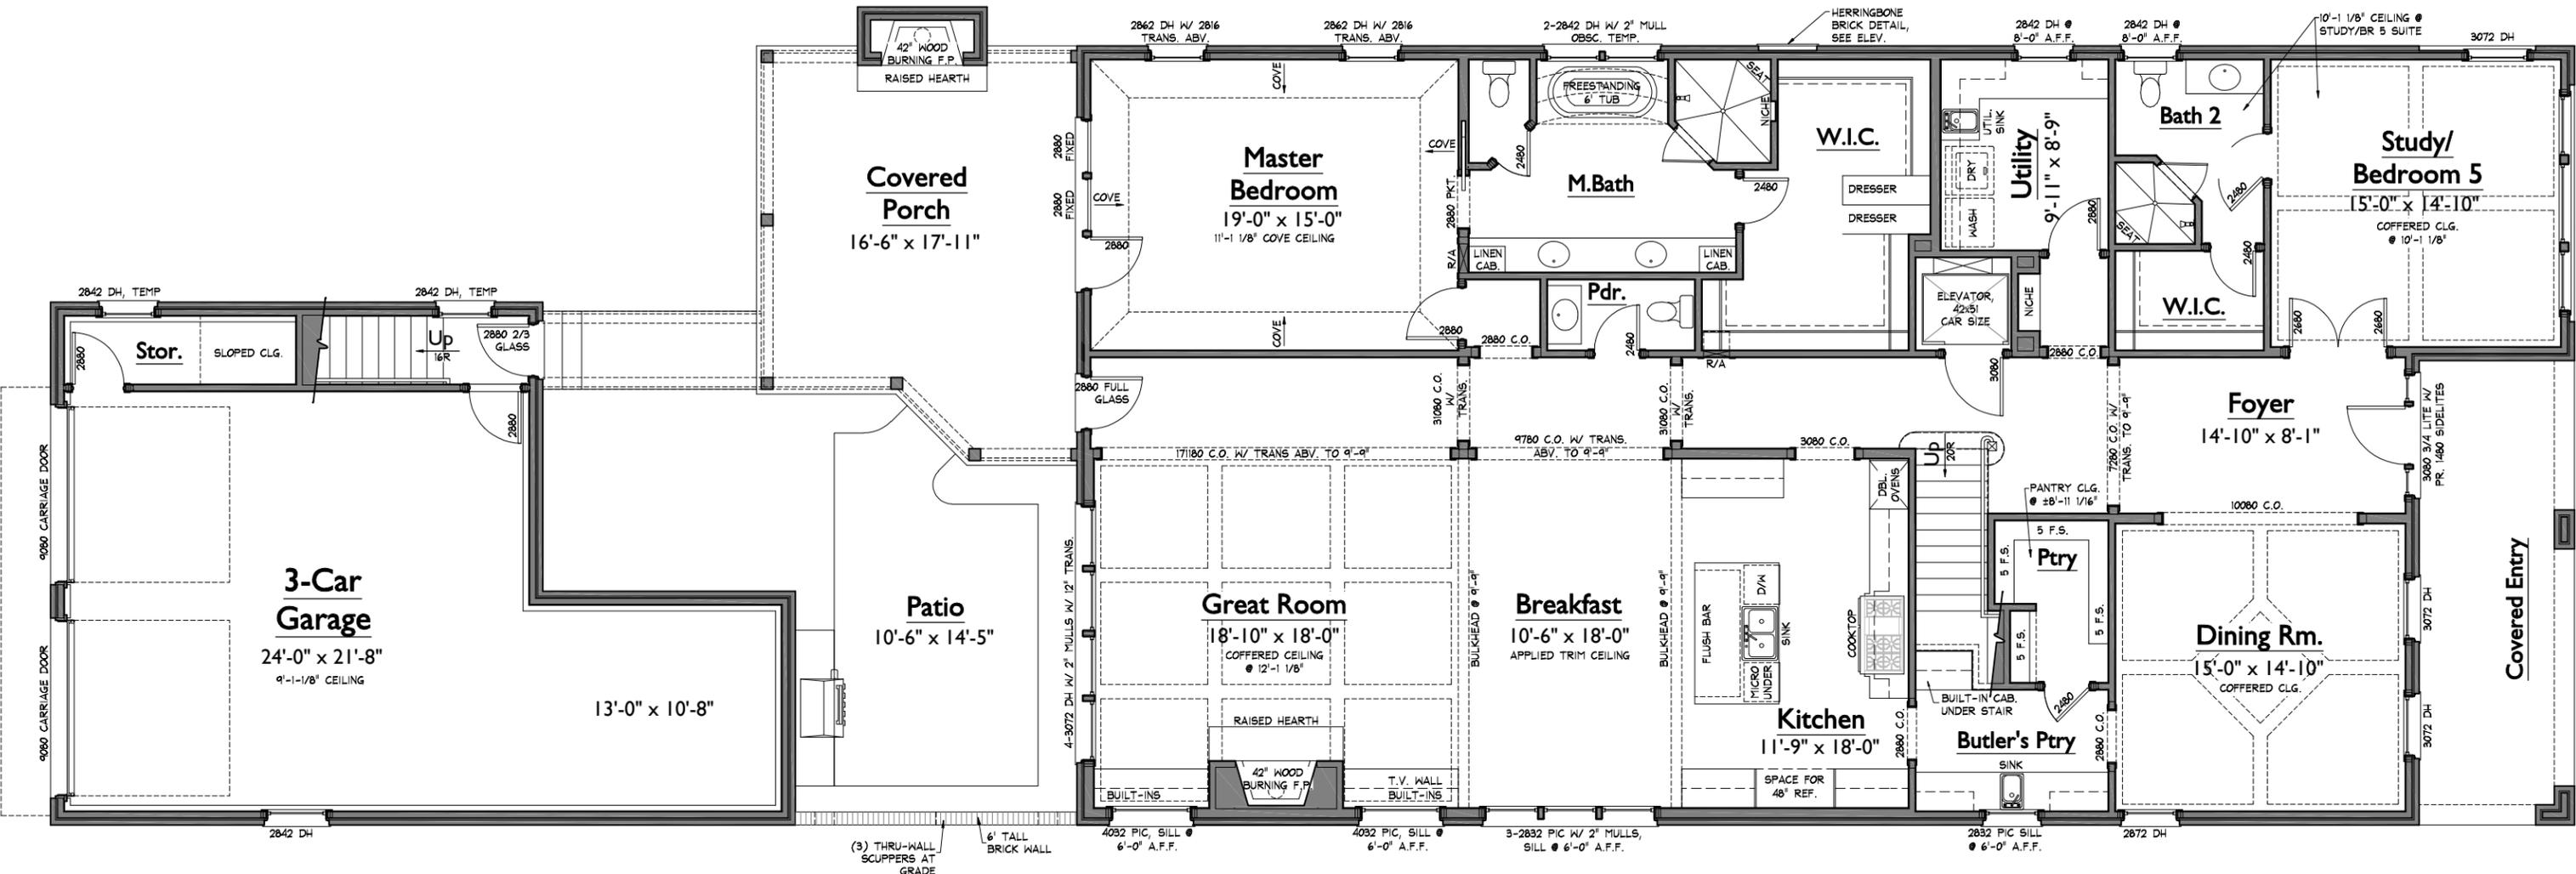

1 LOWER LEVEL FLOOR PLAN
1/8" = 1'-0"

GARAGE AREAS			
HEATED LIVING	BASEMENT	0	686
	FIRST FLOOR	0	
	SECOND FLOOR	686	
	TOTAL HEATED LIVING	686	
UNFIN. LIVING	UNFIN. BASEMENT	0	686
	UNFIN. FIRST FLOOR	0	
	UNFIN. SECOND FLOOR	0	
	TOTAL UNFIN. LIVING	0	
MECH./STOR/OTHER	UNFIN. STORAGE	0	1428
	GARAGE	742	
	COVERED PORCHES	0	
	TOTAL OTHER	742	
F	LAST CHECKED: 05.18.2018 JRP		

MAIN RESIDENCE AREAS			
HEATED LIVING	BASEMENT	0	5052
	FIRST FLOOR	2805	
	SECOND FLOOR	2247	
	TOTAL HEATED LIVING	5052	
UNFIN. LIVING	UNFIN. BASEMENT	0	5052
	UNFIN. FIRST FLOOR	0	
	UNFIN. SECOND FLOOR	0	
	TOTAL UNFIN. LIVING	0	
MECH./STOR/OTHER	UNFIN. STORAGE	0	5623
	COVERED ENTRY	191	
	COVERED PORCHES	380	
	TOTAL OTHER	571	
F	LAST CHECKED: 05.18.2018 JRP		

NOTE: ROOMS ON THIS PLAN ARE ANNOTATED WITH SIZES FOR DEPICTIVE PURPOSES ONLY AND MAY VARY DUE TO A NUMBER OF CONDITIONS. ROOM SIZES ARE MEASURED TO FRAMING WHERE WALLS ARE PRESENT. WHERE NO WALLS ARE PRESENT BETWEEN SPACES, ROOMS AS SIZED MAY OVERLAP SLIGHTLY OR NOT TOUCH.

RICHLAND HALL - LOT 007


RH007

FIRST FLOOR PLAN

S:\Projects\Richland Hall (Welch)\RH007\X-PP01.dwg julie.pogorek 06/06/18 - 3:50 P

LAST CHECKED:
06.06.2018
JRP


390 MALLORY STATION RD. SUITE 100
FRANKLIN, TN 37067
p. 615.503.9727 f. 615.503.9798

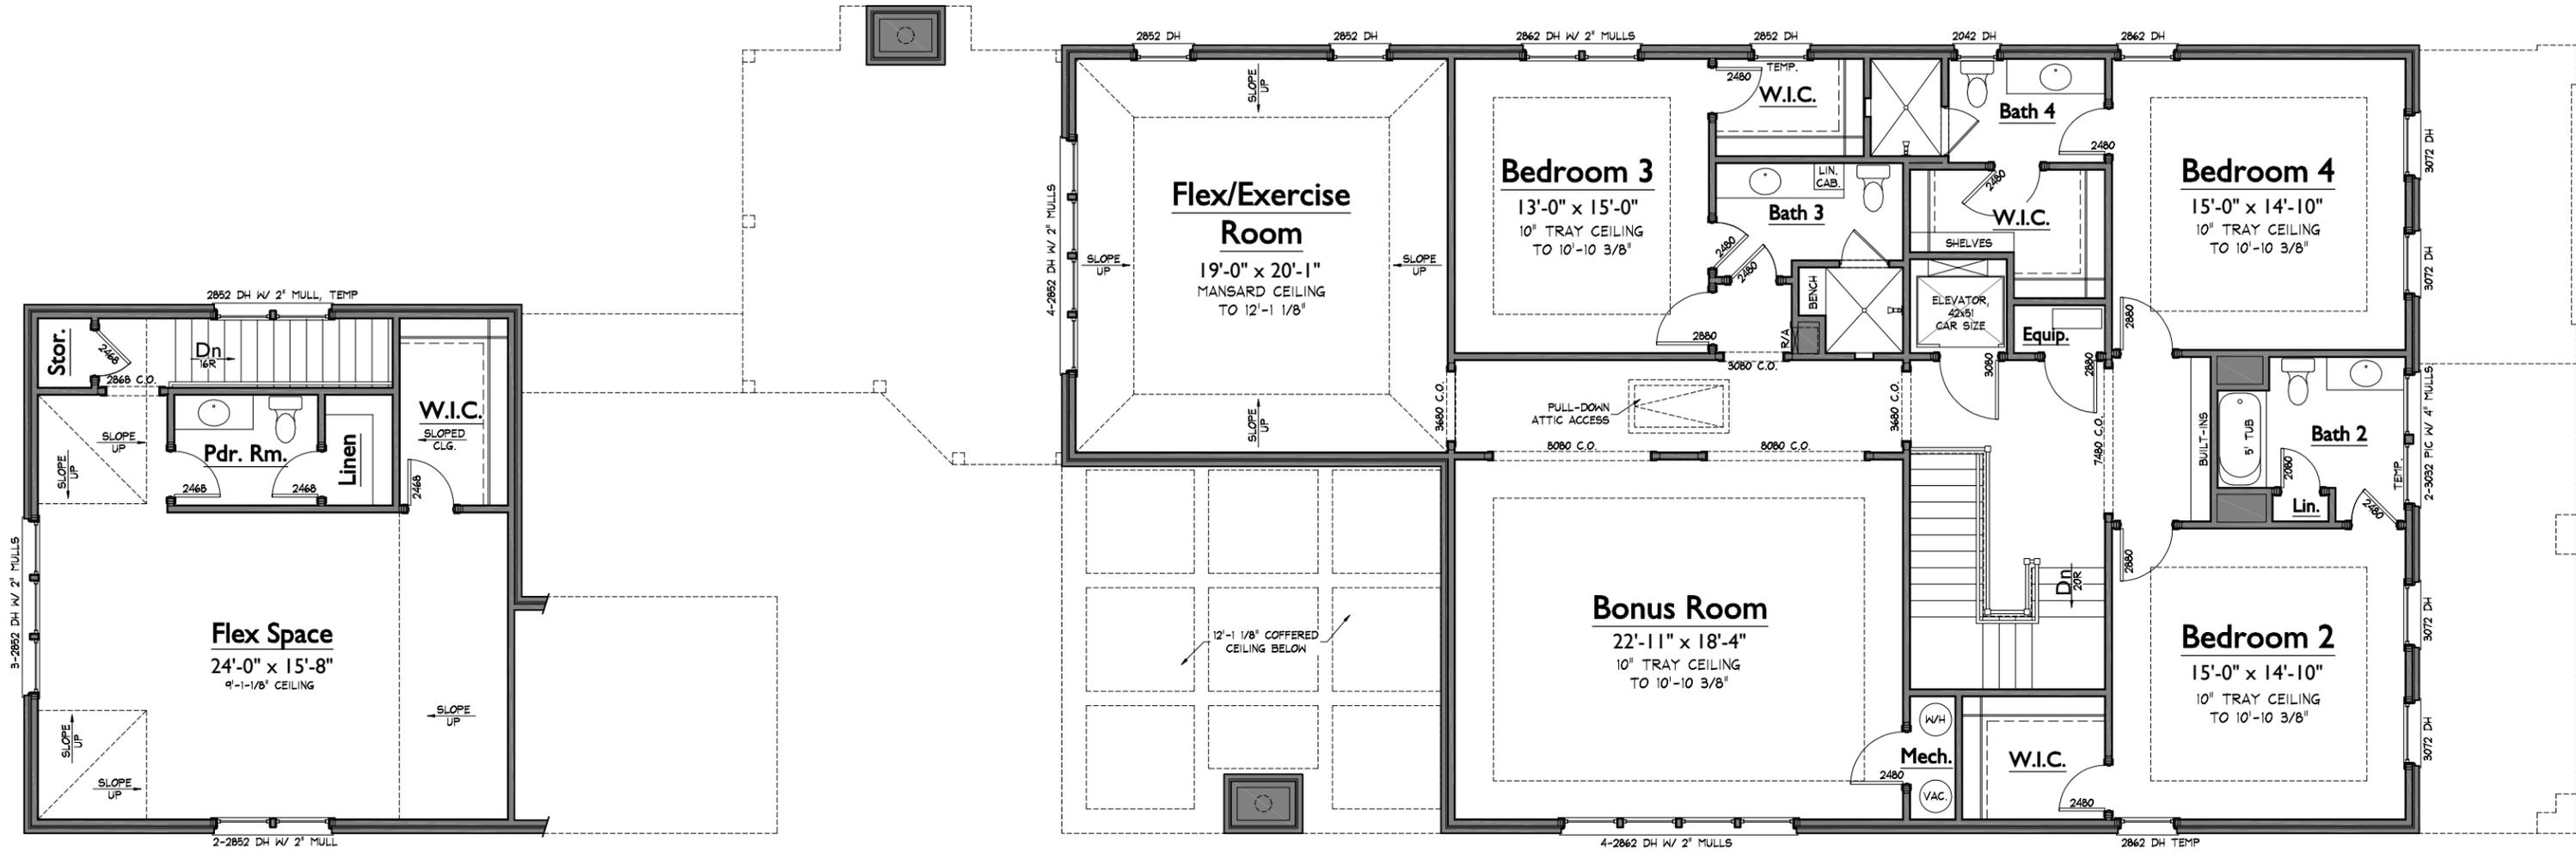

1 SECOND FLOOR PLAN
1/8" = 1'-0"

NOTE: ROOMS ON THIS PLAN ARE ANNOTATED WITH SIZES FOR DEPICTIVE PURPOSES ONLY AND MAY VARY DUE TO A NUMBER OF CONDITIONS. ROOM SIZES ARE MEASURED TO FRAMING WHERE WALLS ARE PRESENT. WHERE NO WALLS ARE PRESENT BETWEEN SPACES, ROOMS AS SIZED MAY OVERLAP SLIGHTLY OR NOT TOUCH.

RICHLAND HALL - LOT 007		 FORD CLASSIC HOMES
RH007		
SECOND FLOOR PLAN		LAST CHECKED: 06.06.2018 JRP
S:\Projects\Richland Hall (Welch)\RH007\X-FP02.dwg julie.pogorelc 06/06/18 3:50 P		
		390 MALLORY STATION RD. SUITE 100 FRANKLIN, TN 37067 p. 615.503.9727 f. 615.503.9798

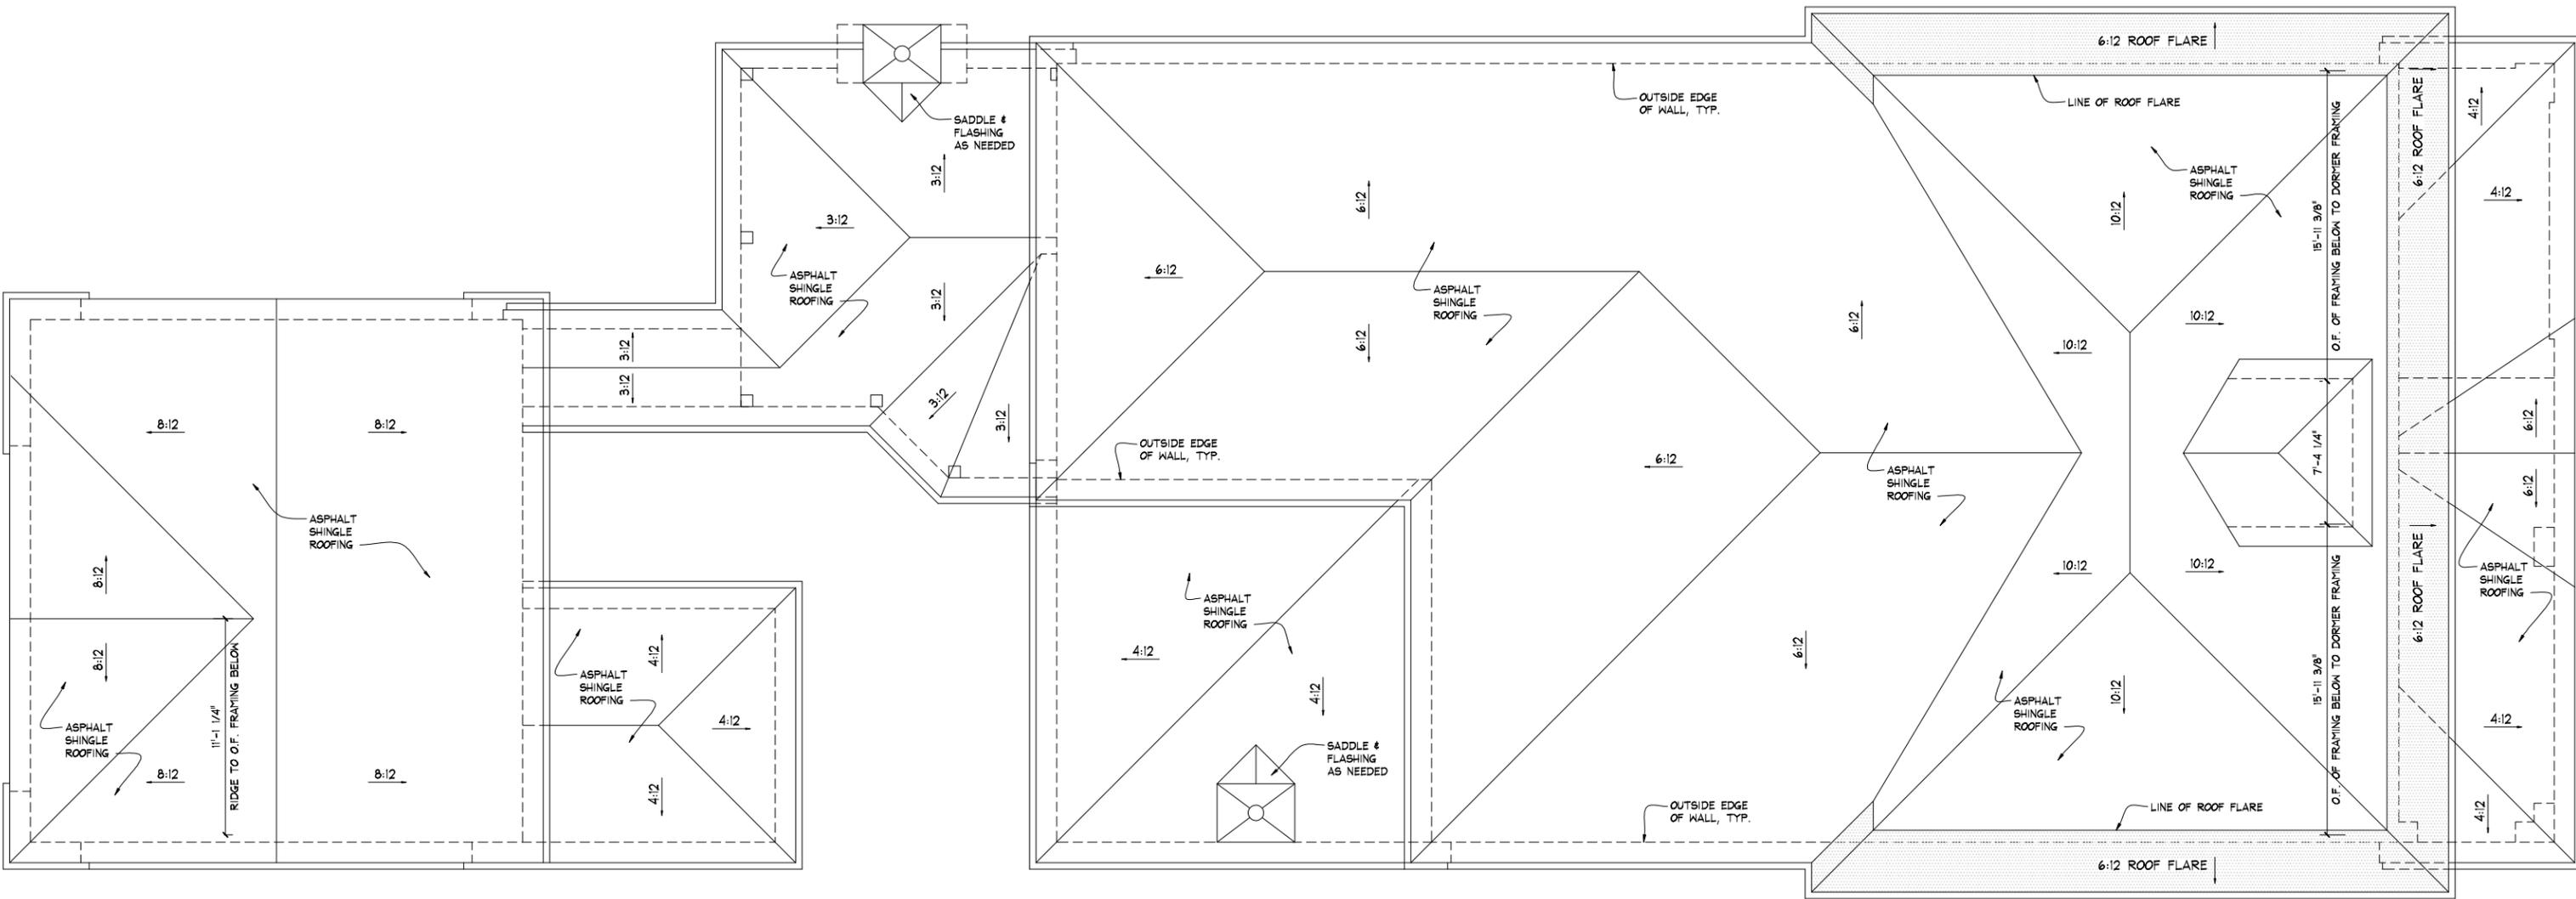

1 ROOF PLAN
1/8" = 1'-0"


RICHLAND HALL - LOT 007
RH007

ROOF PLAN


LAST CHECKED:
06.01.2018
JRP

S:\Projects\Richland Hall (Welch)\RH007\X-FP03.dwg julie.pogorelec 06/06/18 - 3:50 P

FORD
CLASSIC HOMES
390 MALLORY STATION RD. SUITE 100
FRANKLIN, TN 37067
p. 615.503.9727 f. 615.503.9798

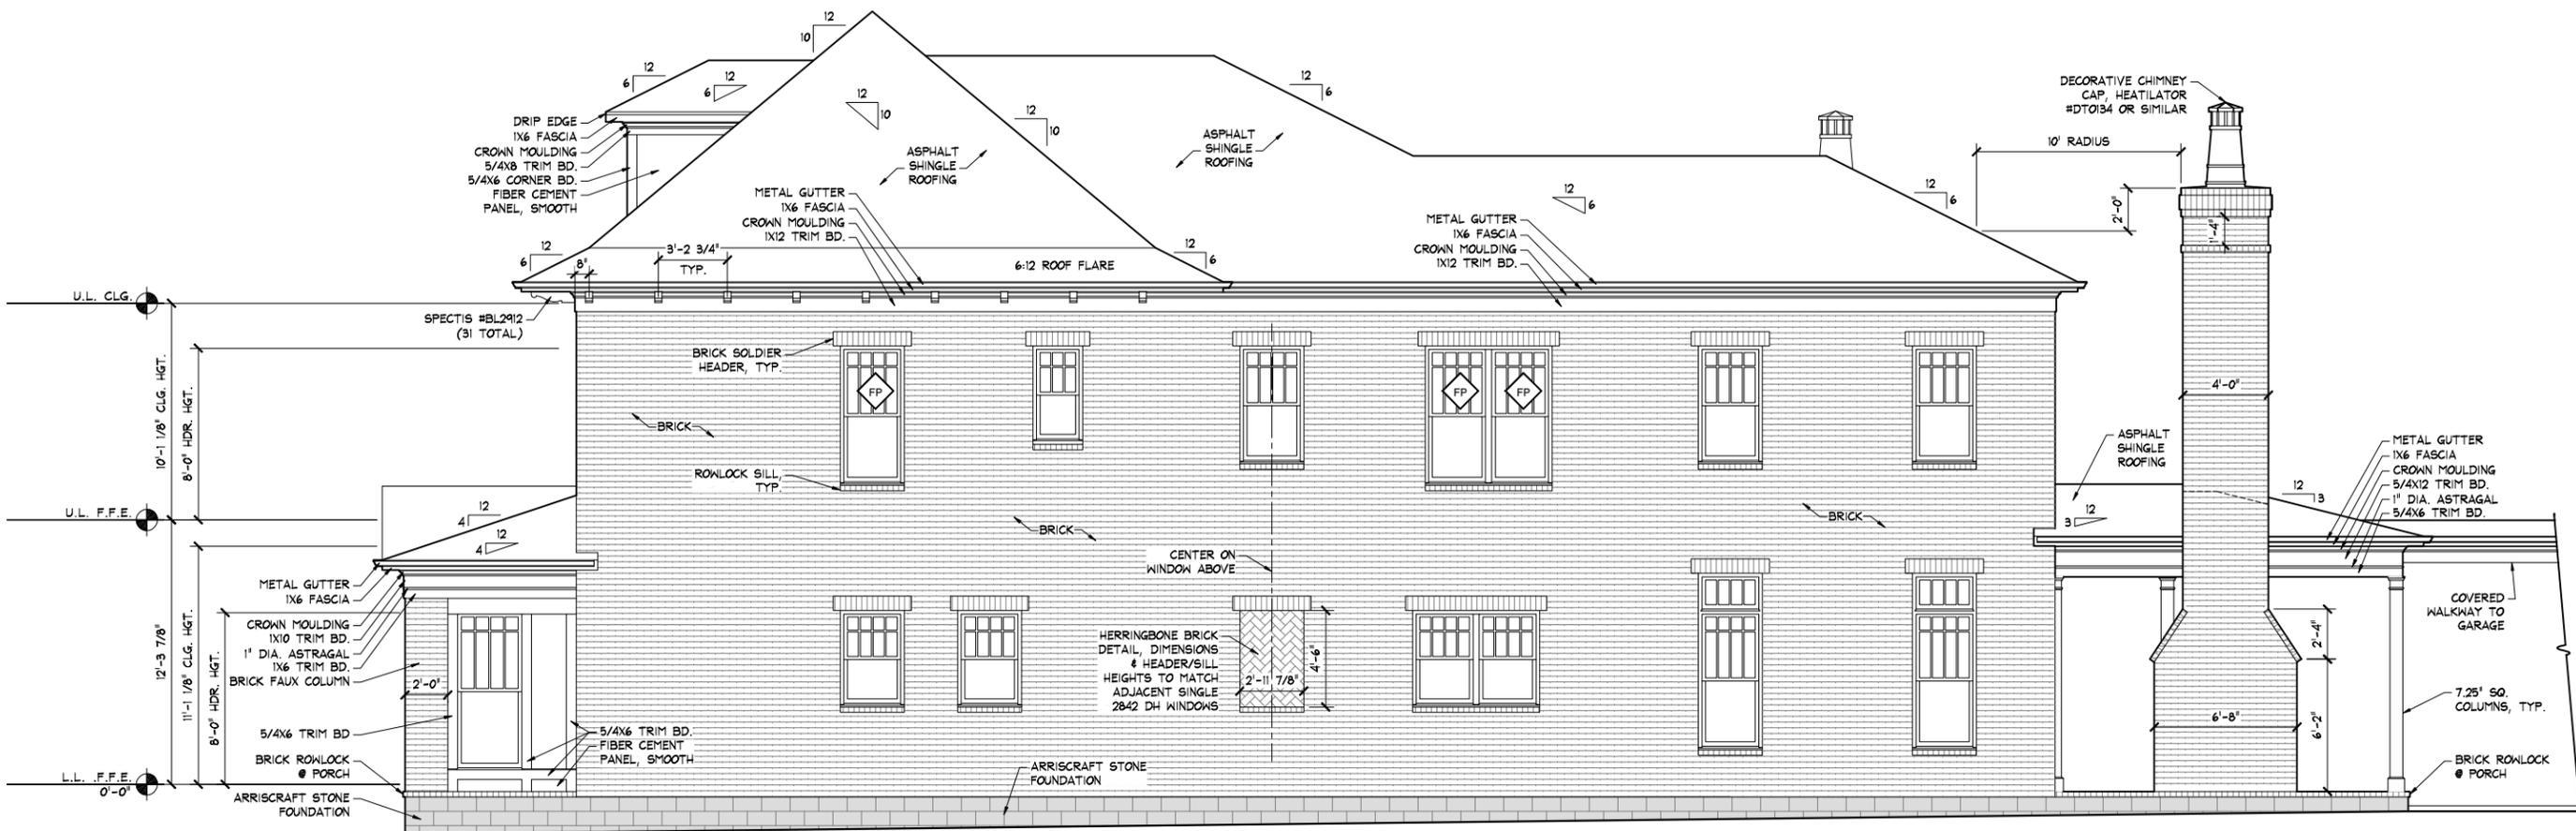

2 RIGHT ELEVATION
1/8" = 1'-0"

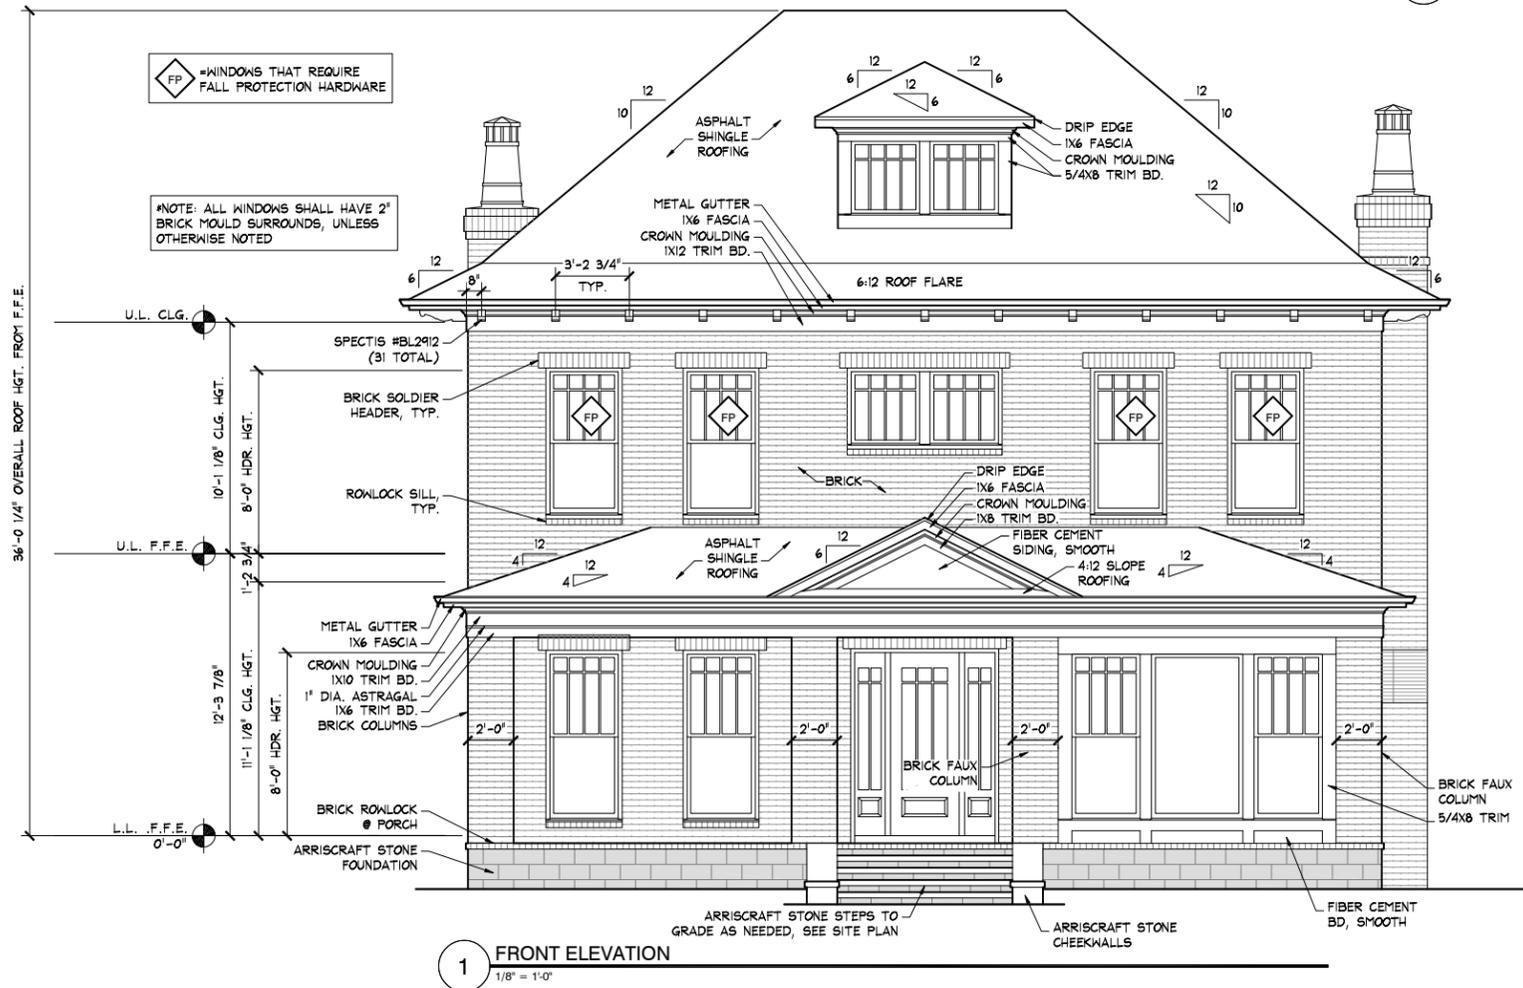

1 FRONT ELEVATION
1/8" = 1'-0"

RICHLAND HALL - LOT 007
RH007


ELEVATIONS

LAST CHECKED:
06.06.2018
JRP


S:\Projects\Richland Hall (Welch)\RH007\X-EL00.dwg julie.pogorelec 06/06/18 - 3:51 P

FORD
CLASSIC HOMES


390 MALLORY STATION RD. SUITE 100
FRANKLIN, TN 37067
p. 615.503.9727 f. 615.503.9798

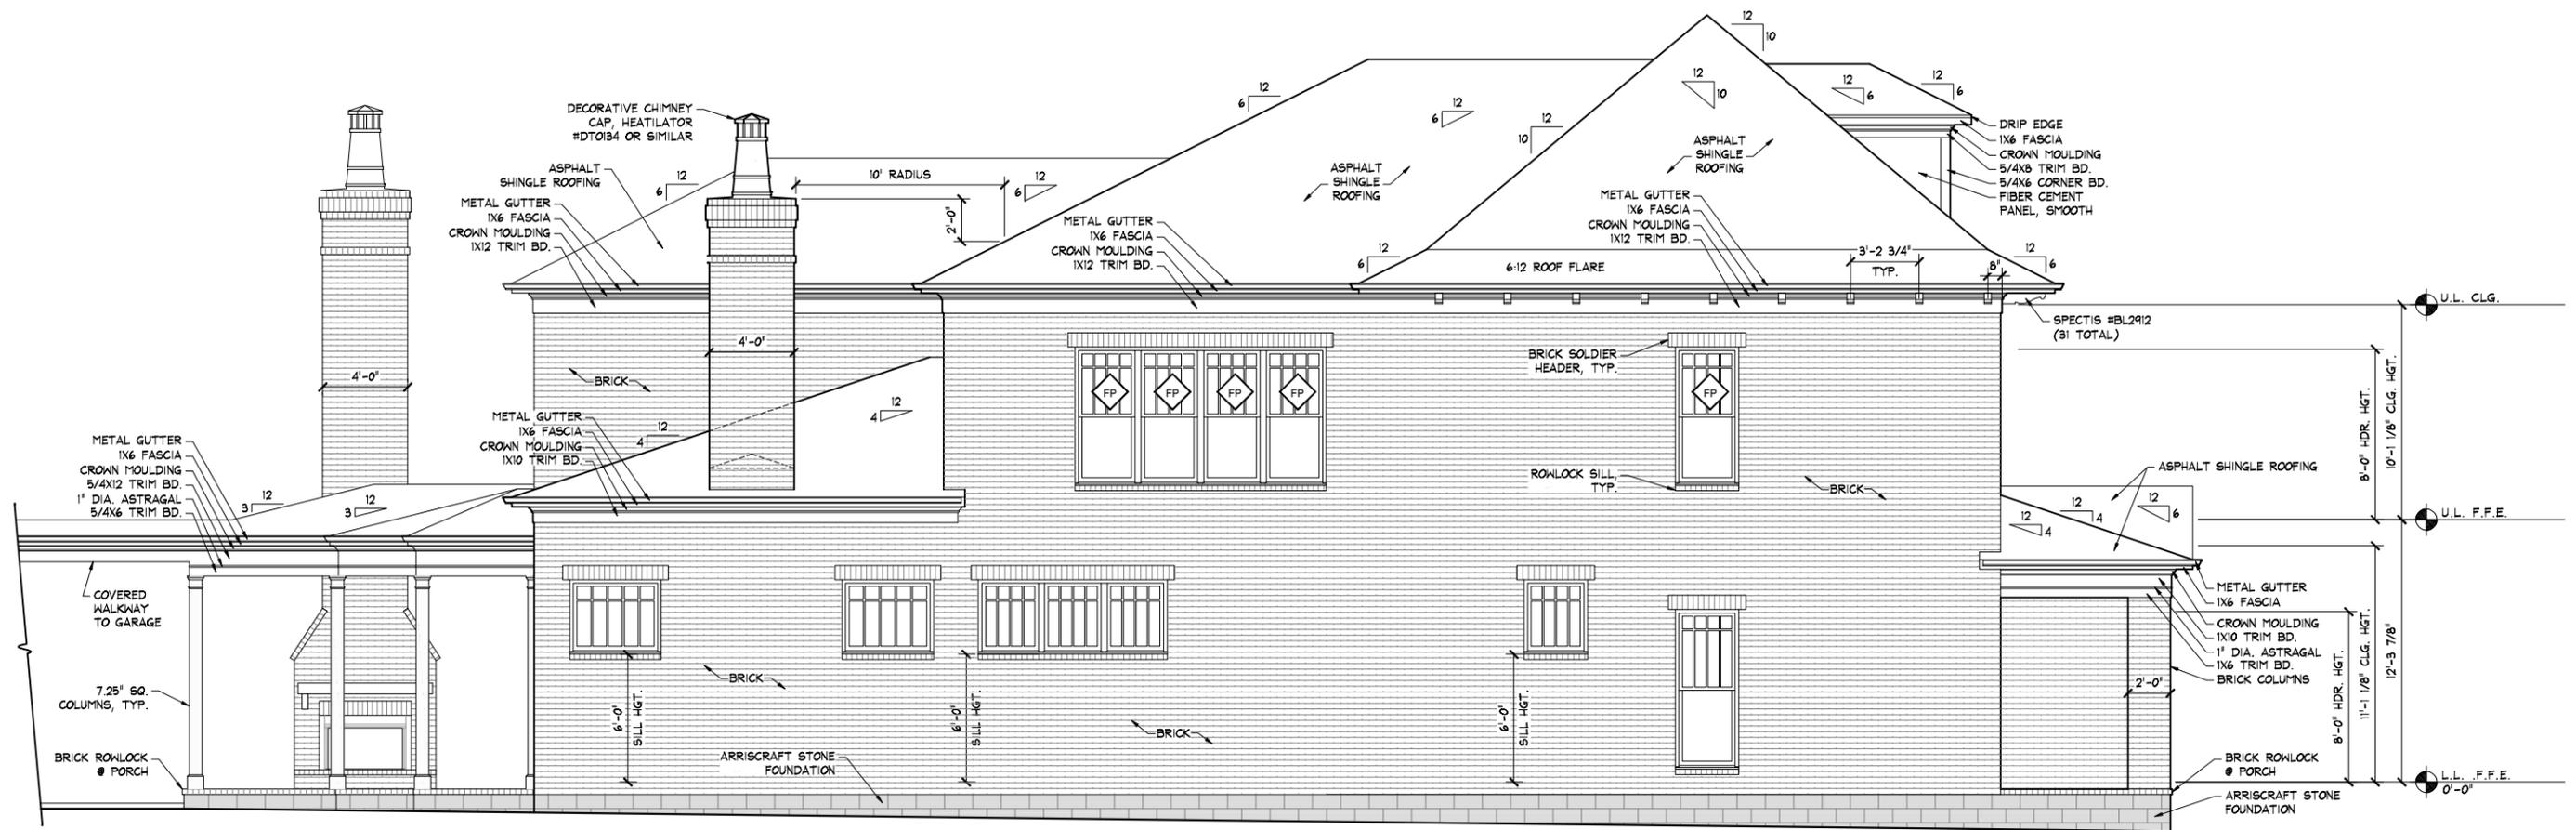


2 LEFT ELEVATION
1/8" = 1'-0"

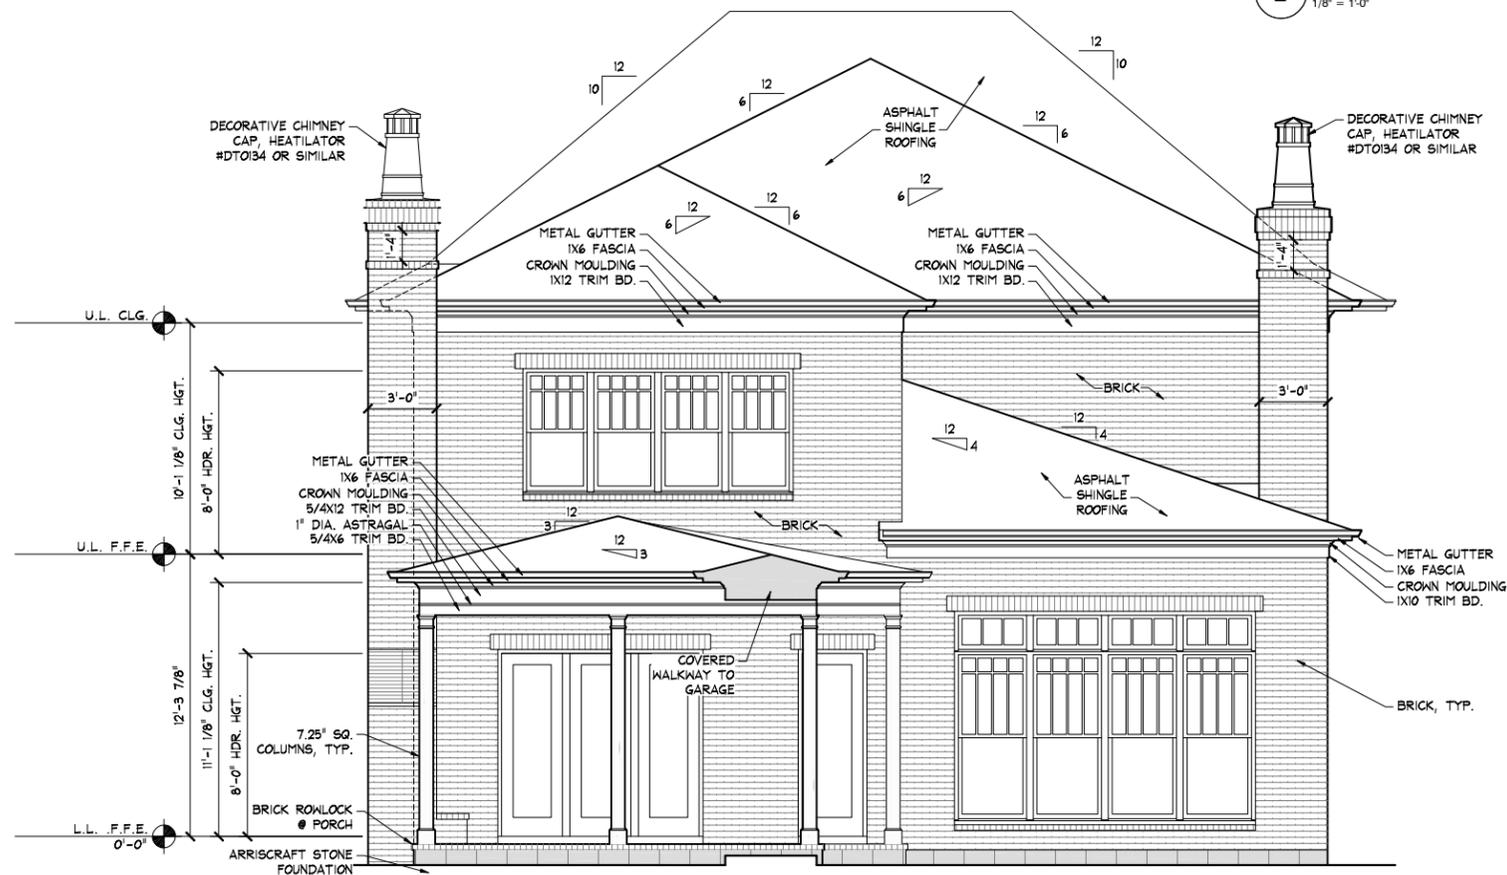


1 REAR ELEVATION
1/8" = 1'-0"

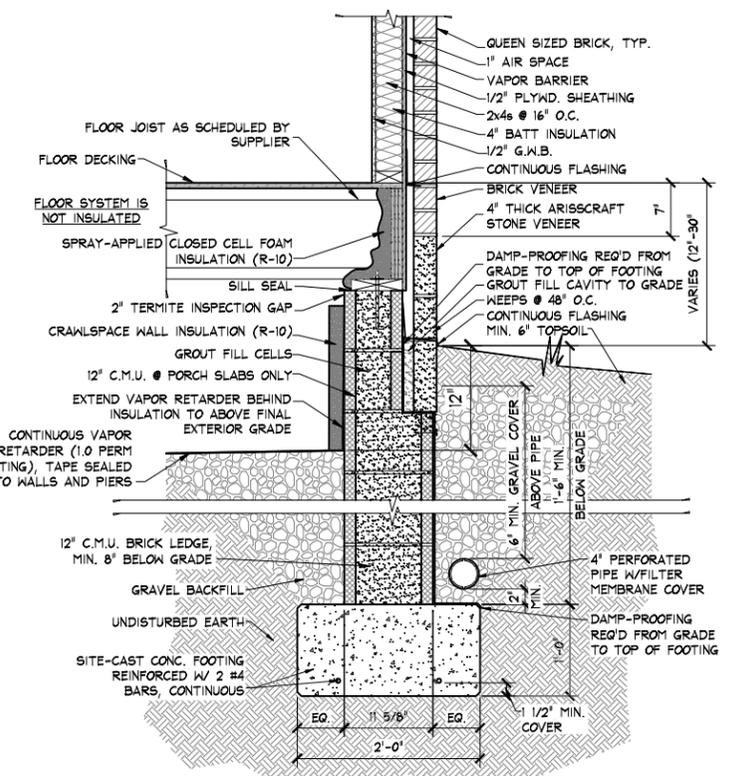


3 TYPICAL CRAWLSPACE DETAIL
1" = 1'-0"

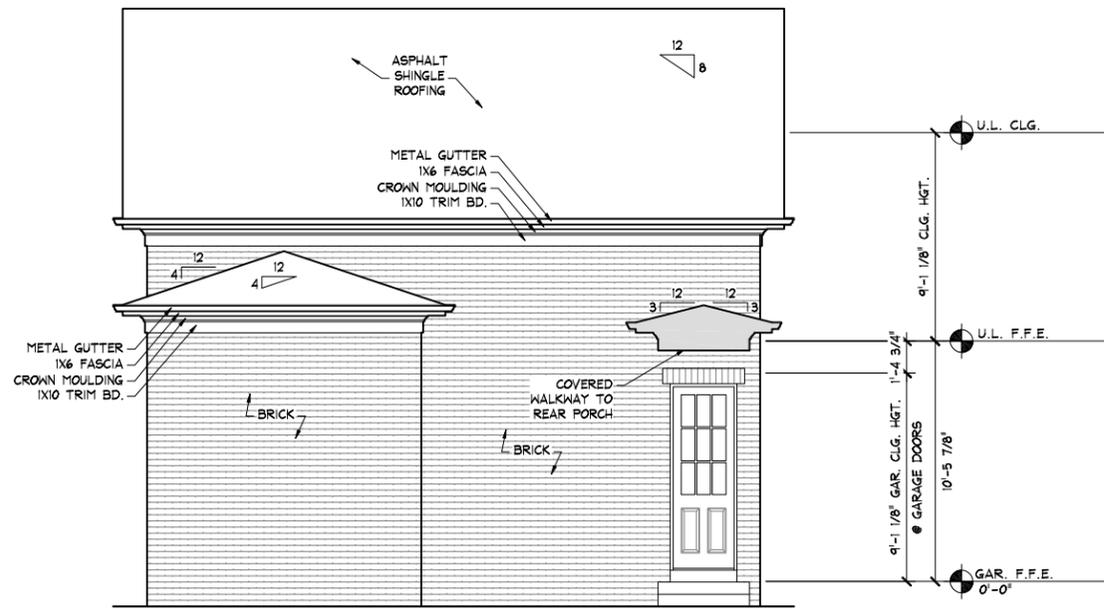


3 GARAGE REAR ELEVATION
1/8" = 1'-0"

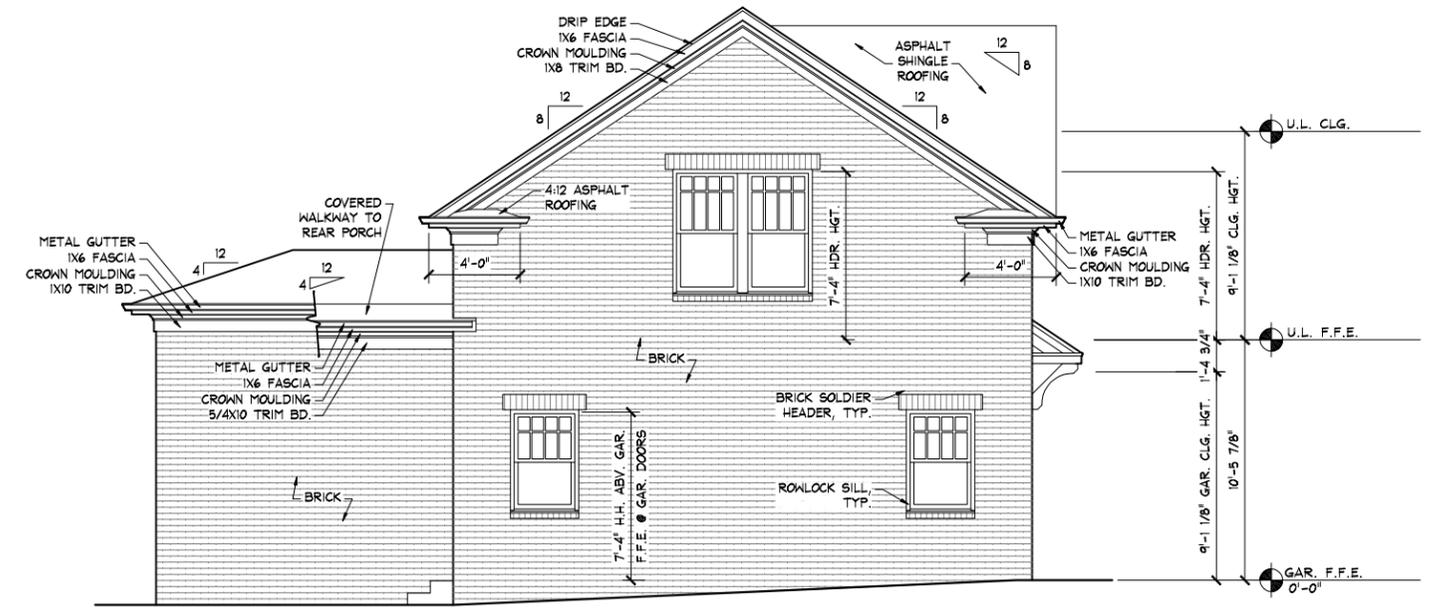

4 GARAGE LEFT ELEVATION
1/8" = 1'-0"

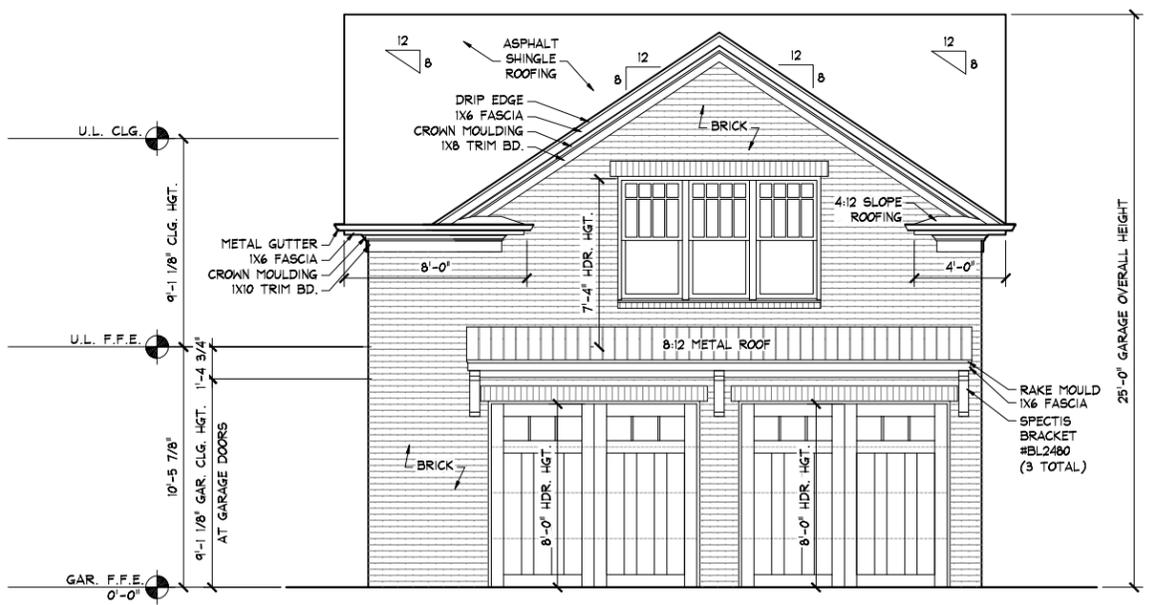

1 GARAGE FRONT ELEVATION
1/8" = 1'-0"

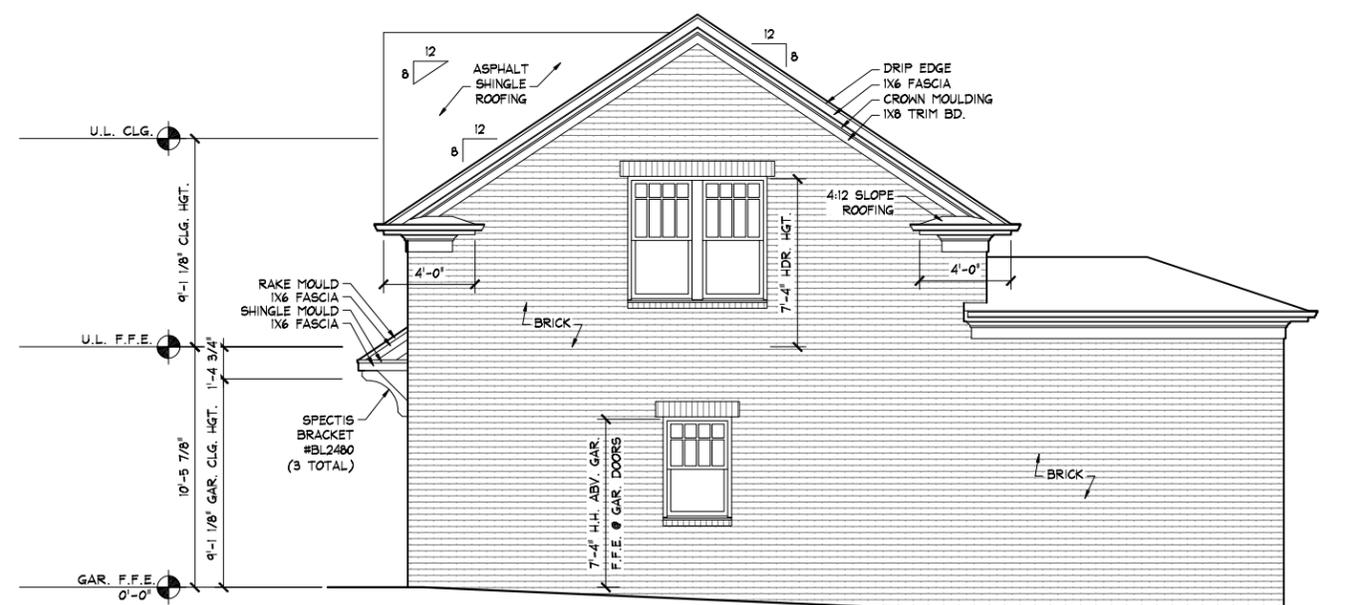

2 GARAGE RIGHT ELEVATION
1/8" = 1'-0"

RICHLAND HALL - LOT 007		 FORD CLASSIC HOMES
RH007		
GARAGE ELEVATIONS		LAST CHECKED: 06.06.2018 JRP
S:\Projects\Richland Hall (Welch)\RH007\X-EL00.dwg julie.pogorelec 06/06/18 - 3:51 P		
		390 MALLORY STATION RD. SUITE 100 FRANKLIN, TN 37067 p. 615.503.9727 f. 615.503.9798