

DAVID BRILEY
MAYOR



METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY

Metropolitan Historic Zoning Commission
Sunnyside in Sevier Park
3000 Granny White Pike
Nashville, Tennessee 37204
Telephone: (615) 862-7970
Fax: (615) 862-7974

STAFF RECOMMENDATION
3800 Princeton Ave
September 19, 2018


Application: New Construction - Addition
District: Richland-West End Neighborhood Conservation Zoning Overlay
Council District: 24
Map and Parcel Number: 104050158.00
Applicant: Matthew McCrary, Allard Ward Architects
Project Lead: Jenny Warren, jenny.warren@nashville.gov

<p>Description of Project: Application is for a rear addition.</p> <p>Recommendation Summary: Staff recommends approval with the following conditions</p> <ol style="list-style-type: none">1. Staff approve the roofing color, the side step material, the windows and the doors, prior to purchase and installation;2. The clay ridge tiles shall be retained; and,3. The HVAC shall be located behind the house or on either side, beyond the mid-point of the house; <p>finding that the project meets II.B of the <i>Richland-West End Neighborhood Conservation Zoning District: Handbook and Design Guidelines</i>.</p>	<p>Attachments</p> <p>A: Photographs B: Site Plan C: Elevations</p>
--	---

Vicinity Map:



Aerial Map:

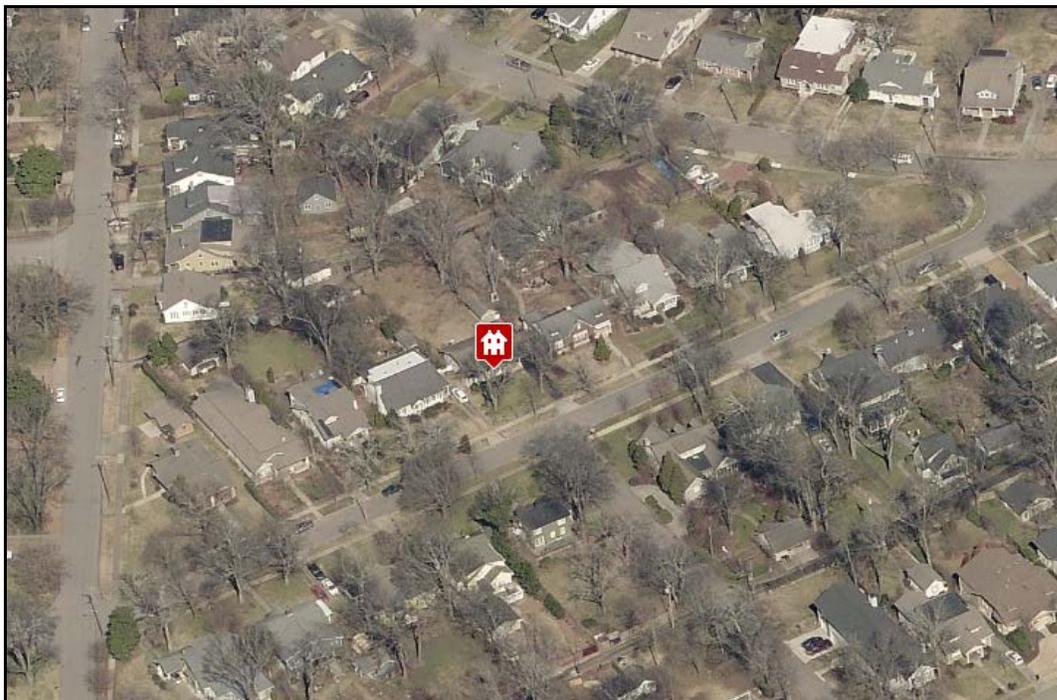

Applicable Design Guidelines:

II.B.1 New Construction

a. Height

The height of the foundation wall, porch roof(s), and main roof(s) of a new building shall be compatible, by not contrasting greatly, with those of surrounding historic buildings.

b. Scale

The size of a new building and its mass in relation to open spaces shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.

c. Setback and Rhythm of Spacing

The setback from front and side yard property lines established by adjacent historic buildings should be maintained. Generally, a dominant rhythm along a street is established by uniform lot and building width. Infill buildings should maintain that rhythm.

The Commission has the ability to determine appropriate building setbacks and extend height limitations of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. 17.40.410).

Appropriate setbacks will be determined based on:

- The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;*
- Setbacks of like structures historically found on the site as determined by historic maps, site plans or photographs;*
- Shape of lot;*
- Alley access or lack thereof;*
- Proximity of adjoining structures; and*
- Property lines.*

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity*
- Existing or planned slope and grade*

In most cases, an infill duplex should be one building, as seen historically in order to maintain the rhythm of the street. Detached infill duplexes may be appropriate in the following instances:

- There is not enough square footage to legally subdivide the lot but there is enough frontage and width to the lot to accommodate two single-family dwellings in a manner that meets the design guidelines;*
- The second unit follows the requirements of a Detached Accessory Dwelling Unit; or*
- An existing non-historic building sits so far back on the lot that a building may be constructed in front of it in a manner that meets the rhythm of the street and the established setbacks.*

d. Materials, Texture, Details, and Material Color

The materials, texture, details, and material color of a new building's public facades shall be visually compatible, by not contrasting greatly, with surrounding historic buildings. Vinyl and aluminum siding

are not appropriate.

T-1-11- type building panels, "permastone", E.F.I.S. and other artificial siding materials are generally not appropriate. However, pre-cast stone and cement fiberboard siding are approvable cladding materials for new construction; but pre-cast stone should be of a compatible color and texture to existing historic stone clad structures in the district; and cement fiberboard siding, when used for lapped siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal. The reveal for lap siding should not exceed 5". Larger reveals may be possible but should not exceed 8" and shall have mitered corners.

Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").

Four inch (4") nominal corner boards are required at the face of each exposed corner.

Stud wall lumber and embossed wood grain are prohibited.

Belt courses or a change in materials from one story to another are often encouraged for large two-story buildings to break up the massing.

When different materials are used, it is most appropriate to have the change happen at floor lines.

Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate.

Texture and tooling of mortar on new construction should be similar to historic examples.

Asphalt shingle is an appropriate roof material for most buildings. Generally, roofing should not have strong simulated shadows in the granule colors which results in a rough, pitted appearance; faux shadow lines; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof.

Generally front doors should be 1/2 to full-light. Faux leaded glass is inappropriate.

e. Roof Shape

The roof(s) of a new building shall be visually compatible, by not contrasting greatly, with the roof shape, orientation, and pitch of surrounding historic buildings.

Roof pitches should be similar to the pitches found in the district. Historic roofs are generally between 6/12 and 12/12.

Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range.

Generally, two-story residential buildings have hipped roofs.

Generally, dormers should be located on the roof. Wall dormers are not typical in the historic context and accentuate height so they should be used minimally and generally only on secondary facades. When they are appropriate they should be no wider than the typical window openings and should not project beyond the main wall.

f. Orientation

The orientation of a new building's front facade shall be visually consistent with surrounding historic buildings.

Porches

New buildings should incorporate at least one front street-related porch that is accessible from the front street.

Side porches or porte cocheres may also be appropriate as a secondary entrance, but the primary entrance should address the front.

Front porches generally should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals.

Parking areas and Driveways

Generally, curb cuts should not be added.

Where a new driveway is appropriate it should be two concrete strips with a central grassy median. Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

Duplexes

Infill duplexes shall have one or two doors facing the street, as seen on historic duplexes. In the case of corner lots, an entrance facing the side street is possible as long as it is designed to look like a secondary entrance.

In the case of duplexes, vehicular access for both units should be from the alley, where an alley exists. A new shared curb cut may be added, if no alley and no driveway exists, but the driveway should be no more than 12' wide from the street to the rear of the home. Driveways should use concrete strips where they are typical of the historic context. Front yard parking or driveways which end at the front of the house are not consistent with the character of the historic neighborhoods.

Multi-unit Developments

For multi-unit developments, interior dwellings should be subordinate to those that front the street.

Subordinate generally means the width and height of the buildings are less than the primary building(s) that faces the street.

For multi-unit developments, direct pedestrian connections should be made between the street and any interior units. The entrances to those pedestrian connections generally should be wider than the typical spacing between buildings along the street.

g. Proportion and Rhythm of Openings

The relationship of width to height of windows and doors, and the rhythm of solids (walls) to voids (door and window openings) in a new building shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district.

In most cases, every 8-13 horizontal feet of flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

Double-hung windows should exhibit a height to width ratio of at least 2:1.

Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.

Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings.

Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.

Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

i. Utilities

Utility connections such as gas meters, electric meters, phone, cable, and HVAC condenser units should be located so as to minimize their visibility from the street.

Generally, utility connections should be placed no closer to the street than the mid point of the structure.

Power lines should be placed underground if they are carried from the street and not from the rear or an alley.

j. Public Spaces

Landscaping, sidewalks, signage, lighting, street furniture and other work undertaken in public spaces by any individual, group or agency shall be presented to the MHZC for review of compatibility with the character of the district.

Generally, mailboxes should be attached to the front wall of the house or a porch post. In most cases, street-side mailboxes are inappropriate.

2. ADDITIONS

- a. Generally, an addition should be situated at the rear of a building in such a way that it will not disturb either front or side facades.

Placement

Additions should be located at the rear of an existing structure.

Connections to additions should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

Generally, one-story rear additions should inset one foot, for each story, from the side wall.

Additions should be physically distinguished from the historic building and generally fit within the shadow line of the existing building.

When an addition ties into the existing roof, the addition should be at least 6" below the existing ridge.

In order to assure that an addition has achieved proper scale, the addition should:

- No matter its use, an addition should not be larger than the existing house, not including non-historic additions, in order to achieve compatibility in scale. This will allow for the retention of small and medium size homes in the neighborhood. The diversity of housing type and size is a character defining feature of the historic districts.*
- Additions which are essentially a house-behind-a-house with a long narrow connector are not appropriate, as the form does not exist historically. Short or minimal connections that do not require the removal of the entire back wall of a historic building are preferred.*
- Additions should generally be shorter and thinner than the existing building. Exceptions may be made when unusual constraints make these parameters unreasonable, such as:*

- An extreme grade change*

- Atypical lot parcel shape or size*

In these cases, an addition may rise above or extend wider than the existing building; however, generally the addition should not be higher and extend wider.

When an addition needs to be taller:

Whenever possible, additions should not be taller than the historic building; however, when a taller addition is the only option, additions to single story structures may rise as high as 4' above the shadow line of the existing building at a distance of 40' from the front edge of the existing building.

In this instance, the side walls and roof of the addition must set in as is typical for all additions.

The portion of the roof that can be seen should have a hipped, side gable or clipped gable roof to help decrease the visual mass of the addition.

When an addition needs to be wider:

Rear additions that are wider than an existing historic building may be appropriate when the building is narrower than 30' or shifted to one side of the lot. In these instances, a structural alcove or channel must separate the existing building from the new addition. The structural alcove should sit in a minimum of 1' and be at least twice as long as it is deep.

In addition, a rear addition that is wider should not wrap the rear corner.

Ridge raises

Ridge raises are most appropriate for one-story, side-gable buildings, (without clipped gables) and that require more finished height in the attic. The purpose of a ridge raise is to allow for conditioned space in the attic and to discourage large rear or side additions. The raised portion must sit in a

minimum of 2' from each side wall and can be raised no more than 2' of total vertical height within the same plane as the front roof slope.

Sunrooms

Metal framed sunrooms, as a modern interpretation of early green houses, are appropriate if they are mostly glass or use appropriate cladding material for the district, are located at the rear in a minimally visible location, are minimally attached to the existing structure, and follow all other design guidelines for additions.

Foundation

Foundation walls should set in from the existing foundation at the back edge of the existing structure by one foot for each story or half story. Exception: When an addition is a small one-room deep (12' deep or less) addition that spans the width of the structure, and the existing structure is masonry with the addition to be wood (or appropriate substitute siding). The change in material from masonry to wood allows for a minimum of a four inch (4") inset.

Foundation height should match or be lower than the existing structure.

Foundation lines should be visually distinct from the predominant exterior wall material. This is generally accomplished with a change in materials.

Roof

The height of the addition's roof and eaves must be less than or equal to the existing structure.

Visually evident roof slopes should match the roof slopes of the existing structure, and roof planes should set in accordingly for rear additions.

Skylights should not be located on the front-facing slope of the roof. Skylights should be flat (no bubble lenses) with a low profile (no more than six inches tall) and only be installed behind the midpoint of the building).

Rear & Side Dormers

Dormer additions are appropriate for some historic buildings as they are a traditional way of adding ventilation and light to upper stories.

The addition of a dormer that would require the removal of historic features such as an existing dormer, chimneys, cupolas or decorative feature is not appropriate.

Rear dormers should be inset from the side walls of the building by a minimum of two feet. The top of a rear dormer may attach just below the ridge of the main roof or lower.

Side dormers should be compatible with the scale and design of the building. Generally, this can be accomplished with the following:

- New dormers should be similar in design and scale to an existing dormer on the building.*
- New dormers should be similar in design and scale to an existing dormer on another historic building that is similar in style and massing.*
- The number of dormers and their location and size should be appropriate to the style and design of the building. Sometimes dormer locations relate to the openings below. The symmetry or lack of symmetry within a building design should be used as a guide when placing dormers.*
- Dormers should not be added to secondary roof planes.*
- Eave depth on a dormer should not exceed the eave depth on the main roof.*
- The roof form of the dormer should match the roof form of the building or be appropriate for the style.*
- The roof pitch of the dormer should generally match the roof pitch of the building.*
- The ridge of a side dormer should be at least 2' below the ridge of the existing building; the cheeks should be inset at least 2' from the wall below or adjacent valley; and the front wall of the gable should setback a minimum of 2' from the wall below. (These minimum insets will likely be greater than 2' when following the guidelines for appropriate scale.)*
- Dormers should generally be fully glazed and aprons below the window should be minimal.*
- The exterior material cladding of side dormers should match the primary or secondary material of the main building.*

Side Additions

When a lot width exceeds 60' or the standard lot width on the block, it may be appropriate to add a side addition to a historic structure. The addition should set back from the face of the historic structure (at or beyond the midpoint of the building) and should be subservient in height, width and massing to the historic structure.

Side additions should be narrower than half of the historic building width and exhibit a height of at least 2' shorter than the historic building.

To deemphasize a side addition, the roofing form should generally be a hip or side-gable roof form.

- b. The creation of an addition through enclosure of a front porch is not appropriate.

The addition should set back from the face of the historic structure (at or beyond the midpoint of the building) and should be subservient in height, width and massing to the historic structure.

Side additions should be narrower than half of the historic building width and exhibit a height of at least 2' shorter than the historic building.

To deemphasize a side addition, the roofing form should generally be a hip or side-gable roof form.

- c. Contemporary designs for additions to existing properties are not discouraged when such additions do not destroy significant historical, architectural, or cultural material; and when such design is compatible, by not contrasting greatly, with the size, scale, color, material, and character of the property, neighborhood, or environment.

Side porch additions may be appropriate for corner building lots or lots more than 60' wide.

- d. A new addition should be constructed in such a manner that if the addition were to be removed in the future, the essential form and integrity of the original structure would be unimpaired.

- e. Additions should follow the guidelines for new construction.

Connections should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

III.B.1 Demolition is Not Appropriate

- a. if a building, or major portion of a building, is of such architectural or historical interest and value that its removal would be detrimental to the public interest; or
- b. if a building, or major portion of a building, is of such old or unusual or uncommon design and materials that it could not be reproduced or be reproduced without great difficulty and expense.

III.B.2 Demolition is Appropriate

- a. if a building, or major portion of a building, has irretrievably lost its architectural and historical integrity and significance and its removal will result in a more historically appropriate visual effect on the district;
- b. if a building, or major portion of a building, does not contribute to the historical and architectural character and significance of the district and its removal will result in a more historically appropriate visual effect on the district; or
- c. if the denial of the demolition will result in an economic hardship on the applicant as determined by the MHZC in accordance with section 17.40.420 of the historic zoning ordinance.

IV.B. Relocation

1. Moving a building into the district is appropriate if the building will be compatible with the historic buildings surrounding the new location in terms of height, scale, setback and rhythm of spacing, materials, texture, details, material color, roof shape, orientation, and proportion and rhythm of openings.
2. Moving a building out of the district is not appropriate unless:
 - a. the building does not contribute to the district's historical and architectural significance, or has irretrievably lost its architectural and historical integrity; or

- b. if historic, the loss of its architectural and historical integrity in its original location is certain.
- 3. Moving a building from one location to another within the district is not appropriate unless:
 - a. the building will be compatible with the historic buildings surrounding the new location in terms of height, scale, setback and rhythm of spacing, materials, texture, details, material color, roof shape, orientation, and proportion and rhythm of openings; and
 - b. if historic, the loss of its architectural and historical integrity in its original location is certain.



Figure 1: 1300 Princeton Avenue

Background: The house at 3800 Princeton Avenue was constructed c. 1930 and contributes to the Richland-West End Neighborhood Conservation Zoning Overlay.

Analysis and Findings:

Demolition: Partial demolition will occur on the rear elevation of the structure, including removing a portion of the back slope of the side gabled roof, to allow for the addition to tie into the existing roof (Figure 2) and removal of the rear deck. Staff finds that this partial demolition is appropriate because this portion of the house is not visible from the public right of way and does not contribute to the historic or architectural character of the building.



Figure 2: Rear elevation

Further partial demolition will occur on the east elevation, where a small section of wall will be removed to add a window (Figures 3 and 4). Staff finds that this fenestration change is also appropriate as it is located beyond the midpoint of the historic house and the new window will match the design and dimensions of existing windows.



Figure 3: East elevation – window to be added at location indicated.

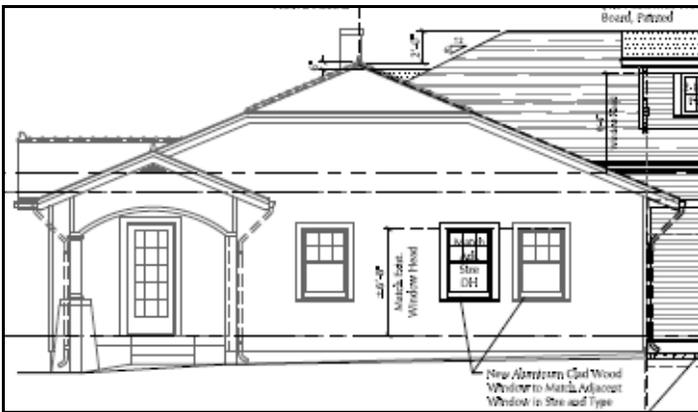


Figure 4: East elevation with proposed window

The proposed partial demolition meets Section III.B.2 for appropriate demolition and does not meet section III.B.1 for inappropriate demolition.

Height & Scale: The proposed addition is narrower than the historic house. On the west side the addition is inset by two feet (2') as per the guidelines, and on the east side, it is inset about nine feet, six inches (9'6").

The historic house is about thirty-six feet (36') deep, and the addition will add about forty-two feet (42') of increased depth. While the increased depth is significant, staff finds that the overall depth could be appropriate, as the house itself is shallow when compared to the historic context. Also, approximately ten feet (10') of the depth is comprised of a semi-open screened porch.

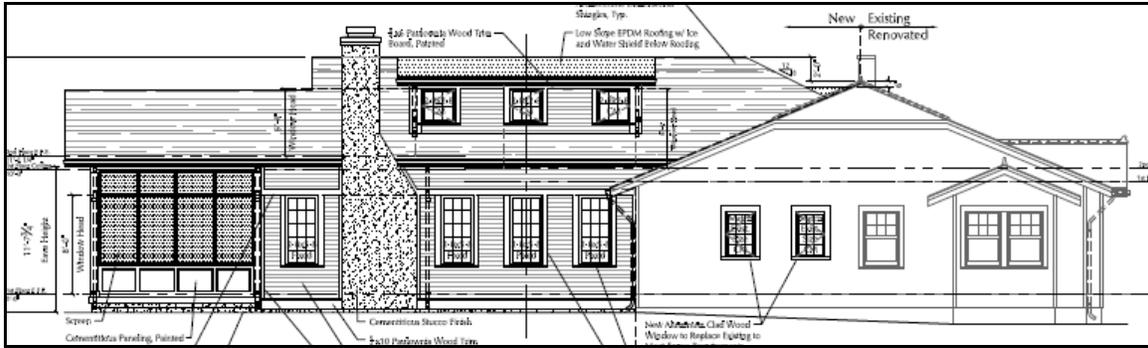


Figure 5: West elevation

The historic house has a side gabled roof, with a ridge approximately seventeen feet (17') above the finished floor height. The addition hips from the existing roof, and steps two feet (2') higher. The Commission has approved such roof forms in the past, finding that where a ridge raise is not possible (in this case, that is due to the clipped eaves), this type of roof is an acceptable solution. The guidelines suggest that such a height increase should only be allowed forty feet (40') back from the front wall of the house, and in this instance the height increase occurs at about thirty-two feet (32') back. Staff finds that to be appropriate in this instance, as the historic house itself is only about thirty-six feet (36') deep. The project meets section II.B.1.a. and b.

Location & Removability: The location of the addition at the rear of the existing building is in accordance with the design guidelines. The addition's inset and separate roof form help to distinguish it from the historic house and read as an addition to the house. At the same time, its materials, roof form, and fenestration pattern are all compatible with the historic character of the existing house. The addition is designed so that if the addition were to be removed in the future, the historic character of the house would still be intact. The project meets section II.B.2.a and d.

Design: The design of the proposed addition is differentiated from the historic house, while also compatible. The addition is distinguished from the historic portion by being narrower than the historic house, having a separate roof form and having the appropriate insets. The materials, height, massing, proportion of openings and scale are all appropriate.

The historic house has a side gabled roof with clipped eaves and clay ridge tiles. The roof form of the proposed addition leaves this primary roof form intact. Staff would request that the ridge tiles be retained, as they are a character-defining feature of the house. The project meets section II.B.2.a and e.

Setback & Rhythm of Spacing: The rear addition will not impact the front setback of the house. The project meets section II.B.1.c.

Materials:

	Proposed	Color/Texture/ Make/Manufacturer	Approved Previously or Typical of Neighborhood	Requires Additional Review
Foundation	Concrete Block	Split Face	Yes	
Cladding	cementitious lap siding	Smooth, exposure to match existing	Yes	
Roofing	Architectural Shingles	Color unknown	Yes	X
Secondary Roofing	EPDM Roofing	Low slope (dormer roofs)	Yes	
Trim	Wood	Smooth faced, dimensions to match existing	Yes	
Side steps	Not indicated	Unknown	Unknown	X
Chimney	Cementitious Stucco	Color unknown	Yes	
Rear Porch Posts	Wood	Smooth	Yes	
Rear Porch Wall	Cementitious paneling	Smooth	Yes	
Windows	Aluminum clad	Needs final approval	Yes	X
Side/rear doors	Unknown	Needs final approval	Yes	X

With final staff approval of the roofing color, the side step material, the windows and the doors, staff finds that the project meets section II.B.1.d

Roof form: The historic house has a side-gabled clipped roof form with a 5/12 slope. The proposed addition has a rear gabled roof form that hips into the back of the side gabled roof. The rear gable has a 6/12 slope. The dormers on either side have a 1.5/12 slope. The new roof is two feet (2') higher than the historic roof, as noted above. Staff finds that the roof form and slope of the addition are compatible with the historic house.

The project meets section II.B.1.e.

Orientation: The rear addition will not impact the orientation of the house toward Princeton Avenue. The project meets section II.B.1.f.

Proportion and Rhythm of Openings: No changes to the window and door openings on the existing house were indicated on the plans, beyond the window being added to the east elevation, as discussed under “demolition.” The majority of the windows on the

ground floor of the proposed addition are generally twice as tall as they are wide, thereby meeting the historic proportions of openings. On the east elevation, smaller square windows flank the side door, staff finds these to be appropriate as they are beyond the midpoint of the house and are accent windows. Smaller square windows are also found in the dormers. Staff finds these to be appropriate as this type of smaller window is typical of dormers in historic houses. There are no large expanses of wall space without a window or door opening. Staff finds the project's proportion and rhythm of openings to meet Section II.B.1.g.


Appurtenances & Utilities: No changes to the site's appurtenances were indicated on the drawings. The location of the HVAC and other utilities was also not noted. Staff asks that the HVAC be located on the rear façade, or on a side façade beyond the midpoint of the house. The project meets section II.B.1.i.

Recommendation:

Staff recommends approval of the proposed addition with the following conditions:

1. Staff approve the roofing color, the side step material, the windows and the doors, prior to purchase and installation;
2. The clay ridge tiles shall be retained; and,
3. The HVAC shall be located behind the house or on either side, beyond the midpoint of the house;

finding that the project meets II.B of the Richland-West End Neighborhood Conservation Zoning District: Handbook and Design Guidelines.

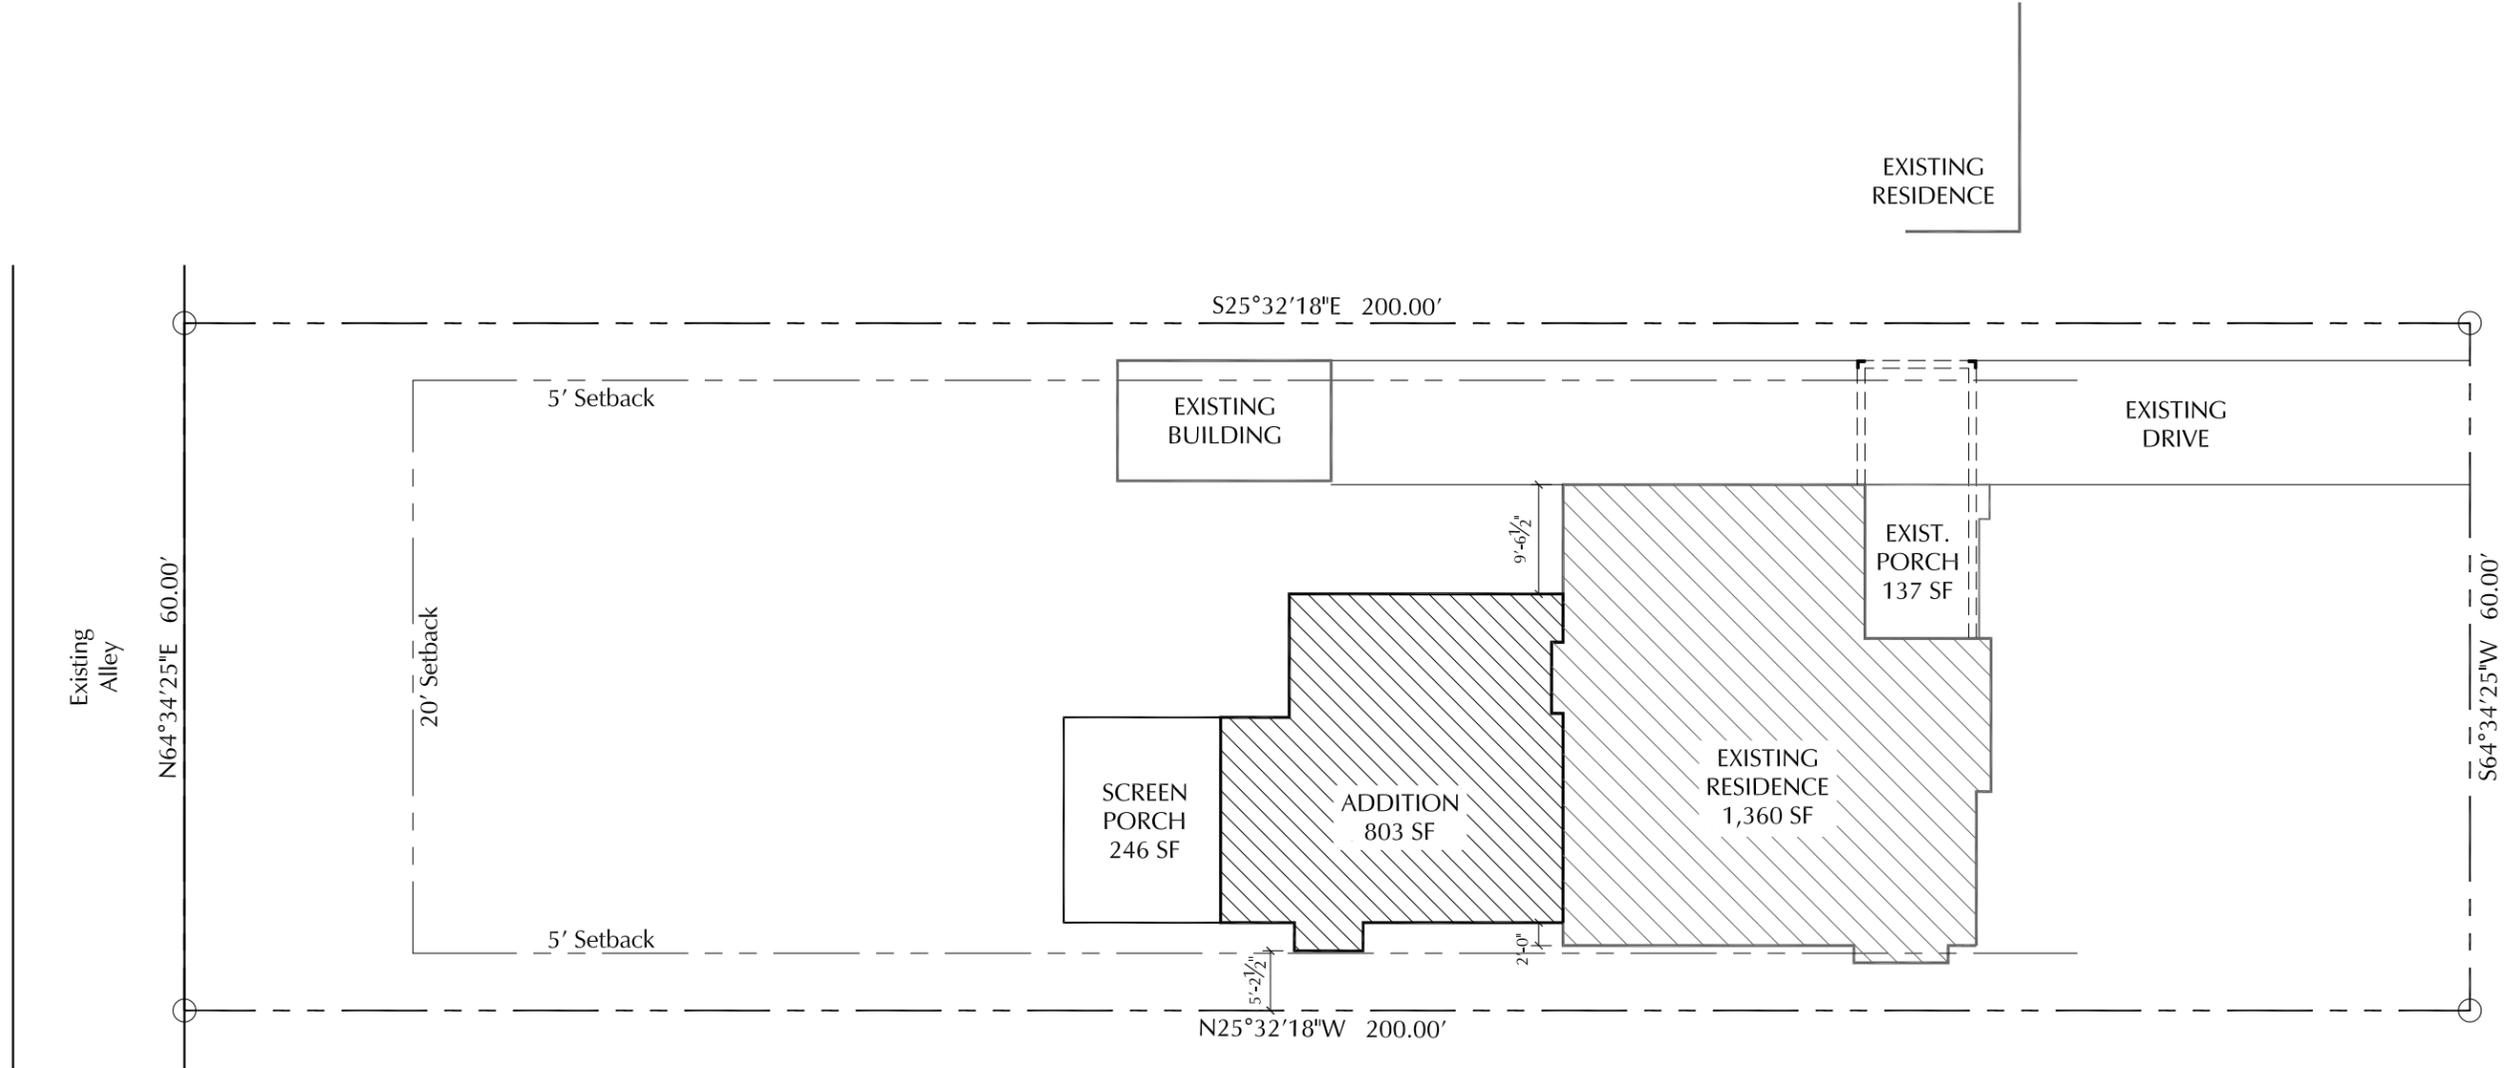


EXISTING
RESIDENCE

EXISTING
RESIDENCE



1

Site Layout Plan




Scale: 1/16"=1'-0"

ALLARD WARD
ARCHITECTS
1618 Sixteenth Avenue South
Nashville, Tennessee 37212
allardward.com
Tel: 615.345.1010
Fax: 615.345.1011

Drawings:
Site Layout Plan
Date:
08.21.18

AS1.0

Additions and Renovations to:
The Evans Residence
3800 Princeton Ave
Nashville, Tennessee 37205

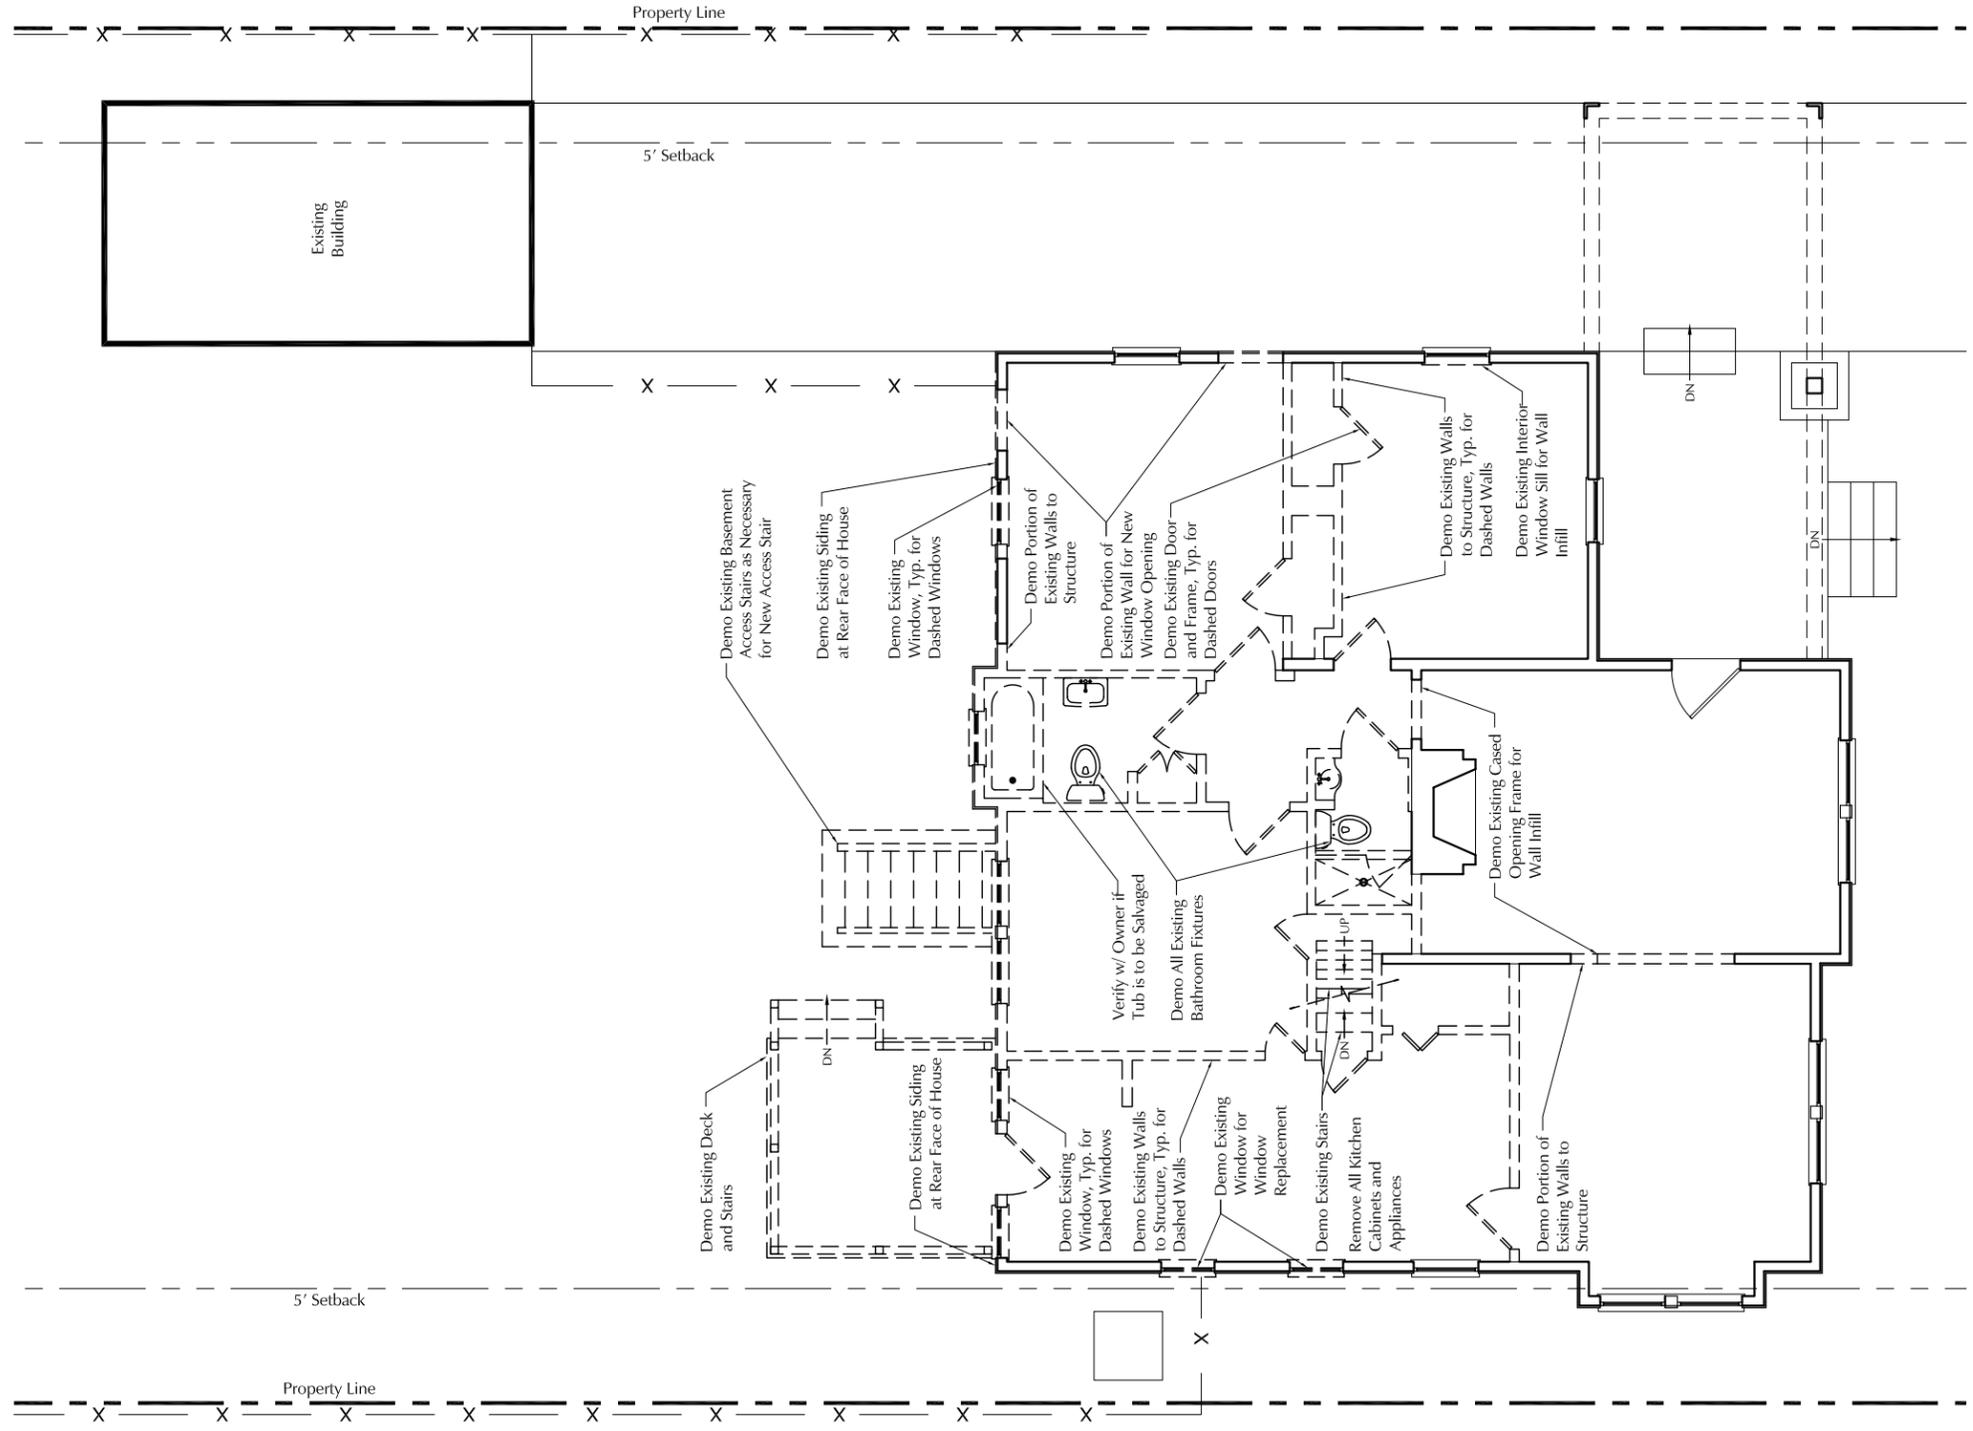

1

Scale: 1/8"=1'-0"


First Floor Demolition Plan

Drawings:
Demolition Plan
Date:
08.21.18

ALLARD WARD ARCHITECTS
 1618 Sixteenth Avenue South
 Nashville, Tennessee 37212
 Tel: 615.345.1010
 Fax: 615.345.1011
 allardward.com


Additions and Renovations to:
The Evans Residence
 3800 Princeton Ave
 Nashville, Tennessee 37205

D1.0

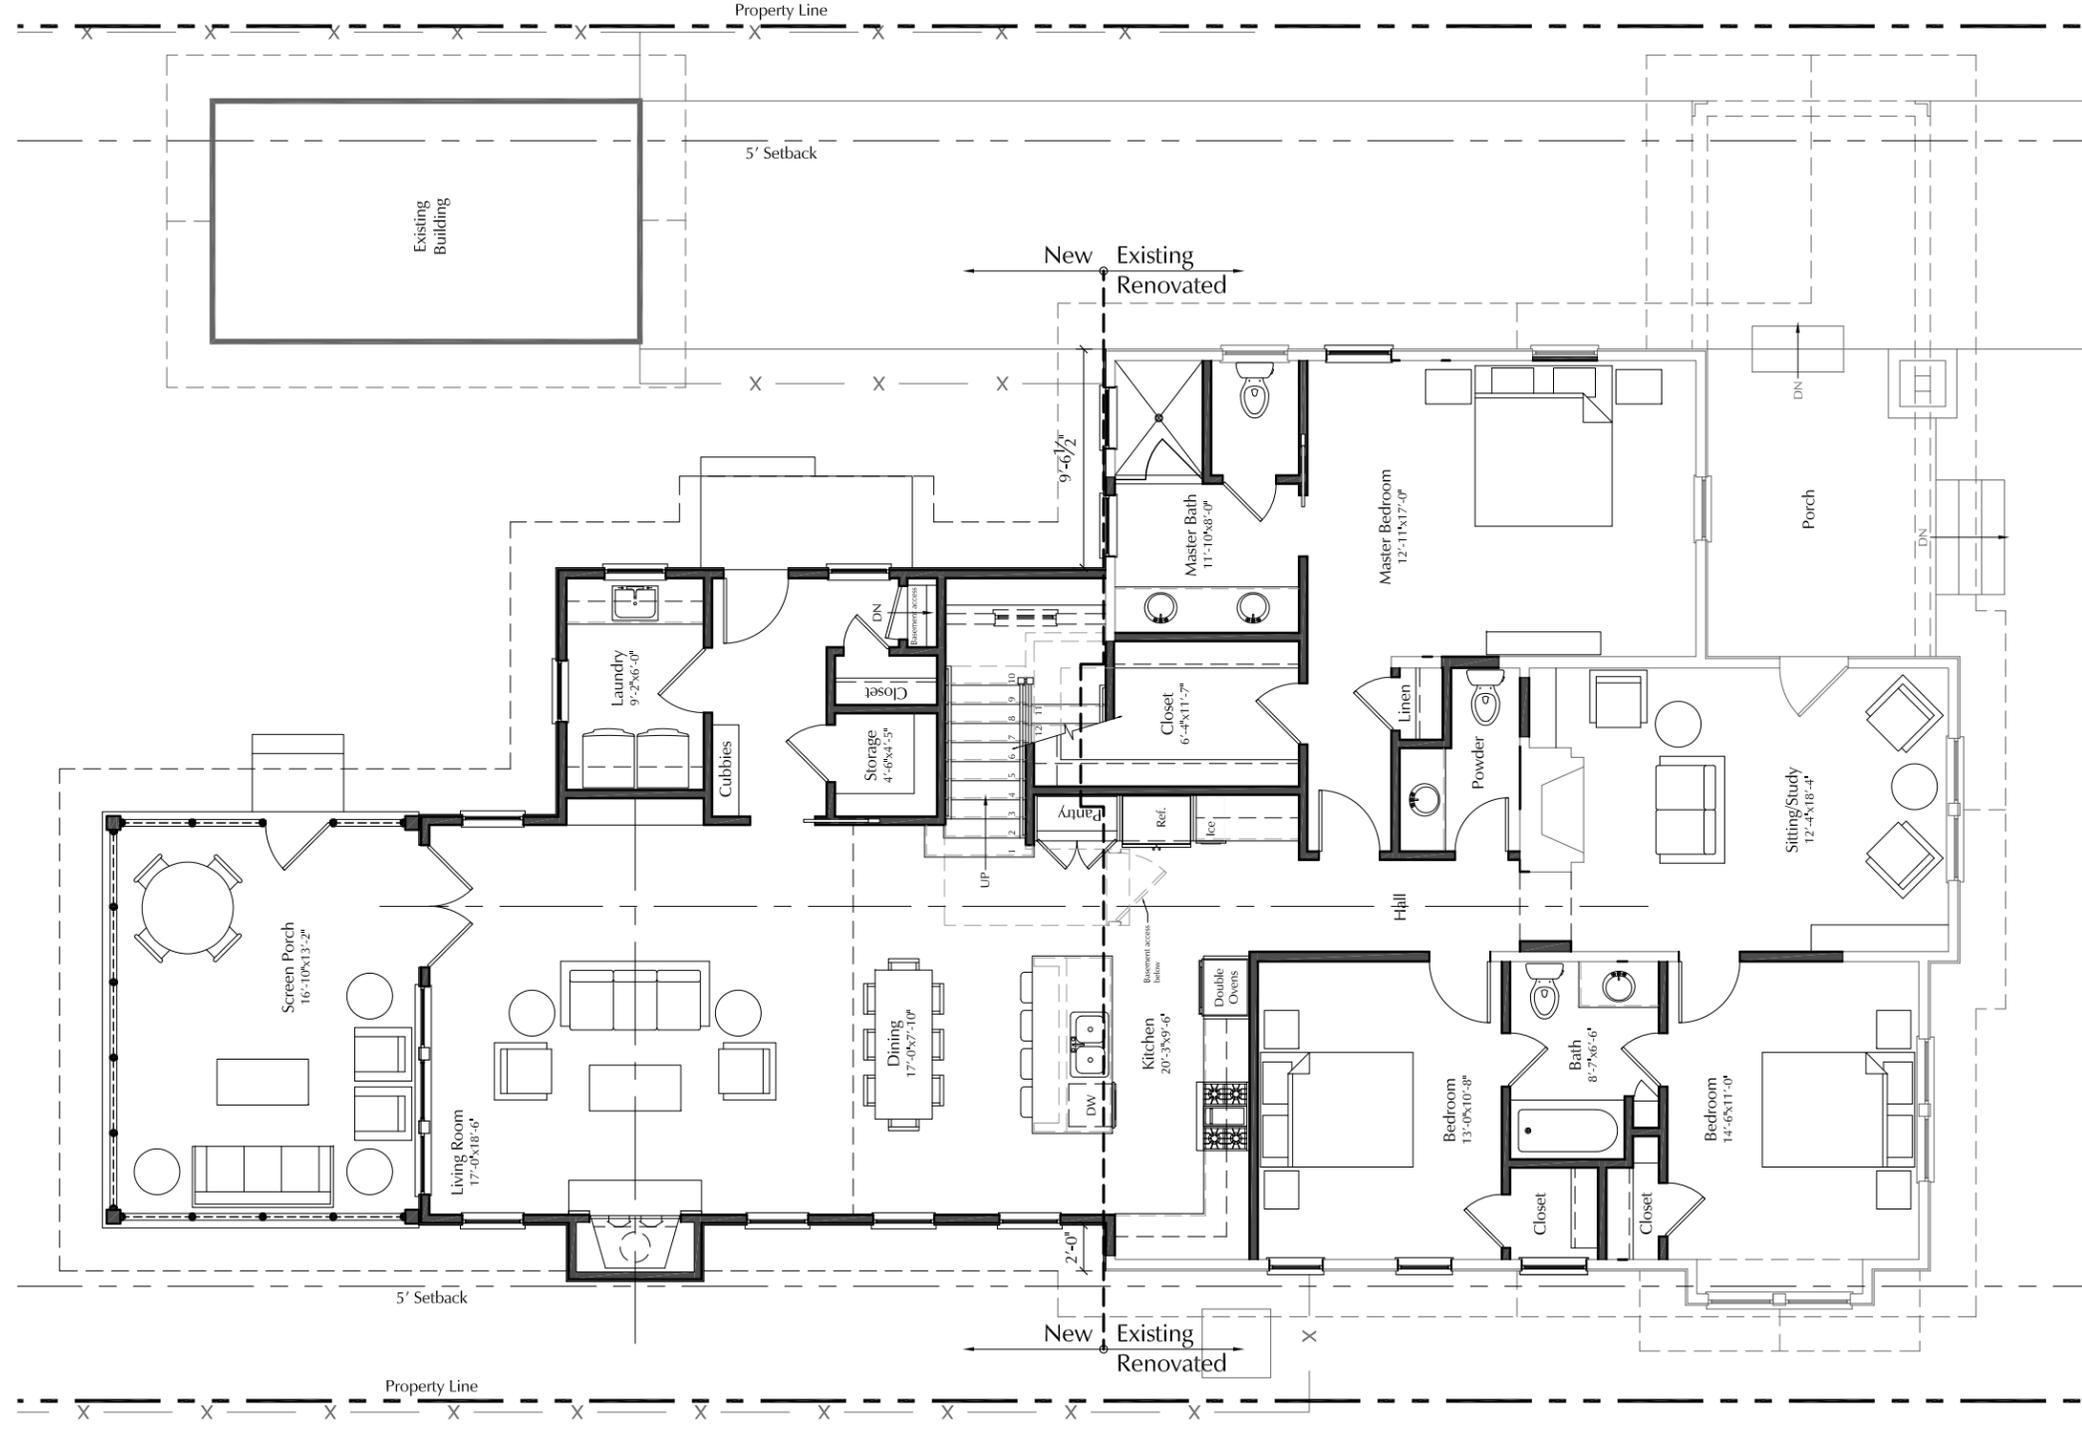

1

First Floor Plan




Scale: 1/8"=1'-0"

Drawings:
First Floor Plan
Date:
08.21.18

ALLARD WARD
ARCHITECTS
1618 Sixteenth Avenue South
Nashville, Tennessee 37212
allardward.com
Tel: 615.345.1010
Fax: 615.345.1011

Additions and Renovations to:
The Evans Residence
3800 Princeton Ave
Nashville, Tennessee 37205

A1.0

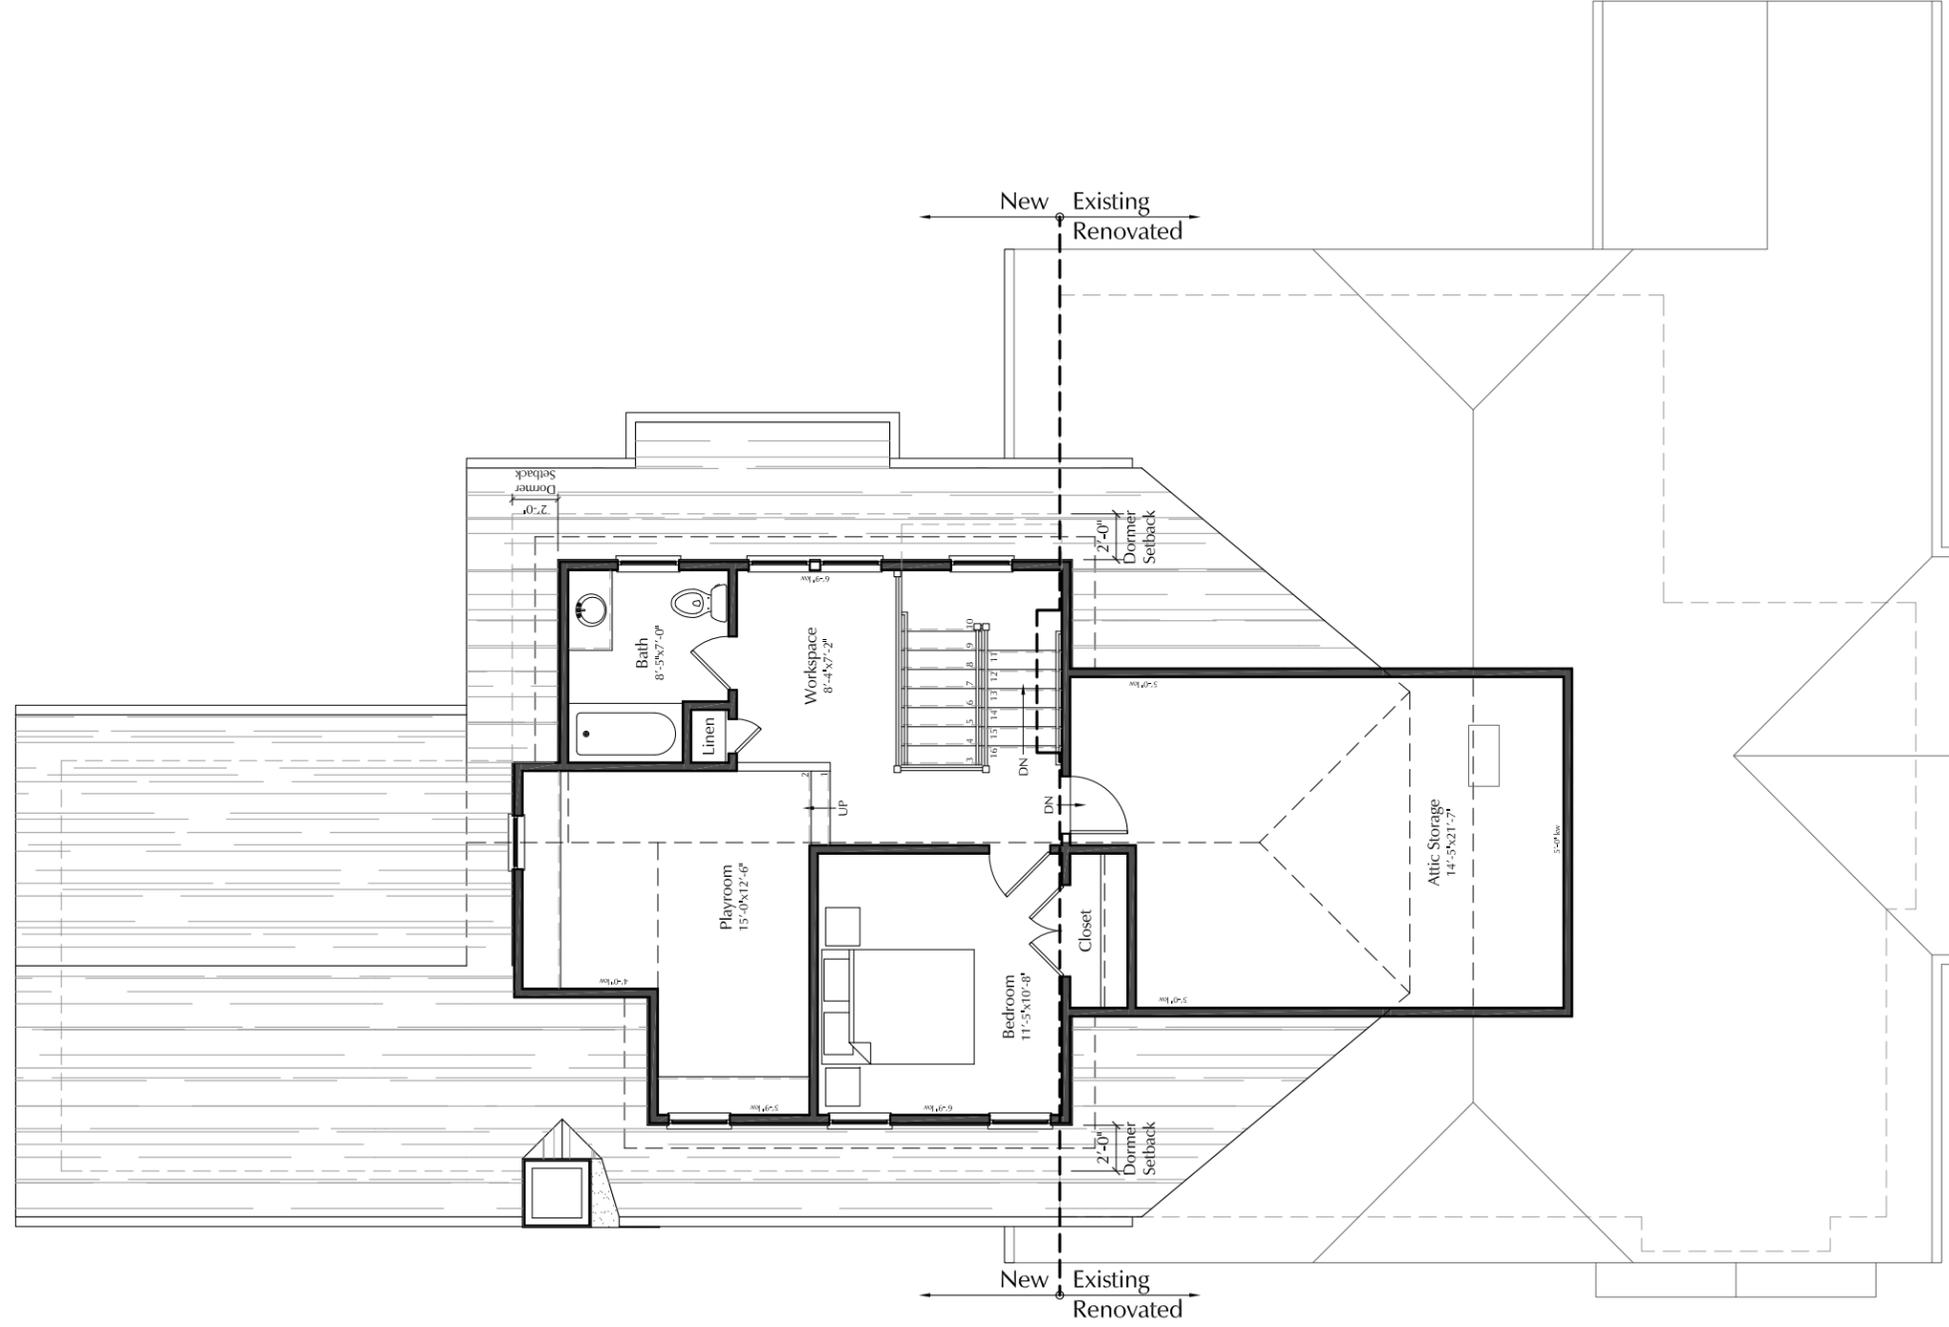

1

Second Floor Plan




Scale: 1/8"=1'-0"

Drawings:
Second Floor Plan
Date:
08.21.18

ALLARD WARD
ARCHITECTS
1618 Sixteenth Avenue South
Nashville, Tennessee 37212
allardward.com
Tel: 615.345.1010
Fax: 615.345.1011


Additions and Renovations to:
The Evans Residence
3800 Princeton Ave
Nashville, Tennessee 37205

A1.1

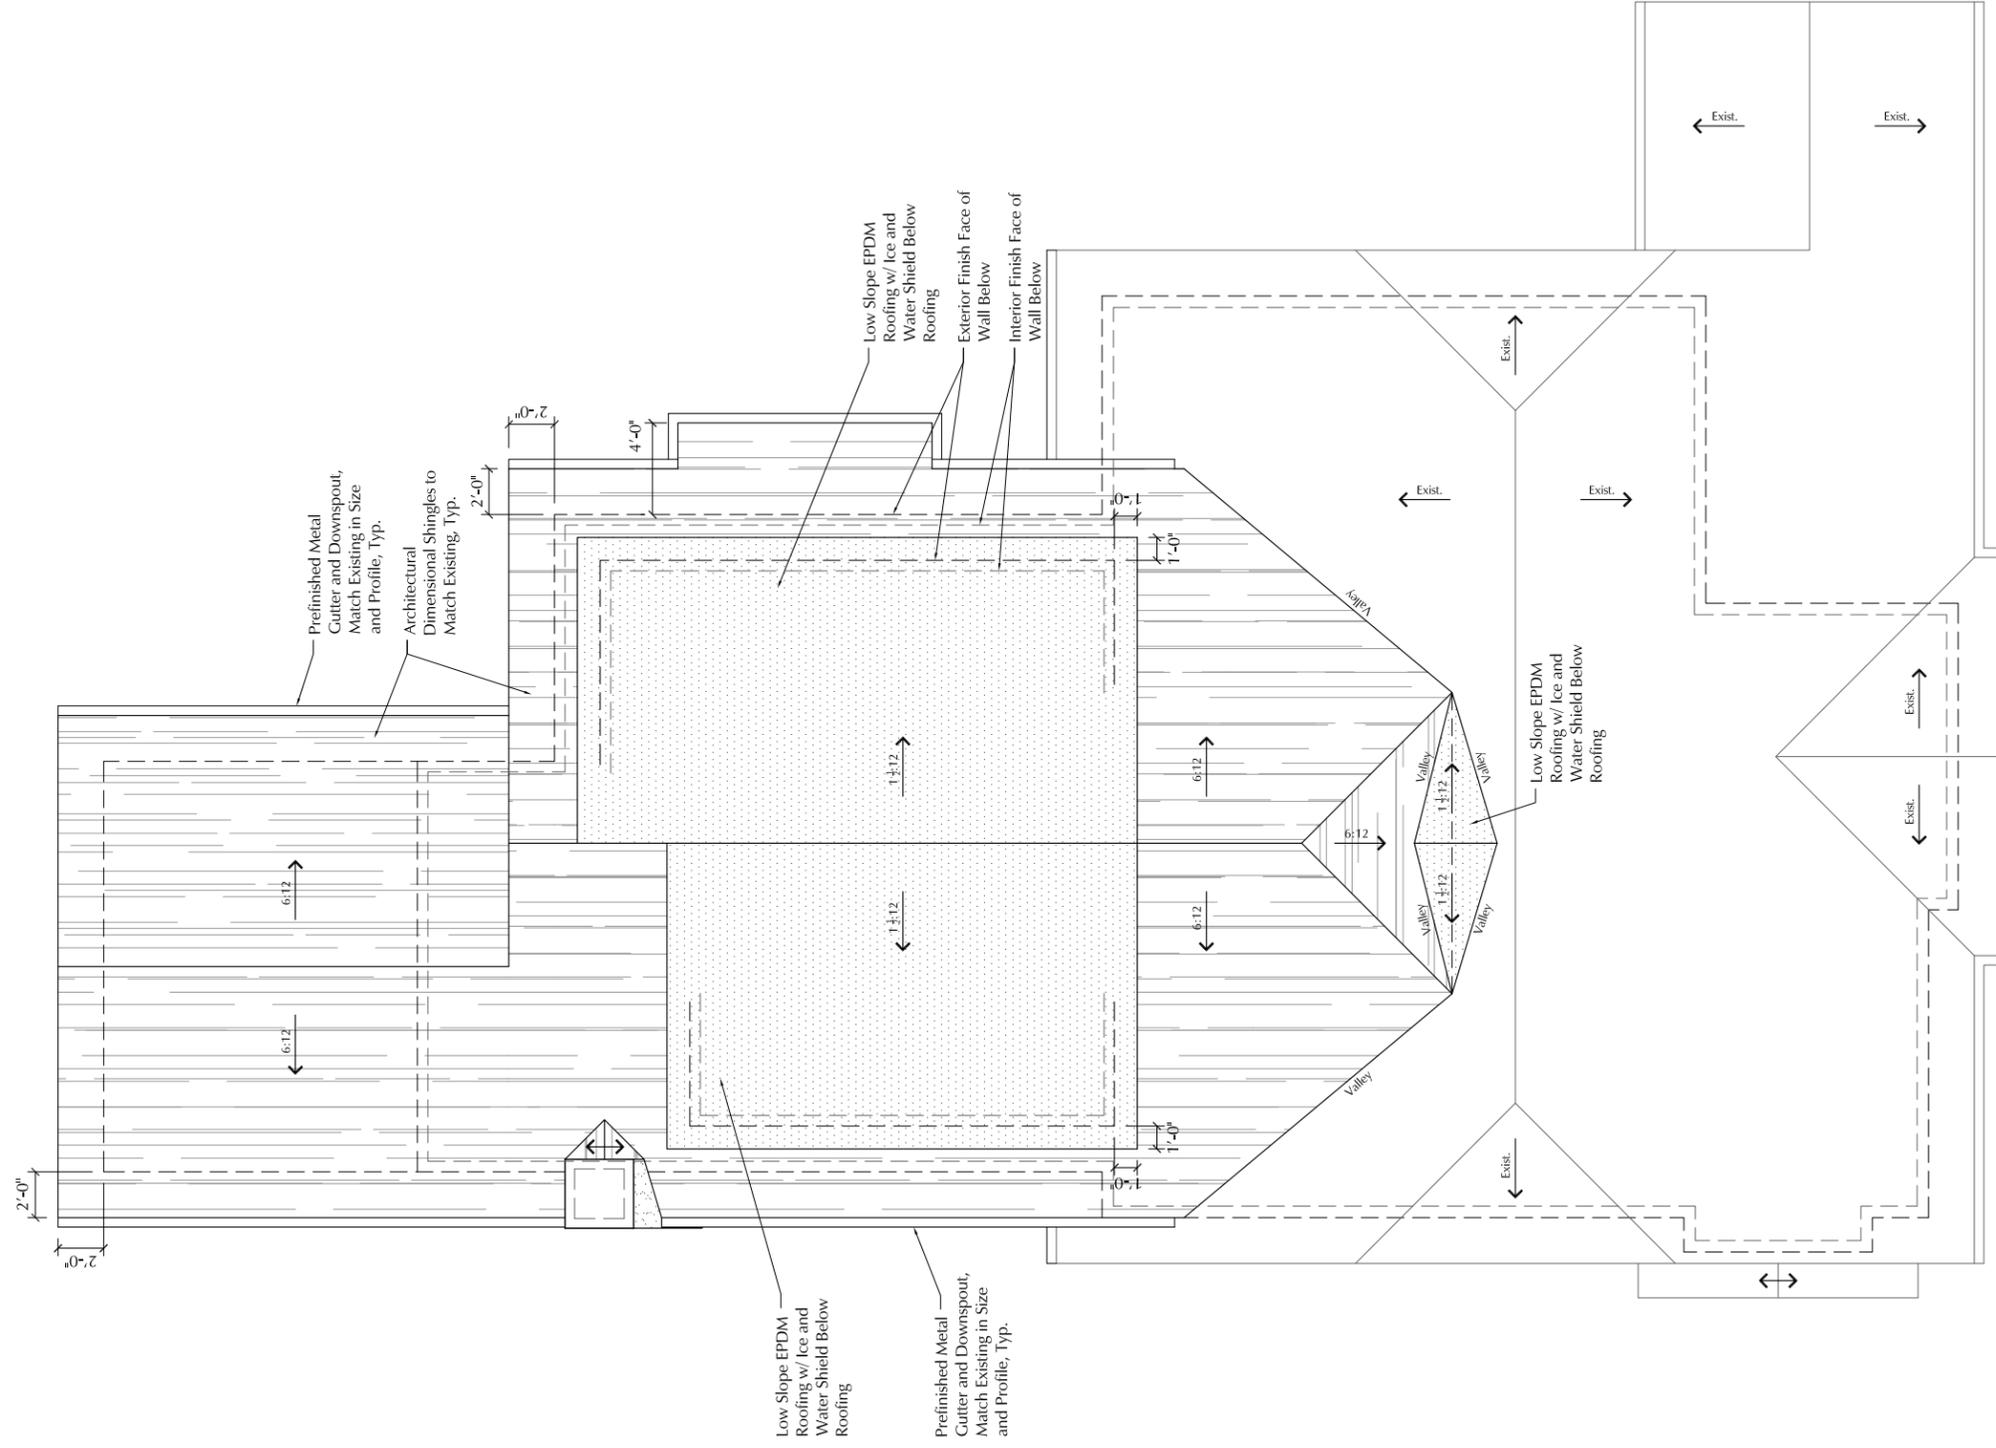

1

Roof Plan




Scale: 1/8"=1'-0"

Drawings:
Roof Plan
Date:
08.21.18


ALLARD WARD
ARCHITECTS
1618 Sixteenth Avenue South
Nashville, Tennessee 37212
allardward.com
Tel: 615.345.1010
Fax: 615.345.1011

Additions and Renovations to:
The Evans Residence
3800 Princeton Ave
Nashville, Tennessee 37205

A1.2

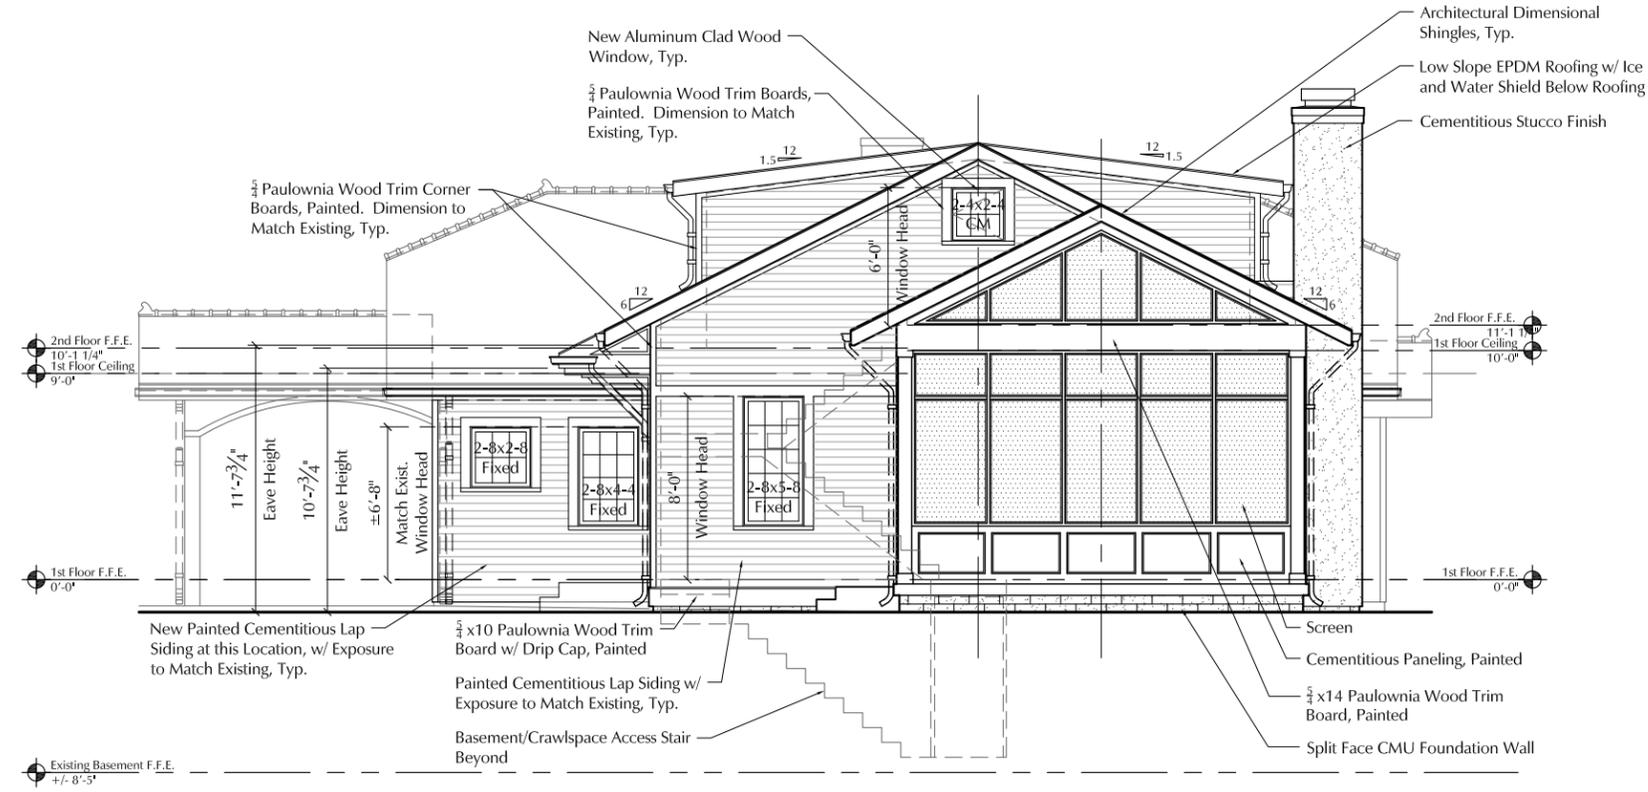

2 Rear Elevation
 Scale: 1/8"=1'-0"

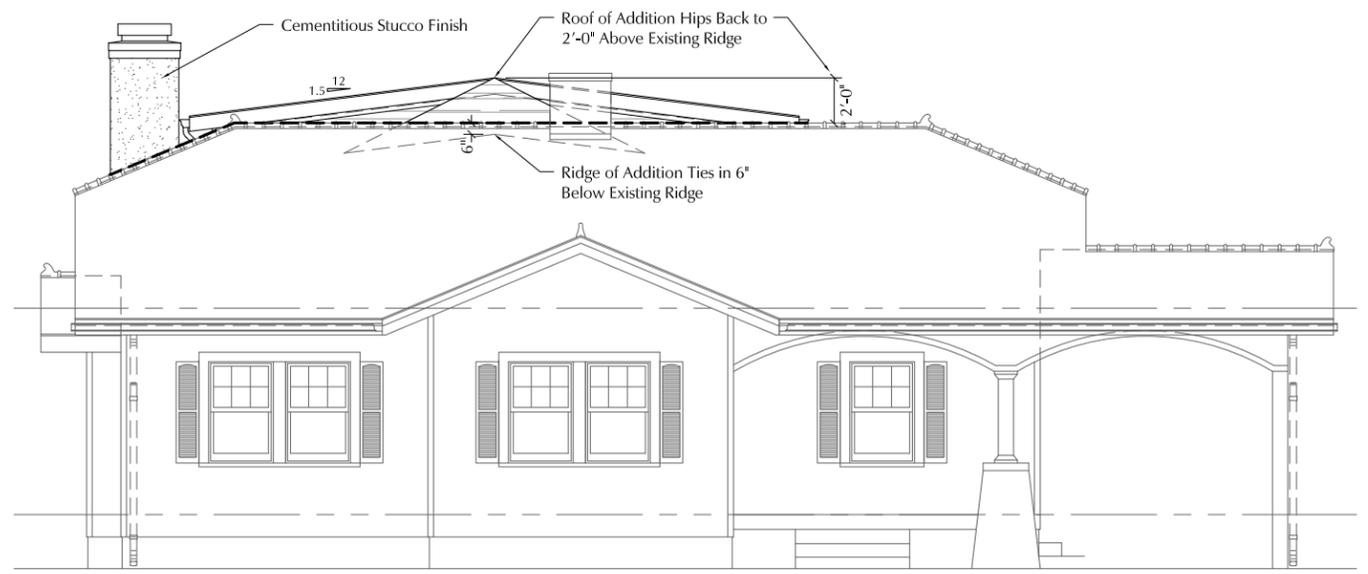

1 Front Elevation
 Scale: 1/8"=1'-0"

Additions and Renovations to:
The Evans Residence
 3800 Princeton Ave
 Nashville, Tennessee 37205

ALLARD WARD ARCHITECTS
 ALLARD WARD ARCHITECTS
 1618 Sixteenth Avenue South
 Nashville, Tennessee 37212
 allardward.com
 Tel: 615.345.1010
 Fax: 615.345.1011

Drawings:
 Elevations
 Date:
 08.21.18

