



METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY

Metropolitan Historic Zoning Commission
Sunnyside in Sevier Park
3000 Granny White Pike
Nashville, Tennessee 37204
Telephone: (615) 862-7970
Fax: (615) 862-7974

STAFF RECOMMENDATION
1905 Fatherland Street
February 18, 2015

Application: New construction-addition
District: Lockeland Springs-East End Neighborhood Conservation Zoning Overlay
Council District: 06
Map and Parcel Number: 08314017100
Applicant: John Teselle, architect
Project Lead: Paul Hoffman, paul.hoffman@nashville.gov

<p>Description of Project: Construction of a rear addition to this contributing home.</p> <p>Recommendation Summary: Staff recommends approval with the conditions:</p> <ol style="list-style-type: none"> 1. Staff approve the final details, dimensions and materials of windows and doors prior to purchase and installation; and, 2. Staff approve the roof color and masonry color, dimensions and texture; 3. If HVAC and utilities are to be moved, that they be on the rear façade, or on a side façade beyond the midpoint of the house. <p>Meeting these conditions, Staff finds the project meets the design guidelines for the Lockeland Springs-East End Neighborhood Conservation Zoning Overlay.</p>	<p>Attachments A: Photographs B: Site Plan C: Elevations</p>
--	--

Applicable Design Guidelines:

II.B. New Construction

1. Height

New buildings must be constructed to the same number of stories and to a height which is compatible with the height of adjacent buildings.

The height of the foundation wall, porch roof, and main roofs should all be compatible with those of surrounding historic buildings.

2. Scale

The size of a new building and its mass in relation to open spaces; and its windows, doors, openings, and porches should be visually compatible with surrounding historic buildings.

Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.

3. Setback and Rhythm of Spacing

4. Since construction in an historic district has usually taken place continuously from the late nineteenth and early twentieth centuries, a variety of building types and styles result which demonstrate the changes in building tastes and technology over the years. New buildings should continue this tradition while complementing and being compatible with other buildings in the area.

In Lockeland Springs-East End, historic buildings were constructed between 1880 and 1950. New buildings should be compatible with surrounding houses from this period.

5. Reconstruction may be appropriate when it reproduces facades of a building which no longer exists and which was located in the historic district if: (1) the building would have contributed to the historical and architectural character of the area; (2) if it will be compatible in terms of style, height, scale, massing, and materials with the buildings immediately surrounding the lot on which the reproduction will be built; and (3) if it is accurately based on pictorial documentation.
6. Because new buildings usually relate to an established pattern and rhythm of existing buildings, both on the same and opposite sides of a street, the dominance of that pattern and rhythm must be respected and not disrupted.
7. New construction should be consistent with existing buildings along a street in terms of height, scale, setback, and rhythm; relationship of materials, texture, details, and color; roof shape; orientation; and proportion and rhythm of openings.

The setback from front and side yard property lines established by adjacent historic buildings must be maintained. When a definite rhythm along a street is established by uniform lot and building width, infill new buildings should maintain that rhythm.

The Commission has the ability to reduce building setbacks and extend height limitations of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. 17.40.410).

Appropriate setback reductions will be determined based on:

- *The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;*
- *Setbacks of like structures historically found on the site as determined by historic maps, site plans or*

- photographs;*
- Shape of lot;*
- Alley access or lack thereof;*
- Proximity of adjoining structures; and*
- Property lines.*

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity*
- Existing or planned slope and grade*

Infill construction on the 1400 - 1600 blocks of Boscobel Street may have widths up to 40'.

4. Relationship of Materials, Textures, Details, and Material Colors

The relationship and use of materials, textures, details, and material color of a new building's public facades shall be visually compatible with and similar to those of adjacent buildings, or shall not contrast conspicuously.

T-1-11- type building panels, "permastone", E.F.I.S. and other artificial siding materials are generally not appropriate. However, pre-cast stone and cement fiberboard siding are approvable cladding materials for new construction; but pre-cast stone should be of a compatible color and texture to existing historic stone clad structures in the district; and cement fiberboard siding, when used for lapped siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal.

Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").

Four inch (4") nominal corner boards are required at the face of each exposed corner.

Stud wall lumber and embossed wood grain are prohibited.

Belt courses or a change in materials from one story to another are often encouraged for large two-story buildings to break up the massing.

When different materials are used, it is most appropriate to have the change happen at floor lines.

Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate.

Texture and tooling of mortar on new construction should be similar to historic examples.

Asphalt shingle is an appropriate roof material for most buildings. Generally, roofing should not have strong simulated shadows in the granule colors which results in a rough, pitted appearance; faux shadow lines; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof.

Primary entrances should be 1/2 to full-light doors. Faux leaded glass is inappropriate.

Generally front doors should be 1/2 to full-light. Faux leaded glass is inappropriate.

5. Roof Shape

The roofs of new buildings shall be visually compatible, by not contrasting greatly, with the roof shape and orientation of surrounding buildings.

Roof pitches should be similar to the pitches found in the district. Historic roofs are generally between 6/12 and 12/12.

Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range.

Generally, two-story residential buildings have hipped roofs.

Generally, dormers should be located on the roof. Wall dormers are not typical in the historic context and accentuate height so they should be used minimally and generally only on secondary facades. When they are appropriate they should be no wider than the typical window openings and should not project beyond the main wall.

Infill construction on the 1400 -1600 blocks of Boscobel Street may have flat roofs or roofs with a minimal slope.

6. Orientation

The site orientation of new buildings shall be consistent with that of adjacent buildings and shall be visually compatible. Directional expression shall be compatible with surrounding buildings, whether that expression is vertical, horizontal, or non-directional.

Porches

New buildings should incorporate at least one front street-related porch that is accessible from the front street.

Side porches or porte cocheres may also be appropriate as a secondary entrance, but the primary entrance should address the front.

Front porches generally should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals.

Parking areas and Driveways

Generally, curb cuts should not be added.

Where a new driveway is appropriate it should be two concrete strips with a central grassy median.

Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

Duplexes

Infill duplexes shall have one or two doors facing the street, as seen on historic duplexes. In the case of corner lots, an entrance facing the side street is possible as long as it is designed to look like a secondary entrance.

In the case of duplexes, vehicular access for both units should be from the alley, where an alley exists. A new shared curb cut may be added, if no alley and no driveway exists, but the driveway should be no more than 12' wide from the street to the rear of the home. Driveways should use concrete strips where they are typical of the historic context. Front yard parking or driveways which end at the front of the house are not consistent with the character of the historic neighborhoods.

7. Proportion and Rhythm of Openings

The relationship of width to height of windows and doors, and the rhythm of solids (*walls*) to voids (*door and window openings*) in a new building shall be compatible, by not contrasting greatly, with surrounding *historic* buildings.

Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district.

In most cases, every 8-13 horizontal feet of flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

Double-hung windows should exhibit a height to width ratio of at least 2:1.

Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.

Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings.

Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.

Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

9. Appurtenances

Appurtenances related to new buildings, including driveways, sidewalks, lighting, fences, and walls, shall be visually compatible with the environment of the existing buildings and sites to which they relate.

Utilities

Utility connections such as gas meters, electric meters, phone, cable, and HVAC condenser units should be located so as to minimize their visibility from the street.

Generally, utility connections should be placed no closer to the street than the mid point of the structure.

Power lines should be placed underground if they are carried from the street and not from the rear or an alley.

2. ADDITIONS

- a. Generally, an addition should be situated at the rear of a building in such a way that it will not disturb either front or side facades.

Placement

Additions should be located at the rear of an existing structure.

Connections to additions should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

Generally, one-story rear additions should inset one foot, for each story, from the side wall.

Additions should be physically distinguished from the historic building and generally fit within the shadow line of the existing building.

Additions that tie-into the existing roof must be at least 6" below the existing ridge line.

In order to assure that an addition has achieved proper scale, the addition should:

- No matter its use, an addition should not be larger than the existing house, not including non-historic additions, in order to achieve compatibility in scale. This will allow for the retention of small and medium size homes in the neighborhood. The diversity of housing type and size is a character defining feature of the historic districts.*
- Additions which are essentially a house-behind-a-house with a long narrow connector are not appropriate, as the form does not exist historically. Short or minimal connections that do not require the removal of the entire back wall of a historic building are preferred.*
- Additions should generally be shorter and thinner than the existing building. Exceptions may be made when unusual constraints make these parameters unreasonable, such as:*

- An extreme grade change*
- Atypical lot parcel shape or size*

In these cases, an addition may rise above or extend wider than the existing building; however, generally the addition should not be taller and extend wider.

When an addition needs to be taller:

Whenever possible, additions should not be taller than the historic building; however, when a taller addition is the only option, additions to single story structures may rise as high as 4' above the shadow line of the existing building at a distance of 40' from the front edge of the existing building. In this instance, the side walls and roof of the addition must set in as is typical for all additions. The portion of the roof that can be seen should have a hipped, side gable or clipped gable roof to help decrease the visual mass of the addition.

When an addition needs to be wider:

Rear additions that are wider than an existing historic building may be appropriate when the building is narrower than 30' or shifted to one side of the lot. In these instances, a structural alcove or channel must separate the existing building from the new addition. The structural alcove should sit in a minimum of 1' and be at least twice as long as it is deep.

In addition, a rear addition that is wider should not wrap the rear corner.

Ridge raises

Ridge raises are most appropriate for one-story, side-gable buildings, (without clipped gables) and that

require more finished height in the attic. The purpose of a ridge raise is to allow for conditioned space in the attic and to discourage large rear or side additions. The raised portion must sit in a minimum of 2' from each side wall and can be raised no more than 2' of total vertical height within the same plane as the front roof slope.

Sunrooms

Metal framed sunrooms, as a modern interpretation of early green houses, are appropriate if they are mostly glass or use appropriate cladding material for the district, are located at the rear in a minimally visible location, are minimally attached to the existing structure, and follow all other design guidelines for additions.

Foundation

Foundation walls should set in from the existing foundation at the back edge of the existing structure by one foot for each story or half story. Exception: When an addition is a small one-room deep (12' deep or less) addition that spans the width of the structure, and the existing structure is masonry with the addition to be wood (or appropriate substitute siding). The change in material from masonry to wood allows for a minimum of a four inch (4") inset.

Foundation height should match or be lower than the existing structure.

Foundation lines should be visually distinct from the predominant exterior wall material. This is generally accomplished with a change in materials.

Roof

The height of the addition's roof and eaves must be less than or equal to the existing structure.

Visually evident roof slopes should match the roof slopes of the existing structure, and roof planes should set in accordingly for rear additions.

Skylights should not be located on the front-facing slope of the roof. Skylights should be flat (no bubble lenses) with a low profile (no more than six inches tall) and only be installed behind the midpoint of the building).

Dormer additions are appropriate for some historic buildings as they are a traditional way of adding ventilation and light to upper stories.

The addition of a dormer that would require the removal of historic features such as an existing dormer, chimneys, cupolas or decorative feature is not appropriate.

Rear dormers should be inset from the side walls of the building by a minimum of two feet. The top of a rear dormer may attach just below the ridge of the main roof or lower.

Side dormers should be compatible with the scale and design of the building. Generally, this can be accomplished with the following:

- New dormers should be similar in design and scale to an existing dormer on the building.*
- New dormers should be similar in design and scale to an existing dormer on another historic building that is similar in style and massing.*
- The number of dormers and their location and size should be appropriate to the style and design of the building. Sometimes dormer locations relate to the openings below. The symmetry or lack of symmetry within a building design should be used as a guide when placing dormers.*
- Dormers should not be added to secondary roof planes.*
- Eave depth on a dormer should not exceed the eave depth on the main roof.*
- The roof form of the dormer should match the roof form of the building or be appropriate for the style.*
- The roof pitch of the dormer should generally match the roof pitch of the building.*
- The ridge of a side dormer should be at least 2' below the ridge of the existing building; the cheeks should be inset at least 2' from the wall below or adjacent valley; and the front wall of the gable should setback a minimum of 2' from the wall below. (These minimum insets will likely be greater than 2' when following the guidelines for appropriate scale.)*
- Dormers should generally be fully glazed and aprons below the window should be minimal.*
- The exterior material cladding of side dormers should match the primary or secondary material of the main building.*

Side Additions

When a lot width exceeds 60' or the standard lot width on the block, it may be appropriate to add a side addition to a historic structure. The addition should set back from the face of the historic structure (at or beyond the midpoint of the building) and should be subservient in height, width and massing to the historic structure.

Side additions should be narrower than half of the historic building width and exhibit a height of at least 2' shorter than the historic building.

To deemphasize a side addition, the roofing form should generally be a hip or side-gable roof form.

Commercial buildings that desire a covered open-air side additions generally should not enclose the area with plastic sides. Such applications may be appropriate if: the addition is located on the ground level off a secondary facade, is not located on a street facing side of a building, has a permanent glass wall on the portion of the addition which faces the street, and the front sits back a minimum of three (3') from the front or side wall, depending on placement of the addition.

b. The creation of an addition through enclosure of a front porch is not appropriate.

Side porch additions may be appropriate for corner building lots or lots more than 60' wide.

c. Contemporary designs for additions to existing properties are not discouraged when such additions do not destroy significant historical, architectural, or cultural material; and when such design is compatible, by not contrasting greatly, with the size, scale, color, material, and character of the property, neighborhood, or environment.

d. A new addition should be constructed in such a manner that if the addition were to be removed in the future, the essential form and integrity of the original structure would be unimpaired.

Connections should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

e. Additions should follow the guidelines for new construction.

IV. B. Demolition

1. Demolition is not appropriate

- a. if a building, or major portion of a building, is of such architectural or historical interest and value that its removal would be detrimental to the public interest; or
- b. if a building, or major portion of a building, is of such old or unusual or uncommon design and materials that it could not be reproduced or be reproduced without great difficulty and expense.

2. Demolition is appropriate

- a. if a building, or major portion of a building, has irretrievably lost its architectural and historical integrity and significance and its removal will result in a more historically appropriate visual effect on the district;
- b. if a building, or major portion of a building, does not contribute to the historical and architectural character and significance of the district and its removal will result in a more historically appropriate visual effect on the district; or

- c. if the denial of the demolition will result in an economic hardship on the applicant as determined by the MHZC in accordance with section 17.40.420 (Historic Zoning Regulations), Metropolitan Comprehensive Zoning Ordinance.

Background: 1905 Fatherland Street is a contributing one-story, shotgun-style house built circa 1930.

Analysis and Findings: The applicant proposes to construct a rear addition to the house. It will extend three feet (3') wider than the house on the right side.

Demolition: The project calls for demolition of the existing rear additions, replacing the roof structure, and changing two windows on the west side to four windows. The additions are not original to the house and were built after 1957, according to the Sanborn map from that year. The window openings being replaced are at the approximate midpoint of the house, and the visual impact of the change will be minimal. The owners intend to keep as much of the existing wood siding and windows as possible. Some replacement of siding, windows or doors may be required. Removal or replacement of these portions of the house will not be detrimental to the historical or architectural integrity of the building. The partial demolition requested meets section IV.B.2 for appropriate demolition and does not meet section IV.B.1 for inappropriate demolition.

Height, Scale, Location:

The addition will tie into the existing house in the location of two existing additions at the rear, added at different times since 1957. It will have the same ridge height, eave height and foundation height as the house currently. It will add twenty-one feet, two inches (21'2") to the depth of the house, with an additional eight feet (8') of rear porch. The additional footprint will be approximately five hundred and sixty-seven square feet (567 sq. ft.).



Figure 1. 1905 Fatherland Street



Figure 2. This perspective image from the left rear shows the new construction (foreground) with its inset from the historic house.

A twenty-one foot (21') section of the addition's right side is proposed to be wider than the side wall of the house by three feet (3') (see Figure 3). The design guidelines state that an addition may go wider than the existing house if the house is thirty feet (30') or less in width. This house is twenty-five feet (25') wide. Given the especially narrow house and the fact that the extension still meets the bulk standards, staff finds that the width of the addition and the height and scale of the addition would be compatible with surrounding buildings and would meet guidelines II.B.1 and II.B.2.



Figure 3. View from the right front of the house. The proposed wider section of addition is highlighted.

Design:

The addition will be differentiated from the historic house with a one-foot inset on each side, as typically required of one-story additions. (Please see "roof shape" for the discussion of the roof form differentiation.) Staff finds the design to be appropriate. The project meets section II.B.2.c.

Setback & Rhythm of Spacing:

The addition will be ten feet (10') and twelve feet (12') from the left and right sides of the lot respectively. It will be approximately seventy-four feet (74') from the rear. The setbacks meet base zoning requirements, and section II.B.1.3.

Materials:

The exterior materials will include a concrete block foundation with a parge coat, and wood siding with a reveal matching the siding on the house, approximately four inches (4"). The structure and shingles of the existing roof will be replaced, maintaining the same height and pitch. Staff asks for approval of the roofing color. The exterior trim, including cornerboards, window casings and porch columns, will be wood. The new chimney will be brick. Staff asks to approve a masonry sample for dimensions, color and texture. The applicant has related to MHZC staff that they intend to retain as much of the original materials as possible, but replacement of some siding, windows or doors may be required. The details of new windows and doors were not specified; Staff requests approval of windows and doors prior to their purchase and installation. With Staff approval of masonry, roof color, windows and doors, the proposal meets guideline II.B.4.

Roof Shape:

The roof will continue the roof form of the house, a front-facing gable with 6/12 pitch. Typically, the Commission requests that the roof form of an addition be separated from the roof form of the original house; however, in this case the house is a small, one-story, front gable home. Front gable homes can be difficult to add on to in a way that differentiates both the roof and the walls of an addition from the historic house. Staff finds that the roof form is appropriate in this instance. Three skylights are proposed on the west side of the roof. The location and design of the skylights meet the requirement that they are flat, not on a front-facing roof slope, and that they are installed approximately beyond the midpoint of the building. A brick chimney will be rebuilt on the left side of the roof, in the location of an original chimney. Staff finds that the project meets section II.B.5.

Rhythm and Proportion of Openings:

The windows on the new construction will be generally twice as tall as they are wide, and There is no expanse of wall space greater than nine feet (9') without an opening. The existing attic window opening in the front gable will be retained, but the glass will be replaced with a louver. Staff finds that the project will meet section II.B.7 of the guidelines.


Appurtenances & Utilities: The project's site plan does not indicate changes to the site's appurtenances or utilities. If HVAC is to be moved, Staff requests that it be located at the rear, or on a side façade beyond the midpoint of the house. The application meets section II.B.9.


Recommendation:

Staff recommends approval with the conditions:


1. Staff approve the final details, dimensions and materials of windows and doors prior to purchase and installation; and,
2. Staff approve the roof color and masonry color, dimensions and texture
3. If HVAC and utilities are to be moved, that they be on the rear façade, or on a side façade beyond the midpoint of the house.

Meeting these conditions, Staff finds the project meets the design guidelines for the Lockeland Springs-East End Neighborhood Conservation Zoning Overlay.

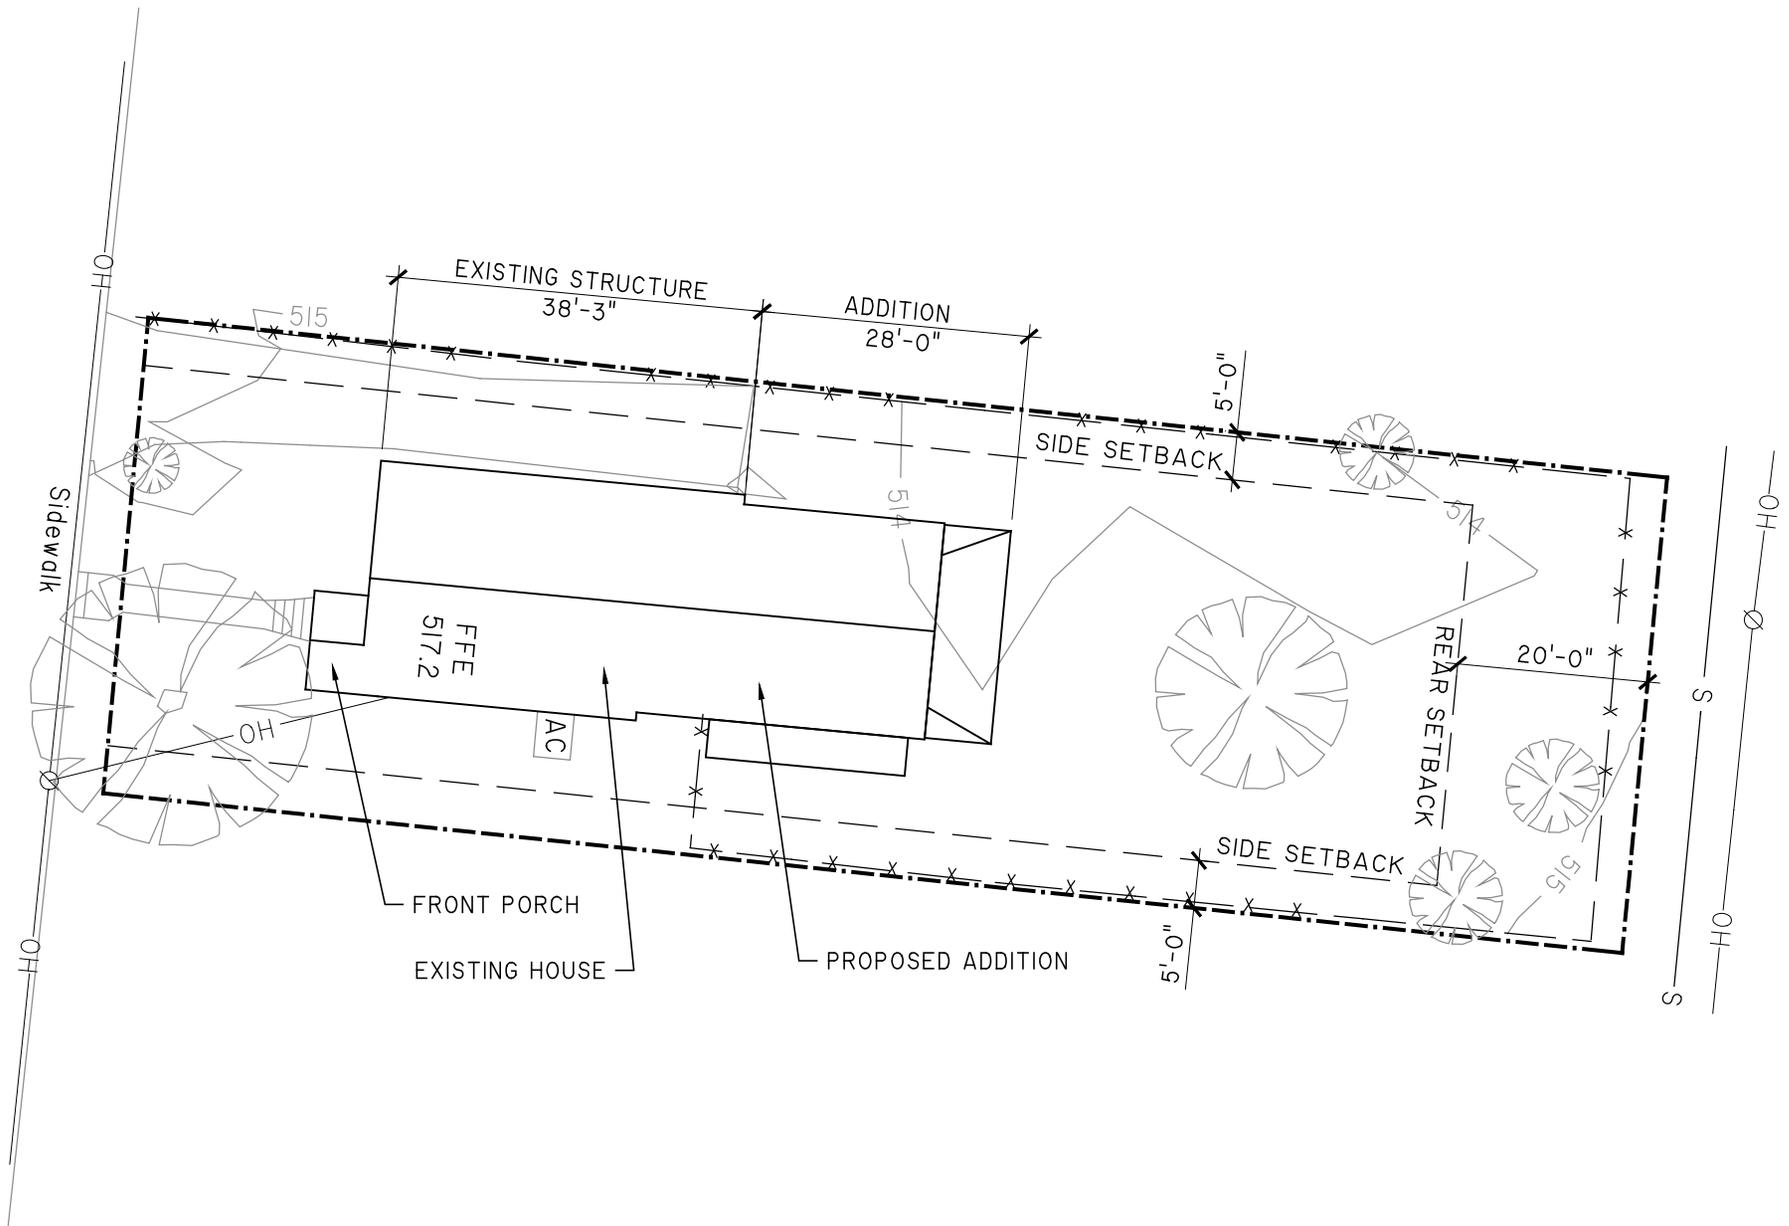


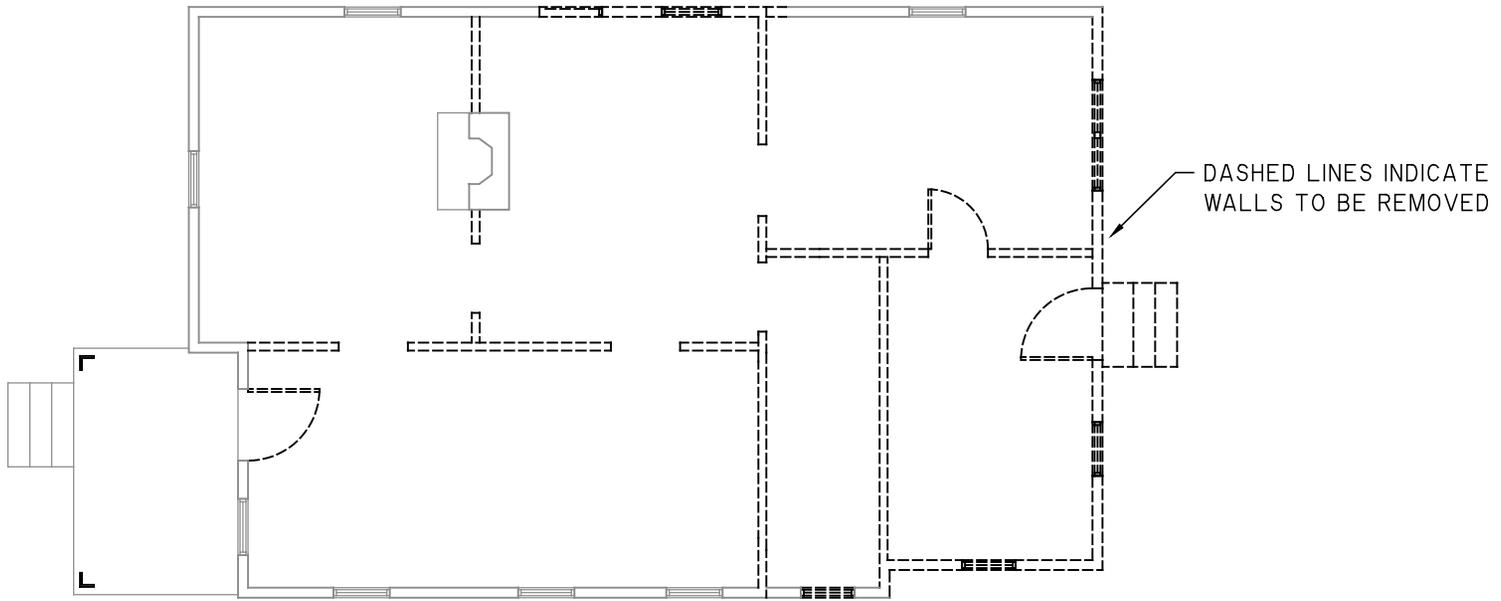


DEMOLITION FLOOR PLAN

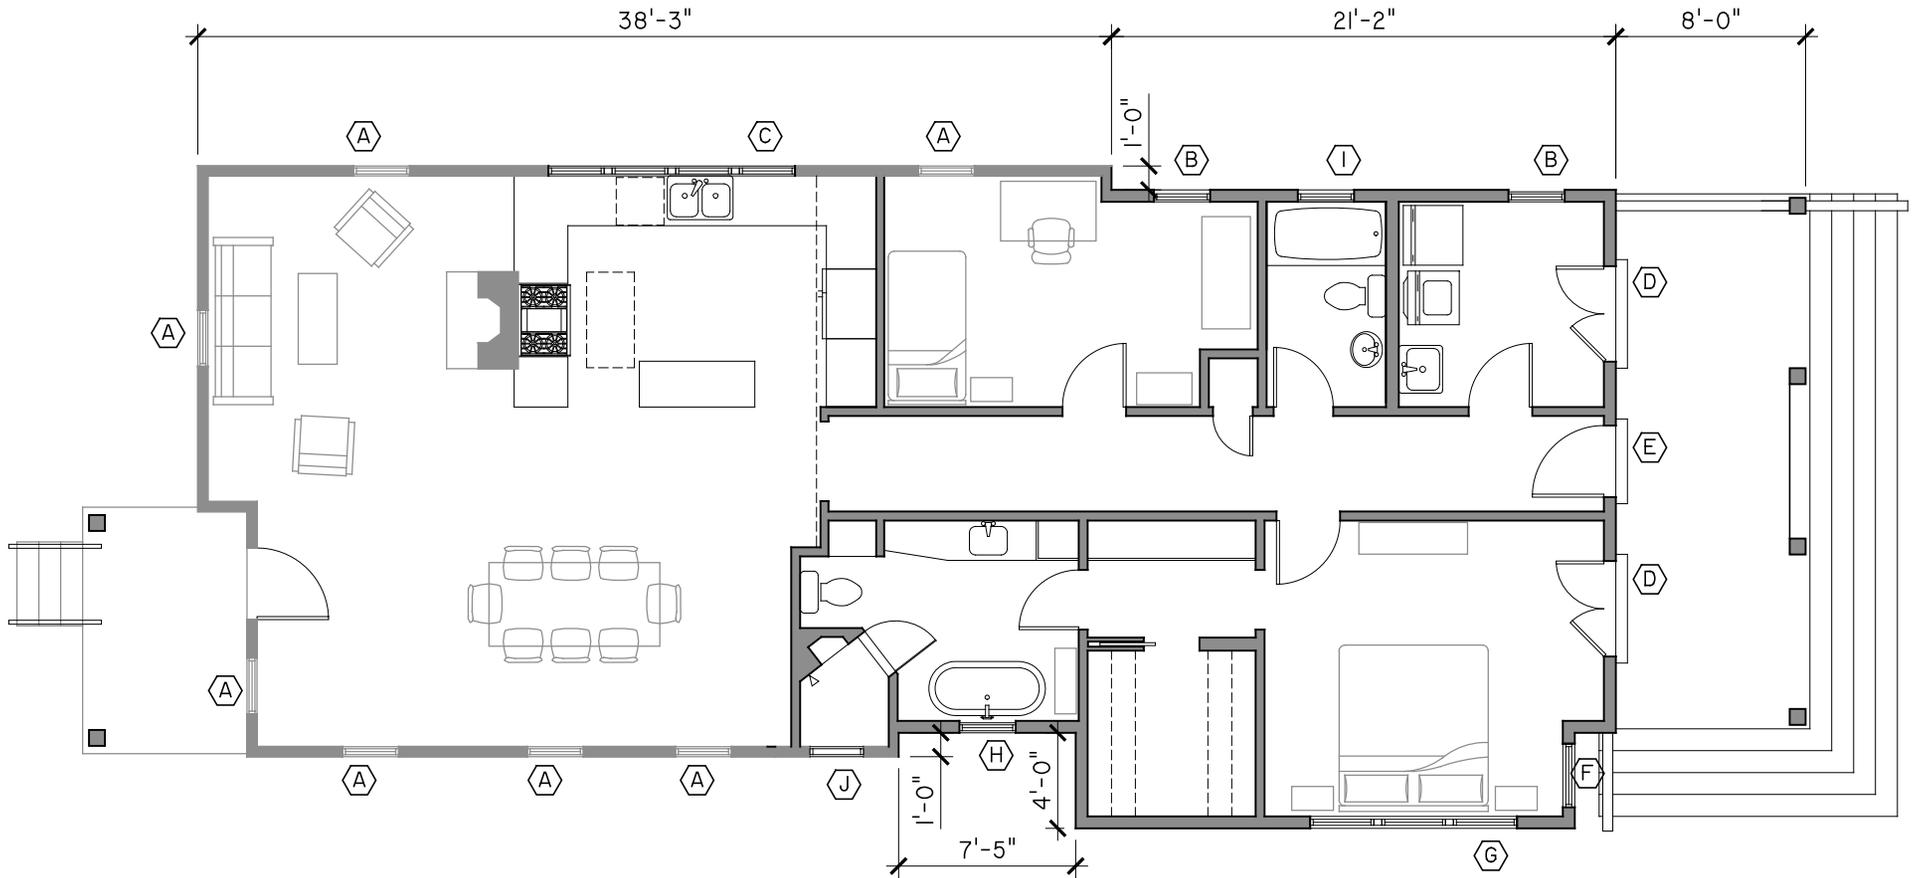

STRUCTURAL POST DIRECTLY BELOW RIDGE BEAM IS CONCEALED IN FALSE LOUVER WINDOW AT FRONT OF HOUSE. EXISTING OPENING TO BE CONVERTED TO FALSE LOUVER WITH USING RIDGED PANEL.

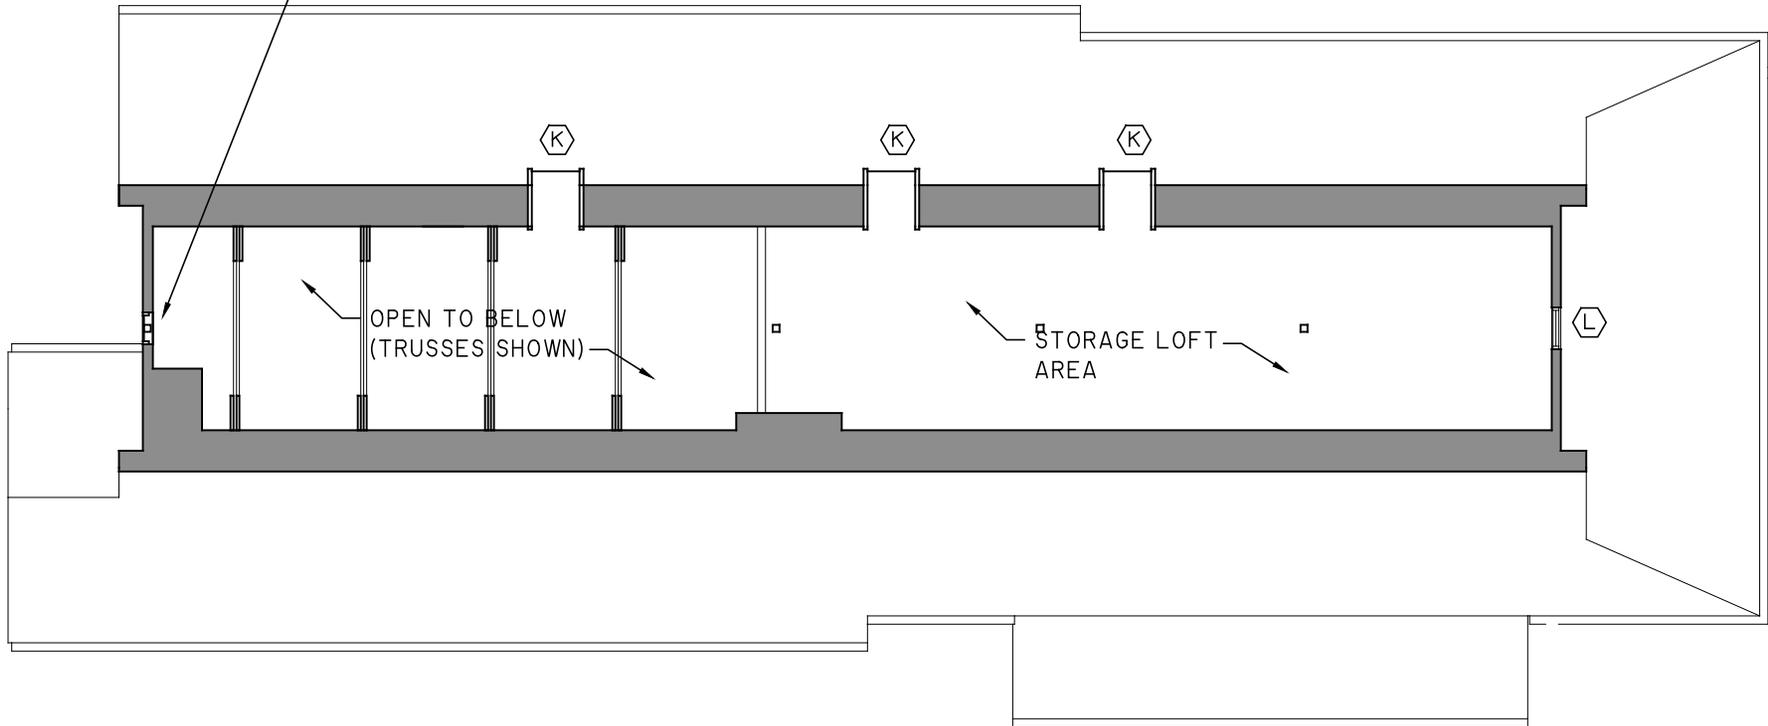

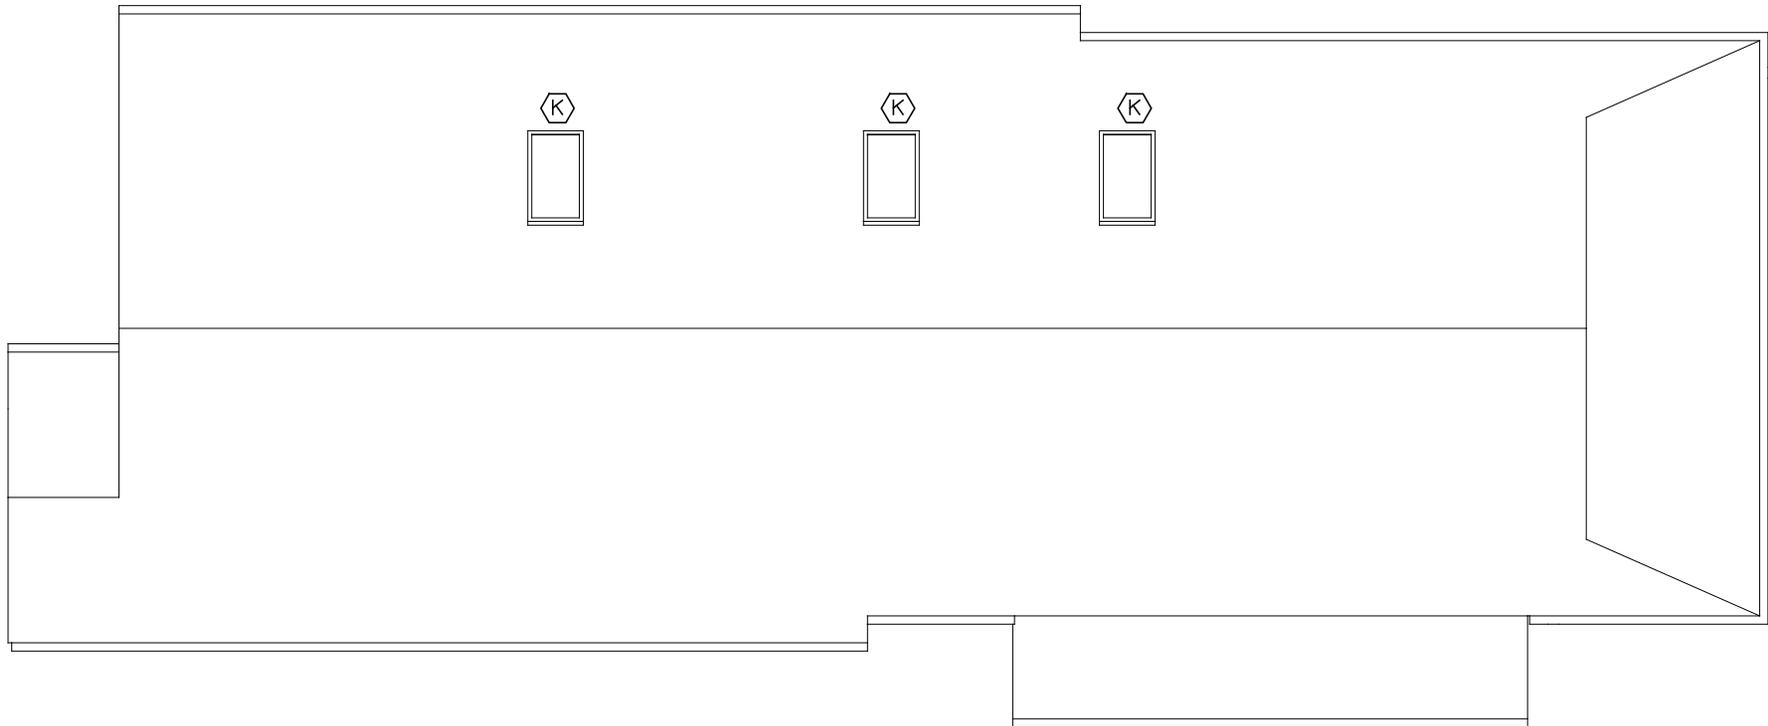


NEW WOOD SIDING
TO MATCH
EXISTING



COLUMNS TO MATCH FRONT
PORCH



REBUILT CHIMNEY TO
REPLACE MISSING ORIGINAL
CHIMNEY


FALSE LOUVER IN EXISTING
WINDOW OPENING (SEE LOFT
FLOOR PLAN)

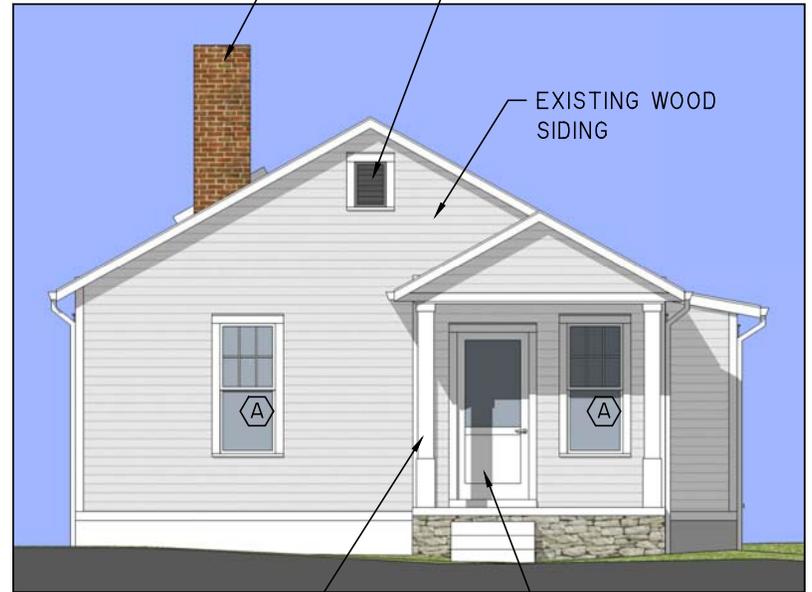


NEW WOOD COLUMNS ON
FRONT PORCH

NEW OR EXISTING FRONT
DOOR



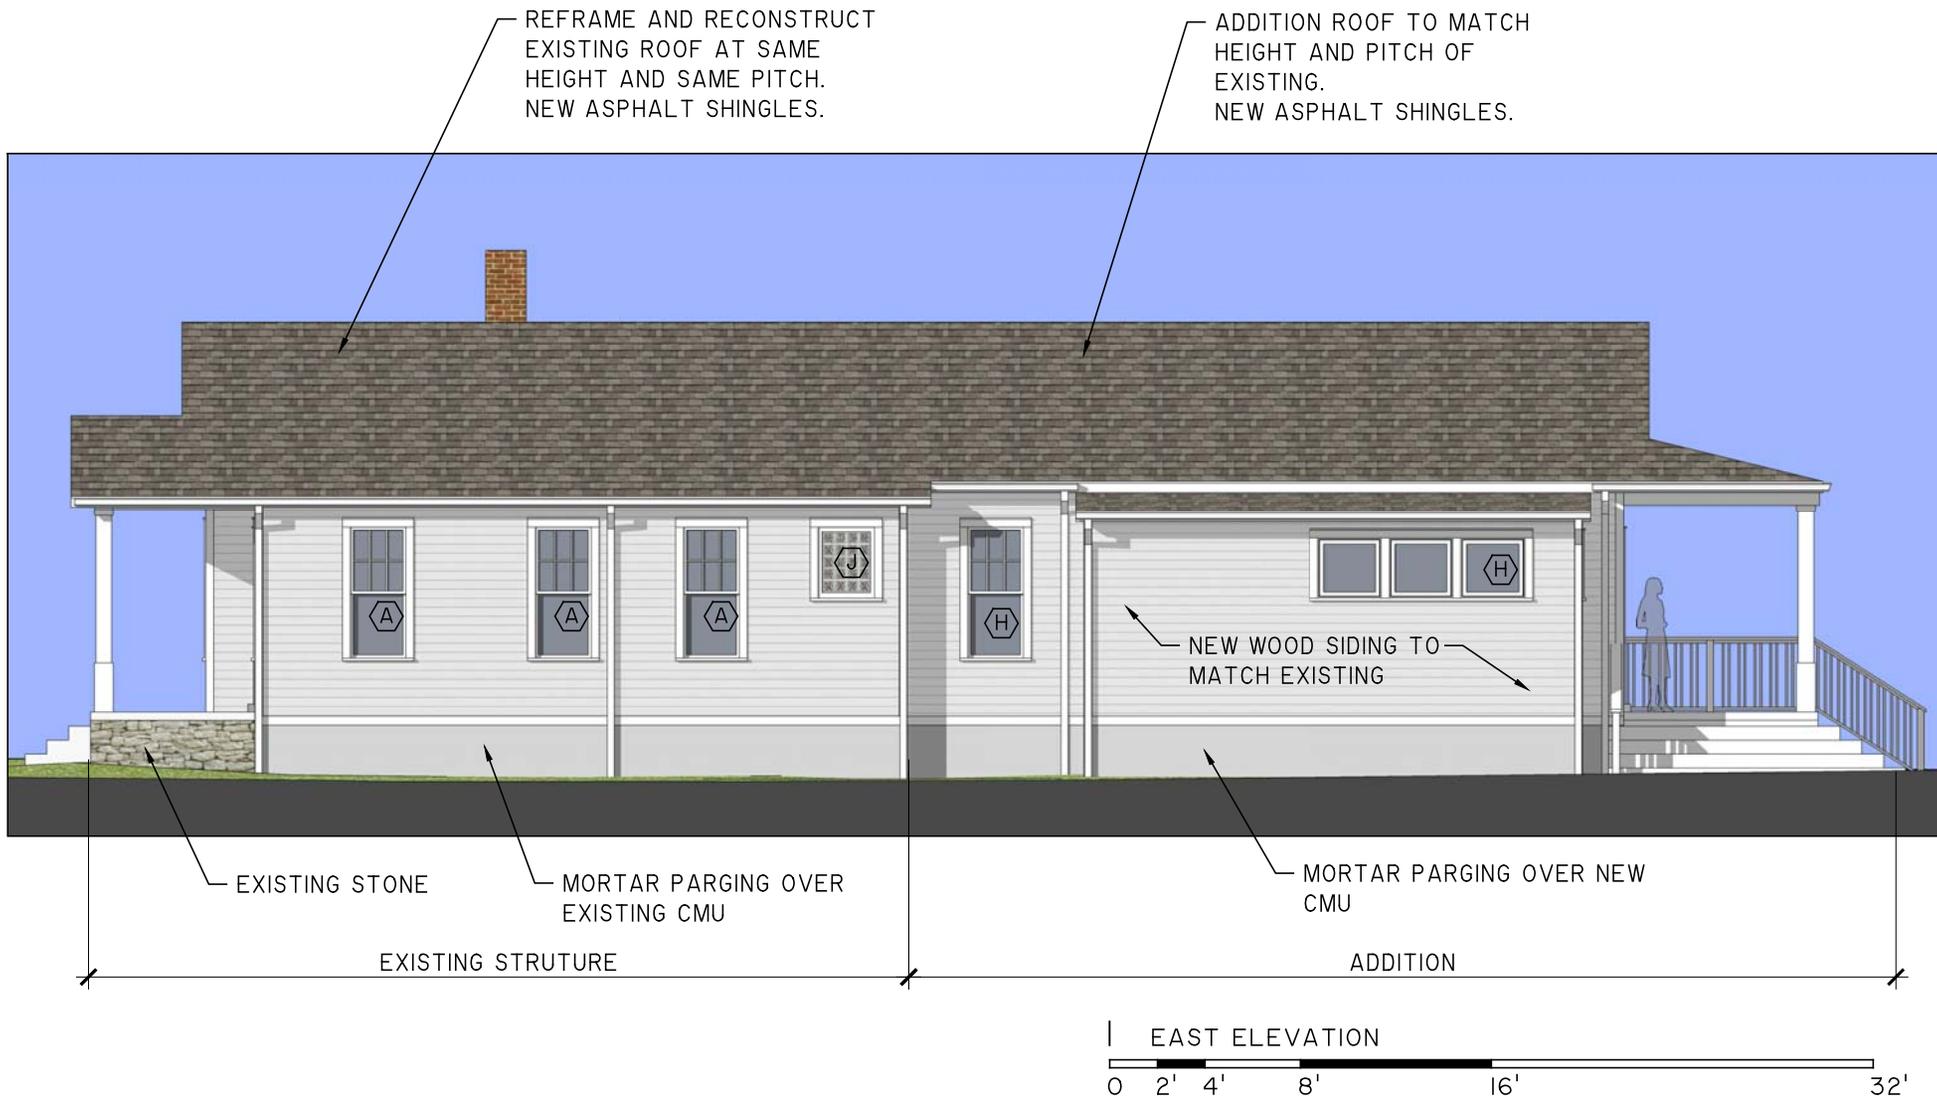

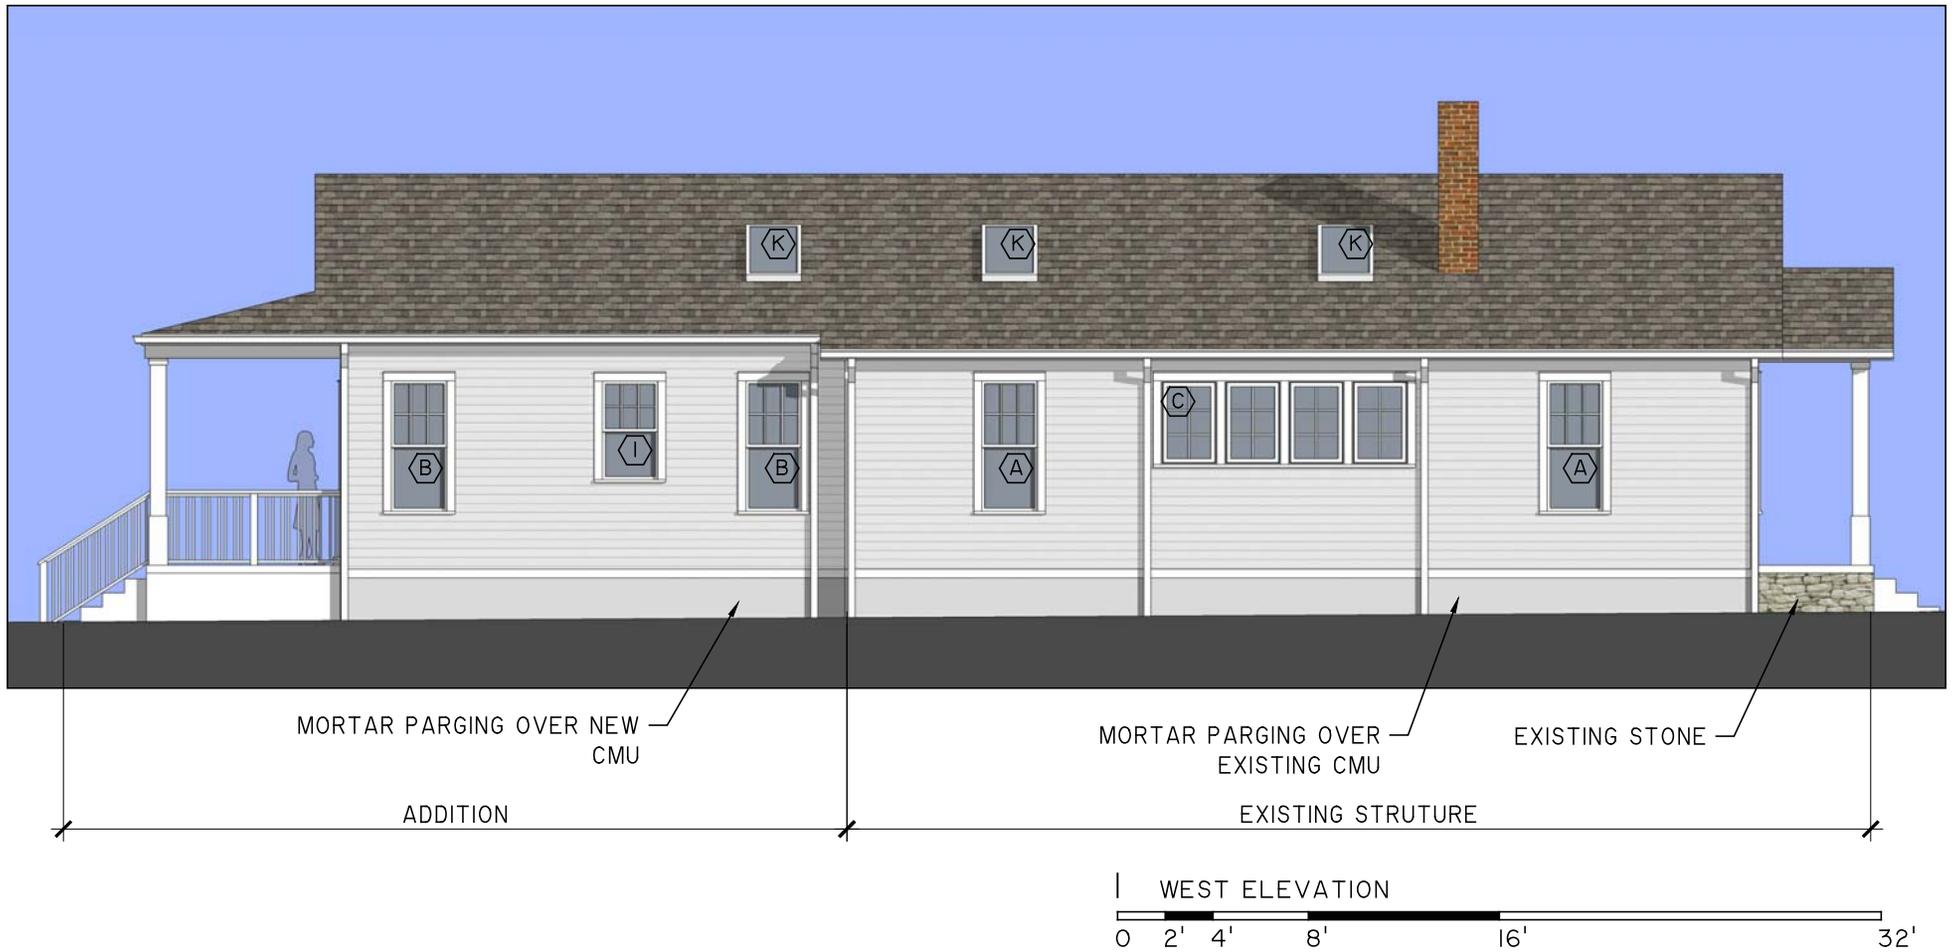



| PERSPECTIVE VIEW



| PERSPECTIVE VIEW
