

DAVID BRILEY
MAYOR



METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY

Metropolitan Historic Zoning Commission
Sunnyside in Sevier Park
3000 Granny White Pike
Nashville, Tennessee 37204
Telephone: (615) 862-7970
Fax: (615) 862-7974

STAFF RECOMMENDATION
235 Lauderdale Road
August 21, 2019


Application: Violation; New Construction—Addition; Partial Demolition
District: Cherokee Park Neighborhood Conservation Zoning Overlay
Council District: 24
Map and Parcel Number: 10312008200
Applicant: Brittany Benson
Project Lead: Melissa Sajid, melissa.sajid@nashville.gov

Description of Project: The applicant has demolished an existing pediment above the front door of a contributing building and constructed a front porch. The work was undertaken without any permits.


Recommendation Summary: Staff recommends disapproval finding that the new front porch does not meet Section II.B.2 for additions. Furthermore, staff recommends that the front porch be removed within thirty (30) days.

Attachments
A: Photographs
B: Site Plan
C: Elevations

Vicinity Map:

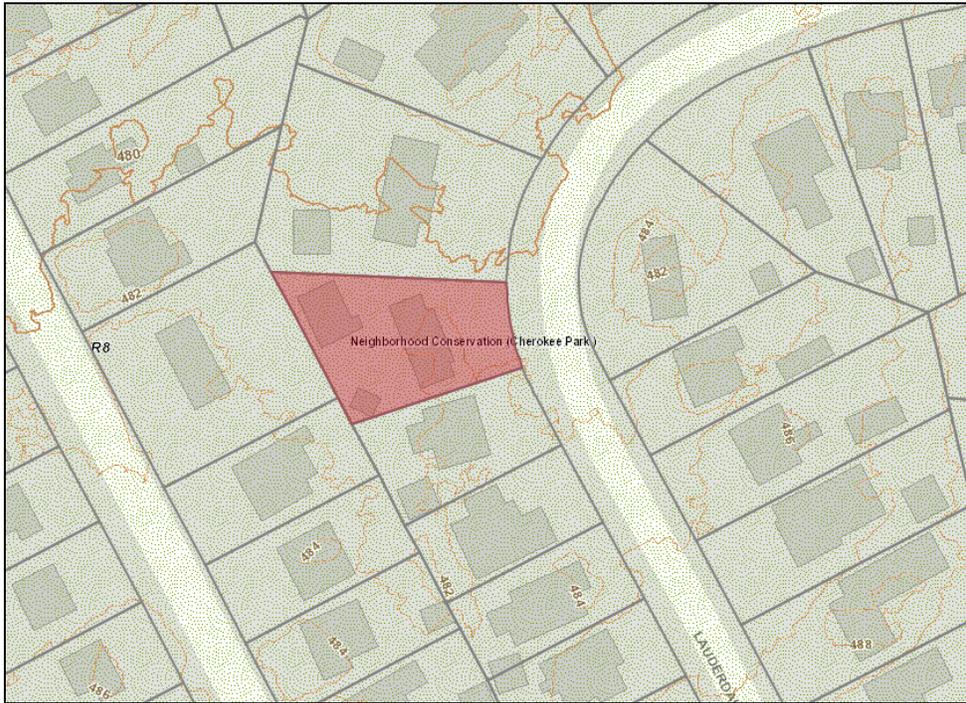

Aerial Map:

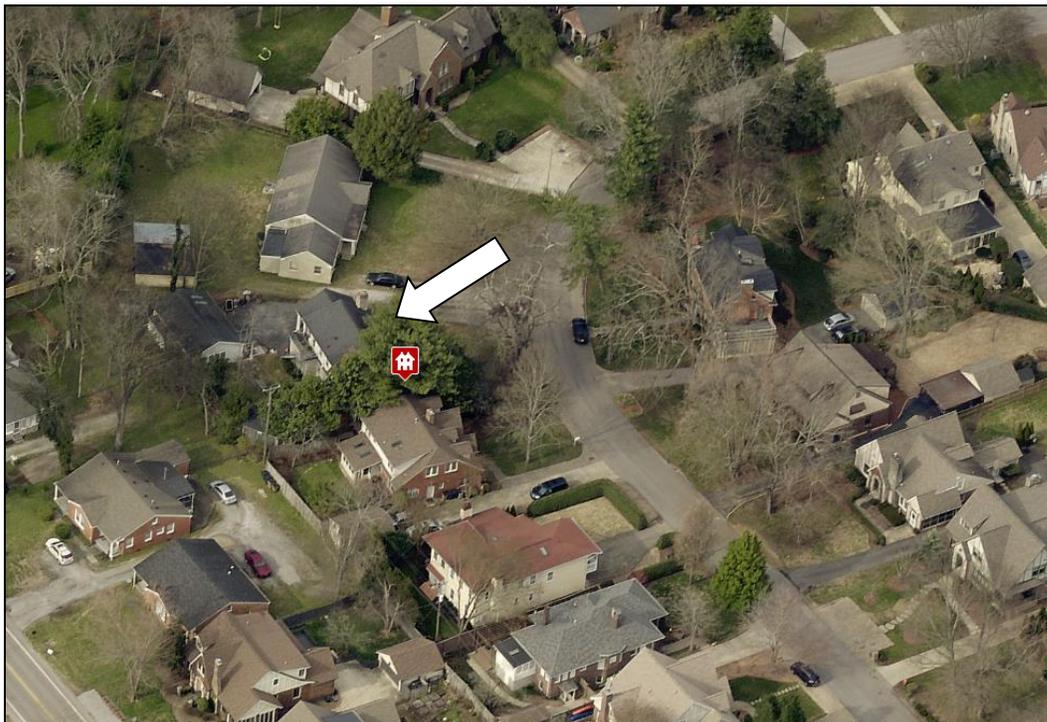

Applicable Design Guidelines:

II.B. GUIDELINES

a. Height

The height of the foundation wall, porch roof(s), and main roof(s) of a new building shall be compatible, by not contrasting greatly, with those of surrounding historic buildings.

b. Scale

The size of a new building and its mass in relation to open spaces shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.

c. Setback and Rhythm of Spacing

The setback from front and side yard property lines established by adjacent historic buildings should be maintained. Generally, a dominant rhythm along a street is established by uniform lot and building width. Infill buildings should maintain that rhythm.

The Commission has the ability to determine appropriate building setbacks and extend height limitations of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. 17.40.410).

Appropriate setbacks will be determined based on:

- The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;*
- Setbacks of like structures historically found on the site as determined by historic maps, site plans or photographs;*
- Shape of lot;*
- Alley access or lack thereof;*
- Proximity of adjoining structures; and*
- Property lines.*

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity*
- Existing or planned slope and grade*

In most cases, an infill duplex should be one building, as seen historically in order to maintain the rhythm of the street. Detached infill duplexes may be appropriate in the following instances:

- and width to the lot to accommodate two single-family dwellings in a manner that meets the design guidelines;*
- The second unit follows the requirements of a Detached Accessory Dwelling Unit; or*
- An existing non-historic building sits so far back on the lot that a building may be constructed in front of it in a manner that meets the rhythm of the street and the established setbacks.*
- There is not enough square footage to legally subdivide the lot but there is enough frontage*

d. Materials, Texture, Details, and Material Color

The materials, texture, details, and material color of a new building's public facades shall be visually compatible, by not contrasting greatly, with surrounding historic buildings. Vinyl and aluminum siding are not appropriate.

T-1-11- type building panels, "permastone", E.F.I.S. and other artificial siding materials are generally not appropriate. However, pre-cast stone and cement fiberboard siding are approvable cladding materials for new construction; but pre-cast stone should be of a compatible color and texture to existing historic stone clad structures in the district; and cement fiberboard siding, when used for lapped siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal. The reveal for lap siding should not exceed 5". Larger reveals may be possible but should not exceed 8" and shall have mitered corners.

With the exception of Cambridge Avenue which was developed earlier than all other streets within the historic district, brick and stone (primarily limestone) are the primary exterior claddings on historic structures in the neighborhood. Only on Cambridge Avenue is wood lap siding a primary exterior cladding on historic structures and considered compatible for infill construction.

Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").

Four inch (4") nominal corner boards are required at the face of each exposed corner.

Stud wall lumber and embossed wood grain are prohibited.

Belt courses or a change in materials from one story to another are often encouraged for large two-story buildings to break up the massing.

When different materials are used, it is most appropriate to have the change happen at floor lines.

Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate.

Texture and tooling of mortar on new construction should be similar to historic examples.

Asphalt shingle is an appropriate roof material for most buildings. Generally, roofing should not have strong simulated shadows in the granule colors which results in a rough, pitted appearance; faux shadow lines; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof.

Generally front doors should be 1/2 to full-light. Faux leaded glass is inappropriate.

e. Roof Shape

The roof(s) of a new building shall be visually compatible, by not contrasting greatly, with the roof shape, orientation, and pitch of surrounding historic buildings.

Roof pitches should be similar to the pitches found in the district. Historic roofs are generally between 6/12 and 12/12.

Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range.

Generally, two-story residential buildings have hipped roofs.

Generally, dormers should be located on the roof. Wall dormers are not typical in the historic context and accentuate height so they should be used minimally and generally only on secondary facades. When they are appropriate they should be no wider than the typical window openings and should not project beyond the main wall.

f. Orientation

The orientation of a new building's front facade shall be visually consistent with surrounding historic buildings.

Porches

New buildings should incorporate at least one front street-related porch that is accessible from the front street.

Side porches or porte cocheres may also be appropriate as a secondary entrance, but the primary entrance

should address the front.
Front porches generally should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals.

Parking areas and Driveways
Generally, curb cuts should not be added.

Where a new driveway is appropriate it should be two concrete strips with a central grassy median.
Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

g. Proportion and Rhythm of Openings

The relationship of width to height of windows and doors, and the rhythm of solids (walls) to voids (door and window openings) in a new building shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district.
In most cases, every 8-13 horizontal feet of flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

Double-hung windows should exhibit a height to width ratio of at least 2:1.

Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.

Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings.

Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.

Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

2. ADDITIONS

- a. Generally, an addition should be situated at the rear of a building in such a way that it will not disturb either front or side facades. Additions normally not recommended on historic structures may be appropriate for non-historic structures in Cherokee Park. Front or side alterations to non-historic buildings that increase habitable space or change exterior height should be compatible, by not contrasting greatly, with the adjacent historic buildings.

Placement

Additions should be located at the rear of an existing structure.

Connections to additions should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

Generally, one-story rear additions should inset one foot, for each story, from the side wall.

Additions should be physically distinguished from the historic building and generally fit within the shadow line of the existing building.

In order to assure that an addition has achieved proper scale, the addition should:

- *No matter their use, not be larger than the existing house, not including non-historic additions, in order to achieve compatibility in scale. This will allow for the retention of small and medium size homes in the neighborhood. The diversity of housing type and size is a character defining feature of the historic districts.*

- Additions which are essentially a house-behind-a-house with a long narrow connector are not appropriate, as the form does not exist historically. Short or minimal connections that do not require the removal of the entire back wall of a historic building are preferred.
 - Generally be shorter and thinner than the existing building. Exceptions may be made when unusual constraints make these parameters unreasonable, such as:
 - An extreme grade change
 - Atypical lot parcel shape or size
- In these cases, an addition may rise above or extend wider than the existing building; however, generally the addition should not higher and extend wider.

When an addition needs to be taller:

Whenever possible, additions should not be taller than the historic building; however, when a taller addition is the only option, additions to single story structures may rise as high as 4' above the shadow line of the existing building at a distance of 40' from the front edge of the existing building. In this instance, the side walls and roof of the addition must set in as is typical for all additions. The portion of the roof that can be seen should have a hipped, side gable or clipped gable roof to help decrease the visual mass of the addition.

When an addition needs to be wider:

Rear additions that are wider than an existing historic building may be appropriate when the building is narrower than 30' or shifted to one side of the lot. In these instances, a structural alcove or channel must separate the existing building from the new addition. The structural alcove should sit in a minimum of 1' and be at least twice as long as it is deep. In addition, a rear addition that is wider should not wrap the rear corner.

Ridge raises

Ridge raises are most appropriate for one-story, side-gable buildings, (without clipped gables) and that require more finished height in the attic. The purpose of a ridge raise is to allow for conditioned space in the attic and to discourage large rear or side additions. The raised portion must sit in a minimum of 2' from each side wall and can be raised no more than 2' of total vertical height within the same plane as the front roof slope.

Sunrooms

Metal framed sunrooms, as a modern interpretation of early green houses, are appropriate if they are mostly glass or use appropriate cladding material for the district, are located at the rear in a minimally visible location, are minimally attached to the existing structure, and follow all other design guidelines for additions.

Foundation

Foundation walls should set in from the existing foundation at the back edge of the existing structure by one foot for each story or half story. Exception: When an addition is a small one-room deep (12' deep or less) addition that spans the width of the structure, and the existing structure is masonry with the addition to be wood (or appropriate substitute siding). The change in material from masonry to wood allows for a minimum of a four inch (4") inset.

Foundation height should match or be lower than the existing structure.

Foundation lines should be visually distinct from the predominant exterior wall material. This is generally accomplished with a change in materials.

Roof

The height of the addition's roof and eaves must be less than or equal to the existing structure.

Visually evident roof slopes should match the roof slopes of the existing structure, and roof planes should set in accordingly for rear additions.

Skylights should not be located on the front-facing slope of the roof. Skylights should be flat (no bubble

lenses) with a low profile (no more than six inches tall) and only be installed behind the midpoint of the building).

Rear & Side Dormers

Dormer additions are appropriate for some historic buildings as they are a traditional way of adding ventilation and light to upper stories.

The addition of a dormer that would require the removal of historic features such as an existing dormer, chimneys, cupolas or decorative feature is not appropriate.

Rear dormers should be inset from the side walls of the building by a minimum of two feet. The top of a rear dormer may attach just below the ridge of the main roof or lower.

Side dormers should be compatible with the scale and design of the building. Generally, this can be accomplished with the following:

- New dormers should be similar in design and scale to an existing dormer on the building.*
- New dormers should be similar in design and scale to an existing dormer on another historic building that is similar in style and massing.*
- The number of dormers and their location and size should be appropriate to the style and design of the building. Sometimes dormer locations relate to the openings below. The symmetry or lack of symmetry within a building design should be used as a guide when placing dormers.*
- Dormers should not be added to secondary roof planes.*
- Eave depth on a dormer should not exceed the eave depth on the main roof.*
- The roof form of the dormer should match the roof form of the building or be appropriate for the style.*
- The roof pitch of the dormer should generally match the roof pitch of the building.*
- The ridge of a side dormer should be at least 2' below the ridge of the existing building; the cheeks should be inset at least 2' from the wall below or adjacent valley; and the front wall of the gable should setback a minimum of 2' from the wall below. (These minimum insets will likely be greater than 2' when following the guidelines for appropriate scale.)*
- Dormers should generally be fully glazed and aprons below the window should be minimal.*
- The exterior material cladding of side dormers should match the primary or secondary material of the main building.*

Side Additions

b. When a lot width exceeds 60 feet or the standard lot width on the block, it may be appropriate to add a side addition to a historic structure. The addition should set back from the face of the historic structure and should be subservient in height, width and massing to the historic structure.

Side additions should be narrower than half of the historic building width and exhibit a height of at least 2' shorter than the historic building.

To deemphasize a side addition, the roofing form should generally be a hip or side-gable roof form.

c. The creation of an addition through enclosure of a front porch is not appropriate. The creation of an addition through the enclosure of a side porch may be appropriate if the addition is constructed in such a way that original form and openings on the porch remain visible and undisturbed.

Side porch additions may be appropriate for corner building lots or lots more than 60' wide.

d. Contemporary designs for additions to existing properties are not discouraged when such additions do not destroy significant historical, architectural, or cultural material; and when such design is compatible, by not contrasting greatly, with the size, scale, color, material, and character of the property, neighborhood, or environment.

e. A new addition should be constructed in such a manner that if the addition were to be removed in the future, the essential form and integrity of the original structure would be unimpaired.

Connections should, as much as possible, use existing window and door openings rather than remove significant amounts of rear wall material.

f. A new addition should be constructed in such a manner that if the addition were to be removed in the future, the essential form and integrity of the original structure would be unimpaired.

g. Additions should follow the guidelines for new construction.

Background: The house located at 235 Lauderdale Road is a Minimal Traditional style constructed c. 1935. The house contributes to the character of the Cherokee Park Neighborhood Conservation Zoning overlay.

A new front porch was constructed, and the pediment was removed without any permits (Figure 1). The earliest photo available is the 1968 photo from the Property Assessor; it shows the same front entry configuration that was there until the recent changes were made (Figures 2 and 3). The front façade including the front door surround appear to be the same as what was there prior to the construction of the front porch. The trim on the sides of the door remains but has been painted.



Figure 1: 235 Lauderdale, July 2019.



Figure 2: 1968 Property Assessor's photo.



Figure 3: 235 Lauderdale Road c. 2016 (Google maps).

Porches and primary entrances are “character defining features” which the Secretary of Interior Standards requires be preserved. The Minimal Traditional style gained in popularity after World War I and is a simplified interpretation of the earlier revival styles. They are generally one to one and one-half stories tall with low pitched roofs and little to no eave overhang. The entrances are generally a decorative surround or hood, which is the only feature to exhibit a revival style. Porches are atypical of this style.

Analysis and Findings:

Location & Removability: Generally, an addition should be located at the rear of the building in a way that will not disturb the front façade. The front porch addition is not appropriate as it alters the design of the front of the historic building. Since the porch addition required the removal of the existing pediment it is not possible to remove the proposed porch in a manner that preserves the original look and configuration of the character defining stoop with pediment. The project does not meet Section II.B.2.a and e.


Design: The project is to place a historic design on a historic house of a different style. The proposal includes a craftsman-style porch, but the house is an English cottage style home. In addition, the project required the removal of a historic feature since the addition required the removal of the historic pediment. For these reasons, staff finds the design of the front addition to be inappropriate and to not meet Section II.B.2.a and f.

Materials: The materials were not indicated on the drawings, but it appears that the front porch is constructed of wood that has been painted. While wood would typically be an appropriate material for a front porch, the addition of the front porch is not appropriate in this case. Therefore, staff finds that the materials do not meet Section II.B.1.d

Roof form: The porch itself is not appropriate, as discussed previously. The pediment was gabled with a slope similar to the existing front dormers. As constructed, the front porch is also gabled but appears to have a lower pitch. The proposed roof form proposed is not appropriate, and the project does not meet Section II.B.1.e.

Recommendation: Staff recommends disapproval finding that the new front porch does not meet Section II.B.2 for additions. Furthermore, staff recommends that the front porch be removed within thirty (30) days.



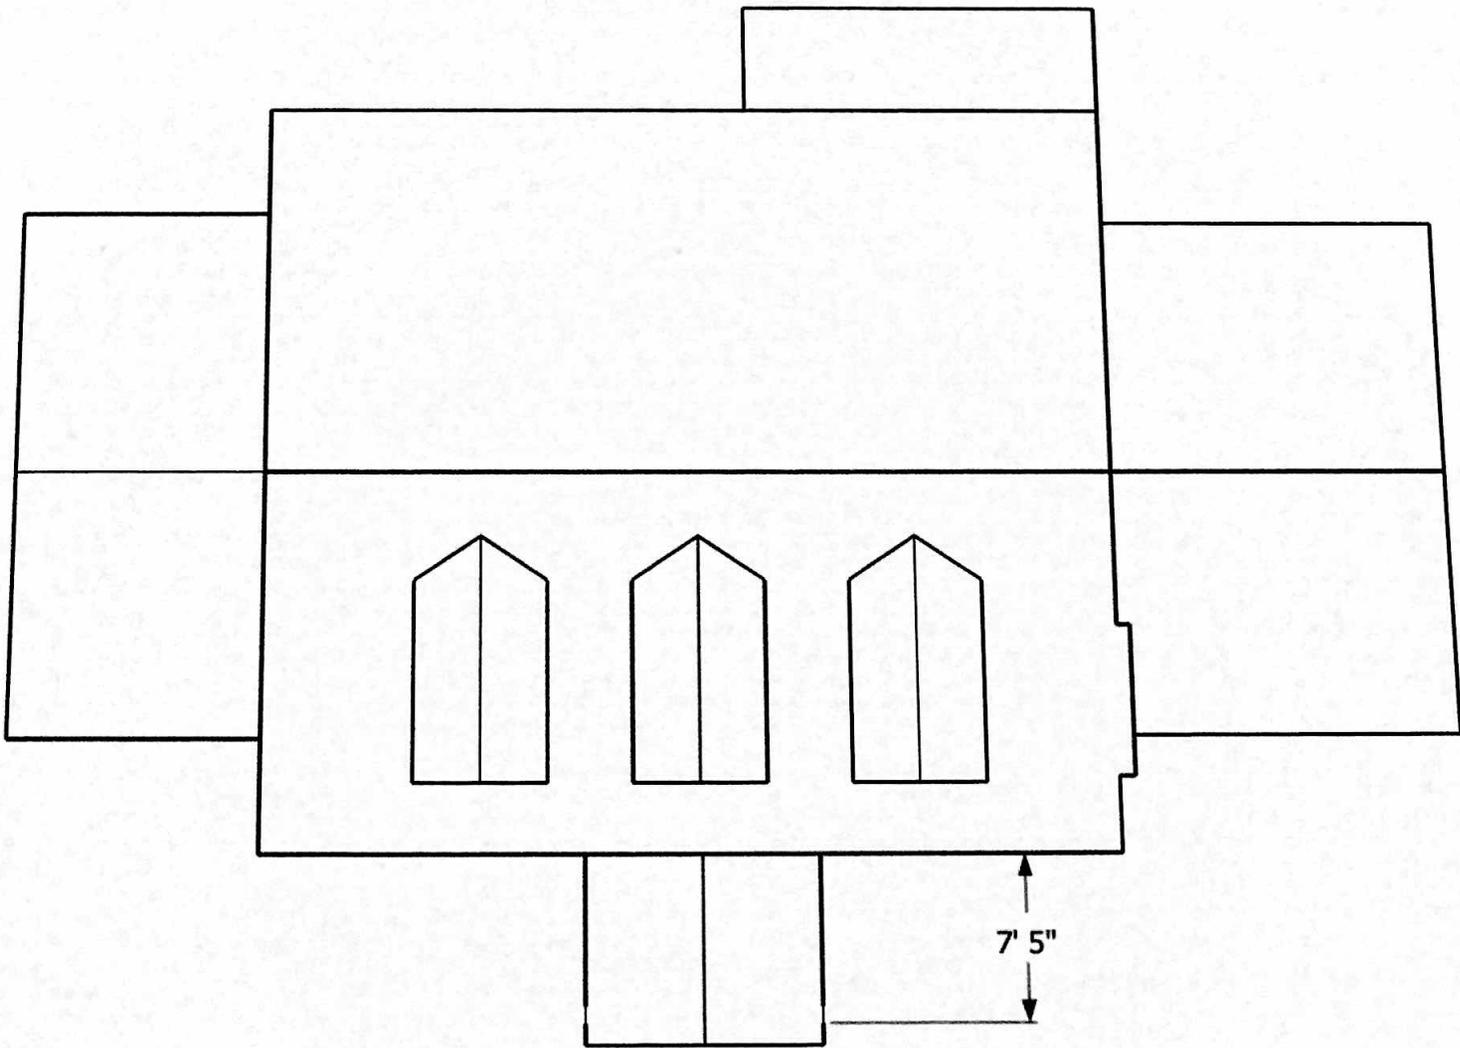

06/29/2019

Regarding: 235 Lauderdale Rd, Nashville TN 37205 and the installation of a covered entry.

To the department of codes and building safety:

The signatures below represent those in favor of our installation of a covered entryway on Lauderdale rd in Cherokee Park. All signees agree plans for the structure conform to the neighborhood esthetic.

Our hope is with the support of our neighbors our application for a building permit is granted.

Sincerely,

Brendan and Brittany Benson
235 Lauderdale Rd Nashville TN 37205
(615)289-4150

Lee Kelly 237 Lauderdale Rd

Bill & ELIZABETH TENNYSON 233 LAUDERDALE RD

Lydia A. Howarth, 230 Lauderdale Rd 37205

Ben Bacon 243 Lauderdale Rd

Patricia & David 234 Lauderdale Rd 37205
Steine

Elizabeth Brabbury 246 Lauderdale Rd
37205

JACOB BENSON 249 Lauderdale Rd.

Claire Reagan 250 Lauderdale Rd

Jane Park 227 Lauderdale

Hillie & Archie Potts, 222 Lauderdale Rd 37205