

JOHN COOPER
MAYOR



METROPOLITAN GOVERNMENT OF NASHVILLE AND DAVIDSON COUNTY


Metropolitan Historic Zoning Commission
Sunnyside in Sevier Park
3000 Granny White Pike
Nashville, Tennessee 37204
Telephone: (615) 862-7970

STAFF RECOMMENDATION
1906 Blair Boulevard
October 21, 2020

Application: New Construction—Infill
District: Belmont-Hillsboro Neighborhood Conservation Zoning Overlay
Council District: 18
Base Zoning: R6
Map and Parcel Number: 10416002100
Applicant: Will Jenner of Jenner Design, LLC
Project Lead: Sean Alexander, sean.alexander@nashville.gov

| | |
|---|---|
| <p>Description of Project: A proposal to construct a new two-story house. The house will be thirty-five feet (35') wide, with a cross-gabled roof and a partial-width one-story porch.</p> <p>Recommendation Summary: Staff Recommends approval of the proposed infill construction with the following conditions:</p> <ol style="list-style-type: none">1. The finished floor height shall be consistent with the finished floor heights of the adjacent historic houses, to be verified by MHZC staff in the field;2. The front setback shall be consistent with the setbacks of the adjacent historic houses, to be verified by MHZC staff in the field;3. The window and door selections and roof color shall be approved prior to purchase and construction;4. The front porch columns shall be finished with capitals and bases; and,5. The HVAC units shall be located on the rear of the building or on the side behind the midpoint. <p>With these conditions, staff finds that the proposal will meet the design guidelines for new construction in the Belmont-Hillsboro Neighborhood Conservation Zoning Overlay.</p> | <p>Attachments</p> <ul style="list-style-type: none">A: Context PhotographsB: Site PlanC: FloorplansD: Elevations |
|---|---|

Vicinity Map:

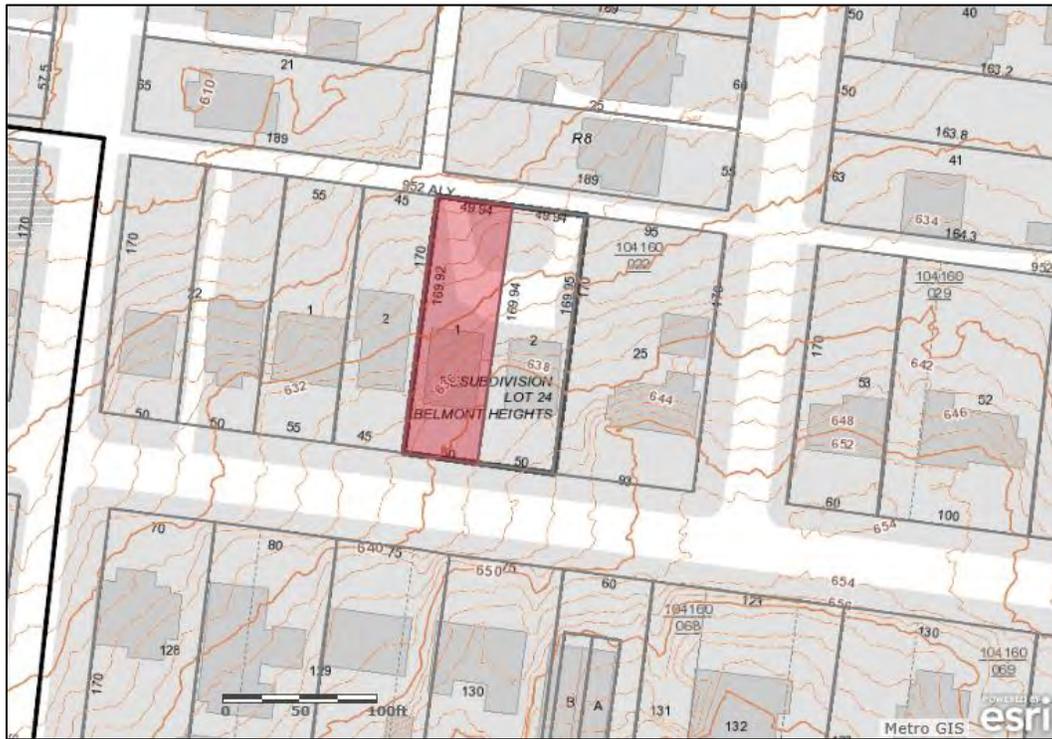

Aerial Map:



Applicable Design Guidelines:

II. NEW CONSTRUCTION

B. GUIDELINES

a. Height

The height of the foundation wall, porch roof(s), and main roof(s) of a new building shall be compatible, by not contrasting greatly, with those of surrounding historic buildings.

b. Scale

The size of a new building and its mass in relation to open spaces shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Foundation lines should be visually distinct from the predominant exterior wall material. This is typically accomplished with a change in material.

c. Setback and Rhythm of Spacing

The setback from front and side yard property lines established by adjacent historic buildings should be maintained. Generally, a dominant rhythm along a street is established by uniform lot and building width. Infill buildings should maintain that rhythm.

The Commission has the ability to determine appropriate building setbacks and extend height limitations of the required underlying base zoning for new construction, additions and accessory structures (ordinance no. BL2007-45).

Appropriate setbacks will be determined based on:

- The existing setback of the contributing primary buildings and accessory structures found in the immediate vicinity;*
- Setbacks of like structures historically found on the site as determined by historic maps, site plans or photographs;*
- Shape of lot;*
- Alley access or lack thereof;*
- Proximity of adjoining structures; and*
- Property lines.*

Appropriate height limitations will be based on:

- Heights of historic buildings in the immediate vicinity*
- Existing or planned slope and grade*

In most cases, an infill duplex should be one building, as seen historically in order to maintain the rhythm of the street. Detached infill duplexes may be appropriate in the following instances:

- There is not enough square footage to legally subdivide the lot but there is enough frontage and width to the lot to accommodate two single-family dwellings in a manner that meets the design guidelines;*
- The second unit follows the requirements of a Detached Accessory Dwelling Unit; or*
- An existing non-historic building sits so far back on the lot that a building may be constructed in front of it in a manner that meets the rhythm of the street and the established setbacks.*

d. Materials, Texture, Details, and Material Color

The materials, texture, details, and material color of a new building's public facades shall be visually compatible, by not contrasting greatly, with surrounding historic buildings. Vinyl and aluminum siding are not appropriate.

T-1-11- type building panels, "permastone", E.F.I.S. and other artificial siding materials are generally not appropriate. However, pre-cast stone and cement fiberboard siding are approvable cladding materials for new construction; but pre-cast stone should be of a compatible color and texture to existing historic stone clad structures in the district; and cement fiberboard siding, when used for lapped siding, should be smooth and not stamped or embossed and have a maximum of a 5" reveal. The reveal for lap siding should not exceed 5". Larger reveals may be possible but should not exceed 8" and shall have mitered corners.

Shingle siding should exhibit a straight-line course pattern and exhibit a maximum exposure of seven inches (7").

Four inch (4") nominal corner boards are required at the face of each exposed corner.

Stud wall lumber and embossed wood grain are prohibited.

Belt courses or a change in materials from one story to another are often encouraged for large two-story buildings to break up the massing.

When different materials are used, it is most appropriate to have the change happen at floor lines.

Clapboard sided chimneys are generally not appropriate. Masonry or stucco is appropriate.

Texture and tooling of mortar on new construction should be similar to historic examples.

Asphalt shingle is an appropriate roof material for most buildings. Generally, roofing should not have strong simulated shadows in the granule colors which results in a rough, pitted appearance; faux shadow lines; strongly variegated colors; colors that are too light (e.g.: tan, white, light green); wavy or deep color/texture used to simulate split shake shingles or slate; excessive flared form in the shingle tabs; uneven or sculpted bottom edges that emphasize tab width or edges, unless matching the original roof.

Generally front doors should be 1/2 to full-light. Faux leaded glass is inappropriate.

e. Roof Shape

The roof(s) of a new building shall be visually compatible, by not contrasting greatly, with the roof shape, orientation, and pitch of surrounding historic buildings. With the exception of chimneys, roof-top equipment and roof penetrations shall be located so as to minimize their visibility from the street.

Roof pitches should be similar to the pitches found in the district. Historic roofs are generally between 6/12 and 12/12.

Roof pitches for porch roofs are typically less steep, approximately in the 3-4/12 range.

Generally, two-story residential buildings have hipped roofs.

Generally, dormers should be located on the roof. Wall dormers are not typical in the historic context and accentuate height so they should be used minimally and generally only on secondary facades. When they are appropriate they should be no wider than the typical window openings and should not project beyond the main wall.

f. Orientation

The orientation of a new building's front facade shall be visually consistent with surrounding historic buildings.

Porches

New buildings should incorporate at least one front street-related porch that is accessible from the front street.

Side porches or porte cocheres may also be appropriate as a secondary entrance, but the primary entrance should address the front.

Front porches generally should be a minimum of 6' deep, have porch racks that are 1'-3' tall and have posts that include bases and capitals.

Parking areas and Driveways

Generally, curb cuts should not be added.

Where a new driveway is appropriate it should be two concrete strips with a central grassy median. Shared driveways should be a single lane, not just two driveways next to each other. Sometimes this may be accomplished with a single lane curb cut that widens to a double lane deeper into the lot.

Duplexes

Infill duplexes shall have one or two doors facing the street, as seen on historic duplexes. In the case of corner lots, an entrance facing the side street is possible as long as it is designed to look like a secondary entrance.

In the case of duplexes, vehicular access for both units should be from the alley, where an alley exists. A new shared curb cut may be added, if no alley and no driveway exists, but the driveway should be no more than 12' wide from the street to the rear of the home. Driveways should use concrete strips where they are typical of the historic context. Front yard parking or driveways which end at the front of the house are not consistent with the character of the historic neighborhoods.

Multi-unit Developments

For multi-unit developments, interior dwellings should be subordinate to those that front the street.

Subordinate generally means the width and height of the buildings are less than the primary building(s) that faces the street.

For multi-unit developments, direct pedestrian connections should be made between the street and any interior units. The entrances to those pedestrian connections generally should be wider than the typical spacing between buildings along the street.

g. Proportion and Rhythm of Openings

The relationship of width to height of windows and doors, and the rhythm of solids (walls) to voids (door and window openings) in a new building shall be compatible, by not contrasting greatly, with surrounding historic buildings.

Window openings on the primary street-related or front façade of new construction should be representative of the window patterns of similarly massed historic structures within the district. In most cases, every 8-13 horizontal feet of flat wall surface should have an opening (window or door) of at least 4 square feet. More leniencies can be given to minimally visible side or rear walls.

Double-hung windows should exhibit a height to width ratio of at least 2:1.

Windows on upper floors should not be taller than windows on the main floor since historically first floors have higher ceilings than upper floors and so windows were typically taller on the first floor.

Single-light sashes are appropriate for new construction. If using multi-light sashes, muntins should be fully simulated and bonded to the glass, and exhibit an interior bar, exterior bar, as well as a spacer between glass panes.

Four inch (nominal) casings are required around doors, windows and vents on non-masonry buildings.

Trim should be thick enough to extend beyond the clapboard. Double or triple windows should have a 4" to 6" mullion in between.

Brick molding is required around doors, windows and vents within masonry walls but is not appropriate on non-masonry buildings.

h. Utilities

Utility connections such as gas meters, electric meters, phone, cable, and HVAC condenser units should be located so as to minimize their visibility from the street.

i. Outbuildings

(Although the MHZC does not review use itself there are additional ordinance requirements for buildings that have are or have a Detached Accessory Dwelling Unit (DADU) required by ordinance 17.16.030 that are reviewed by the MHZC. This information is provided for informational purposes only and does not replace ordinance 17.16.030.)

- 1) A new garage or storage building should reflect the character of the period of the house to which the outbuilding will be related. The outbuilding should be compatible, by not contrasting greatly, with surrounding historic outbuildings in terms of height, scale, roof shape, materials, texture, and details.

j. Public Spaces

Landscaping, sidewalks, signage, lighting, street furniture and other work undertaken in public spaces by any individual, group or agency shall be presented to the MHZC for review of compatibility with the character of the district.

Generally, mailboxes should be attached to the front wall of the house or a porch post. In most cases, street-side mailboxes are inappropriate.

Background: The structure at 1906 Blair Boulevard is a one-story brick duplex, constructed circa 1960. Demolition of the building was approved by the Commission in August.

A proposal to construct a two-story duplex was also approved by the Commission in August, with a condition that the width shall be reduced to thirty-five feet (35’).

The applicant has revised the project and is proposing to build a single family dwelling.



Figure 1: 1906 Blair Boulevard

Analysis and Findings: The applicant proposes to construct a new two-story house.

Height & Scale: The proposed new structure will have a two-story form with a height of thirty-three feet, six inches (33’-6”) from grade at the front, with an eave height of twenty feet, four inches (20’-4”) above the floor level and a one foot, four inch (1’-4”) tall foundation. The historic context includes one-and-one-half-story and two-and-one-half-story houses, ranging from twenty-two feet (22’) to thirty-six feet (36’) tall from grade. The structure will gain an additional story in the rear due to a significant drop in grade. This condition is typical of houses on similarly sloped lots. Staff finds the height of the proposed building will be compatible with the context.

The new building will be thirty-five feet (35') wide overall, with a porch and a projecting "ell" breaking the front façade up into smaller components.

Nearby houses are thirty feet (30') and thirty-two feet (32') wide. The two-and-one-half-story house two lots to the left at 1916 Blair Boulevard is thirty-nine feet (39') wide, on a lot that is fifty-five feet (55') wide. Staff finds the width of the proposed house to be appropriate, within the range of historic buildings nearby.

Staff finds that the height and width of the infill will be compatible with the surrounding context and that it will meet section II.B.1.a and b.

Setback & Rhythm of Spacing: The infill is proposed to be located with its front wall in line between the fronts of the two adjacent buildings houses, matching their street setbacks. The house will be centered on the lot with side setbacks of seven feet, five inches (7'-5") on both sides. The rear setback will be fifty-eight feet (58'). Staff finds that the rhythm of spacing between the infill and the adjacent buildings will be compatible with historic houses on comparable lots, which typically have side setbacks between eight feet (8') to ten feet (10').

Staff finds that the setbacks of the infill would be consistent with those of surrounding historic houses nearby and would meet section II.B.1.c. of the design guidelines.

Materials:

| | Proposed | Color/Texture/Make/Manufacturer | Approved Previously or Typical of Neighborhood | Requires Additional Review |
|---------------------------|-------------------------------|--|---|-----------------------------------|
| Foundation | Brick | Selection Needs Approval | Yes | X |
| Primary Cladding | 5" Cement-Fiber Clapboard | Smooth-faced | Yes | |
| Secondary Cladding | Cement-Fiber Board-and-batten | Smooth-faced | Yes | |
| Trim | Cement-Fiber | Smooth-faced | Yes | |
| Front Porch Floor | Cast-In-Place Concrete | Natural Color | Yes | |
| Front Porch Stairs | Cast-In-Place Concrete | Natural Color | Yes | |
| Front Porch Posts | Wood | Typical | Yes | |
| Front Porch Roof | Standing Seam Metal | Selection Needs Approval | | X |

| | | | | |
|---------------------------------|---------------------------------|--------------------------|-----|---|
| Rear Porch Floor | Wood | Typical | Yes | |
| Rear Porch Posts | Wood | Typical | Yes | |
| Rear Porch Railing | Wood | Typical | Yes | |
| Primary Roofing | Asphalt Shingle | Color Needs Approval | | X |
| Windows | Not indicated | Selection Needs Approval | | X |
| Principle Entrance Doors | Full-Glass Door, Divided Lights | Selection Needs Approval | | X |
| Driveway | Rear Access | Typical | Yes | |
| Walkway | Concrete | Typical | Yes | |

Staff finds that the proposal meets section II.B.1.d. of the guidelines, with conditions that the front porch columns shall be finished with capitals and bases, and that the roof color and the window and door selections shall be approved administratively.

Roof form: The roof of the new building will have a cross-gabled form with a pitch of 12/12 on the primary front and side-gabled components. The front elevation will have a projecting bay with a shed roof with a pitch of 8/12. The front porch will have a shed roof with a pitch of 3/12. These forms and pitches are consistent with the roofs of historic houses in the surrounding area.

Behind the side-gabled form, extending to the rear over the majority of the building, there will be a hipped roof a pitch of 7/12. This component will not be greatly visible from the right-of-way, and will not contrast greatly with the primary roof forms at the front of the building.

Staff finds that the roofs of the proposed infill are compatible with the surrounding context and meet section II.B.1.e. of the design guidelines.

Orientation: The primary entrance to the new house will be facing to the right, on the left wall inside the partial-width front porch. This orientation is consistent with that of surrounding houses along Blair Boulevard, as the front porch is clearly oriented toward the street. A concrete walkway will be added to connect the building to the sidewalk at the front of the lot.

Staff finds the orientation of the proposed new building to be compatible with the surrounding context and to meet section II.B.1.f. of the design guidelines.

Proportion and Rhythm of Openings: The windows on the front and sides of the proposed infill are all generally twice as tall as they are wide, consistent with the proportions of openings on historic houses nearby. There are no large expanses of wall space without a window or door opening.

Staff finds the project's proportion and rhythm of openings is compatible with the surrounding historic context, which meets Section II.B.1.g. of the design guidelines.

Appurtenances & Utilities: The proposal includes a walkway from the front of the building to the sidewalk at the front of the lot, which are common features in the neighborhood. The location of the HVAC and other utilities was not indicated in the proposal. Staff asks that the HVAC be located on the rear façade, or on a side façade beyond the midpoint of the house. The project meets section II.B.1.h.

Recommendation: Staff Recommends approval of the proposed infill construction with the following conditions:

1. The finished floor height shall be consistent with the finished floor heights of the adjacent historic houses, to be verified by MHZC staff in the field;
2. The front setback shall be consistent with the setbacks of the adjacent historic houses, to be verified by MHZC staff in the field;
3. The window and door selections and roof color shall be approved prior to purchase and construction;
4. The front porch columns shall be finished with capitals and bases; and,
5. The HVAC units shall be located on the rear of the building or on the side behind the midpoint.

With these conditions, staff finds that the proposal will meet the design guidelines for new construction in the Belmont-Hillsboro Neighborhood Conservation Zoning Overlay.

ATTACHMENT A: CONTEXT PHOTOGRAPHS



1920 Blair Boulevard. Thirty-two foot (32') wide structure on a fifty foot (50') wide lot.




1918 Blair Boulevard. Thirty foot (30') wide structure on a fifty foot (50') wide lot.



1916 Blair Boulevard. Thirty-nine foot (39') wide structure on a fifty-five foot (55') wide lot.



1913 Blair Boulevard. Fifty-two foot (52') wide structure on a seventy-five foot (75') wide lot.

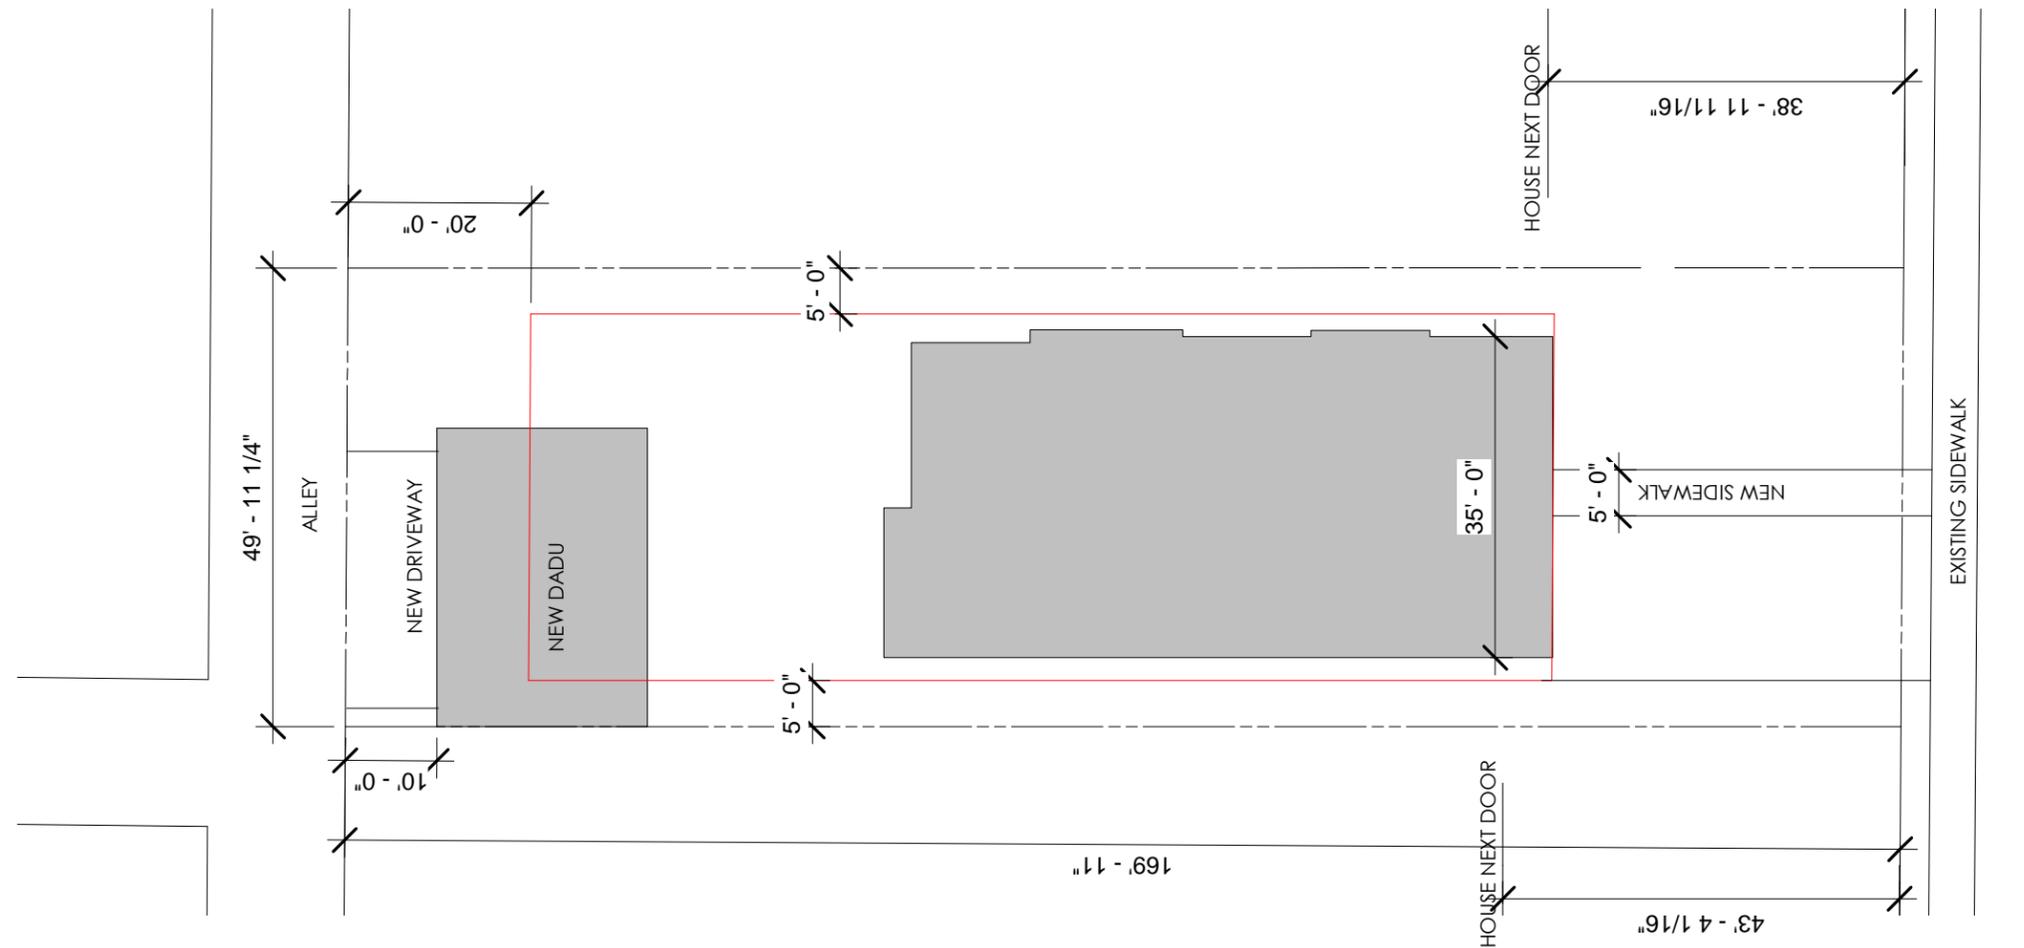

BLAIR



1906 BLAIR BLVD.

SITE PLAN

PROJECT MANAGER:
TELEPHONE EXT.
e-mail:

In Association with:

Project Manager:

e-mail:

Project Manager:

e-mail:

| AREA SCHEDULE | |
|----------------|---------|
| NAME | AREA |
| 2ND FLOOR | 1916 SF |
| 1ST FLOOR | 2027 SF |
| DADU | 729 SF |
| BASEMENT | 879 SF |
| Grand total: 4 | 5551 SF |

| MARK | ROOM NAME | SIZE | DOOR TYPE |
|-------|----------------|--------------------|-----------|
| 200CC | KITCHEN/LIVING | 2'-8"x8'-0" | |
| 200DD | BEDROOM | 2'-8"x8'-0" | |
| 200E | 3 CAR GARAGE | 16' x 8' | |
| 200EE | KITCHEN/LIVING | 2'-8"x8'-0" | |
| 200F | 3 CAR GARAGE | 9' x 8' | |
| 200FF | BEDROOM | 2'-4"x8'-8" | |
| 200GG | BATH | 2'-4"x6'-8" | |
| 200HH | | 2'-8"x8'-0" | |
| 200J | | 2'-8"x8'-0" | |
| 200K | | 2'-8"x8'-0" | |
| 200P | | 2'-8"x8'-0" | |
| 200Q | STORAGE | 2'-8"x8'-0" | |
| | M. BATH | Shower Glass Door | |
| 101A | OFFICE | 3'-0"x8'-0" | |
| 104A | DINING | 3'-6" X 8'-0" C.O. | |
| 104B | | 2'-4"x8'-0" | |
| 105 | KITCHEN | 3'-0"x8'-0" | |
| 106 | | 2'-8"x8'-0" | |
| 108A | M. BEDROOM | 2'-8"x8'-0" | |
| 108B | M. BEDROOM | PR 2'-6" x 8'-0" | FG |
| 109A | M. BATH | 3'-0"x8'-0" | |
| 109B | M. BATH | 2'-4"x8'-0" | |
| 110 | MASTER CLO. | 2'-8"x8'-0" | |
| 200 | LAUNDRY | 2'-8"x8'-0" | |
| 2000 | KITCHEN | 2'-8"x8'-0" | |
| 200AA | BONUS | 2'-4"x8'-0" | |
| 200BB | BEDROOM 3 | 2680 Pocket | |
| 200R | OFFICE | PR 3'-0" x 6'-8" | |
| 200S | BEDROOM 3 | 2'-8"x8'-0" | |
| 200T | BEDROOM 4 | 2'-8"x8'-0" | |
| 200U | OFFICE | 2'-4"x8'-0" | |
| 200V | LAUNDRY | 2'-8"x8'-0" | |
| 200W | BATH | 2'-4"x8'-0" | |
| 200X | BEDROOM 4 | 5'-0"x8'-0" | |
| 200Y | BEDROOM 2 | 2'-8"x8'-0" | |
| 200Z | BONUS | 2'-0"x8'-0" | |
| 203 | BATH | 2'-4"x8'-0" | |
| 204 | W.I.C. | 2'-4"x8'-0" | |
| 208 | | 2'-4"x8'-0" | |

| WINDOW SCHEDULE | | | |
|-----------------|---------------------------|-------|----------|
| Type Mark | Type | Count | Comments |
| A | Single Hung 36" x 60" | 10 | |
| B | Double Hung 2'-6" x 5'-0" | 4 | |
| C | Single Hung 36" x 72" | 4 | |
| D | Double Hung 2'-6" x 6'-0" | 20 | |
| E | Single Hung 24" x 42" | 1 | |
| F | Fixed 30" x 48" | 4 | |
| G | Fixed 54" x 54" | 1 | |
| H | 30" x 30" | 6 | |
| J | LOUVRE 8" X 36" | 2 | |

1906 BLAIR
PERMIT DOCUMENT SUBMITTAL
NASHVILLE TN

THESE DRAWINGS ARE FOR DESIGN INTENT ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE CONSTRUCTION MEETS OR EXCEEDS ALL APPLICABLE CODES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE ALL MECHANICAL, ELECTRICAL, PLUMBING, AND STRUCTURAL SYSTEMS WITH THE FRAMEWORK AND AESTHETICS OF THIS HOUSE.


Sheet Information
Date: 06/24/2020
Job Number: 000000
Drawn By: Author
Checked By: Checker
Approved By: Approver

THESE DOCUMENTS ARE THE PROPERTY OF JENNER DESIGN, INC. AND SHALL NOT BE REPRODUCED WITHOUT EXPRESSED WRITTEN CONSENT OF JENNER DESIGN, INC.

© JENNERDESIGN, INC. 2016

Sheet Description:
1ST FLOOR PLAN

Sheet:
A101

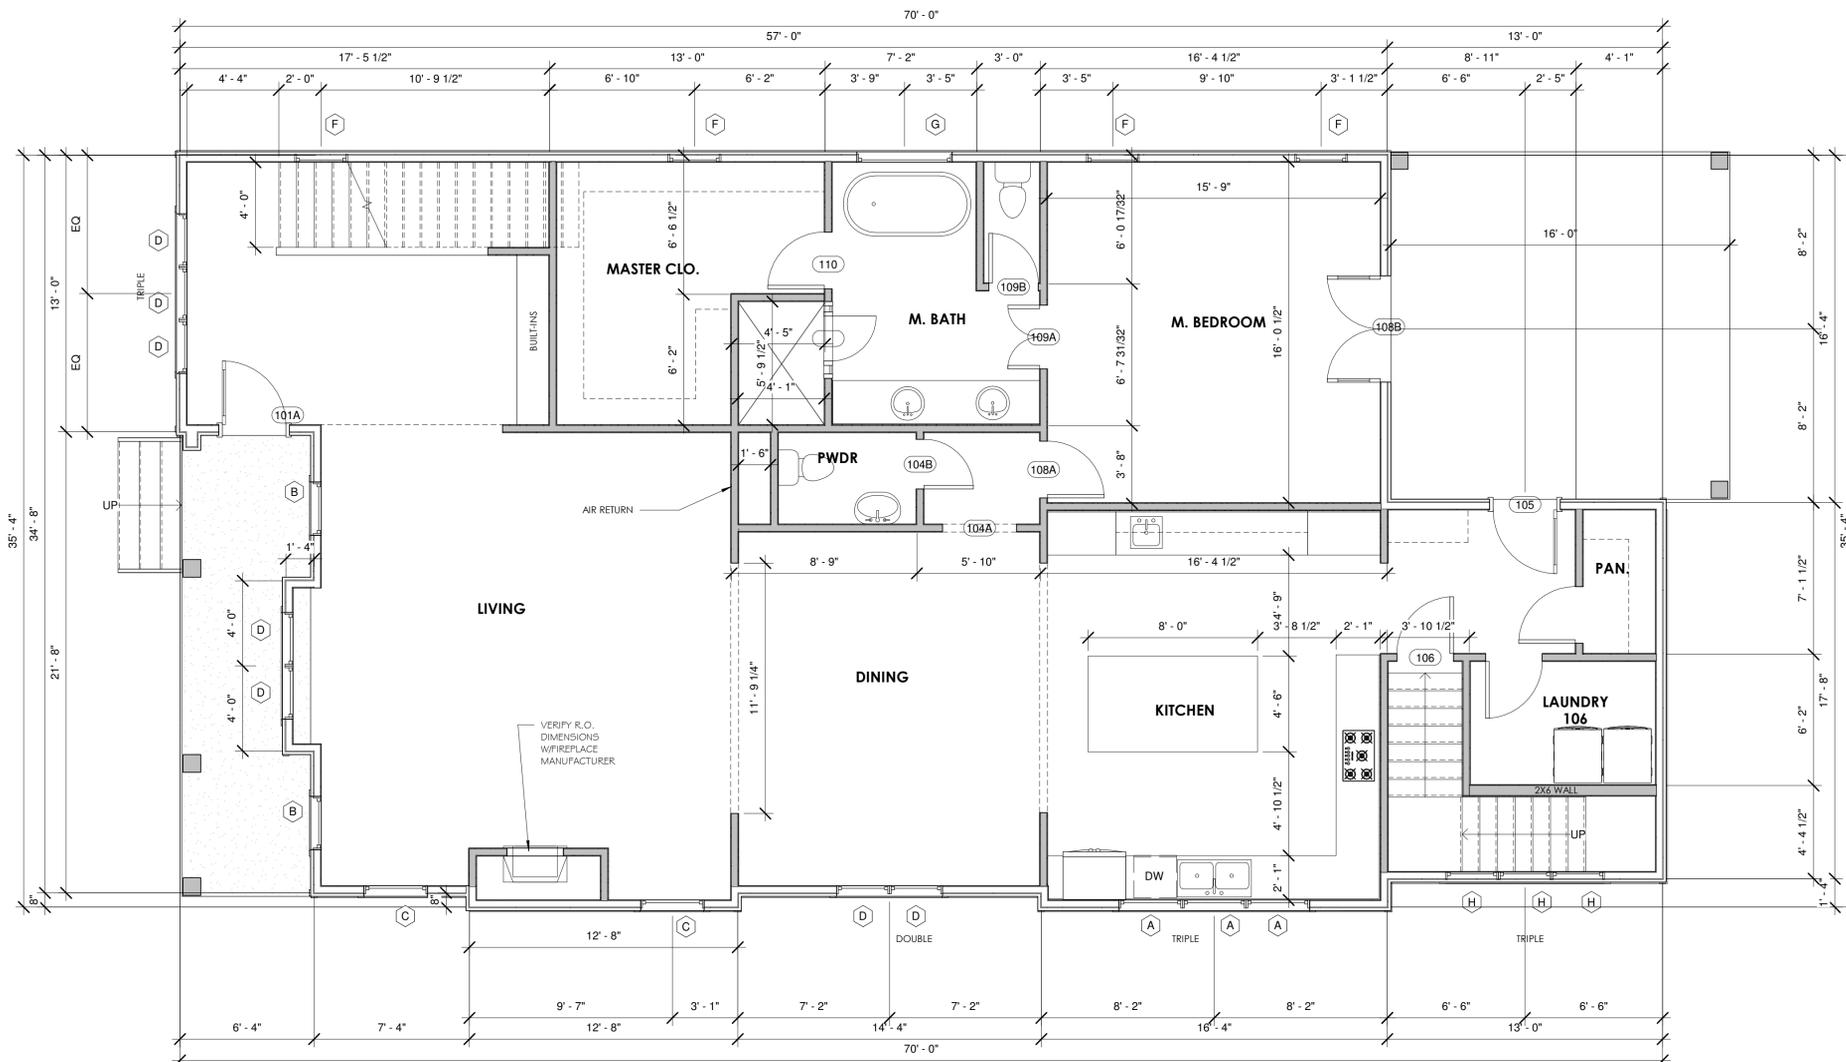


1 MAIN FLOOR PLAN
1/4" = 1'-0"

| AREA SCHEDULE | |
|---------------|------|
| NAME | AREA |

| | |
|----------------|---------|
| 2ND FLOOR | 1916 SF |
| 1ST FLOOR | 2027 SF |
| DADU | 729 SF |
| BASEMENT | 879 SF |
| Grand total: 4 | 5551 SF |

| MARK | ROOM NAME | SIZE | DOOR TYPE |
|---------|-------------------|--------------------|-----------|
| 200CC | KITCHEN/LIVING | 2'-8"x8'-0" | |
| 200DD | BEDROOM | 2'-8"x8'-0" | |
| 200E | 3 CAR GARAGE | 16' x 8' | |
| 200EE | KITCHEN/LIVING | 2'-8"x8'-0" | |
| 200F | 3 CAR GARAGE | 9' x 8' | |
| 200FF | BEDROOM | 2'-4"x6'-8" | |
| 200GG | BATH | 2'-4"x6'-8" | |
| 200HH | | 2'-8"x8'-0" | |
| 200I | | 2'-8"x8'-0" | |
| 200K | | 2'-8"x8'-0" | |
| 200P | | 2'-8"x8'-0" | |
| 200Q | STORAGE | 2'-8"x8'-0" | |
| M. BATH | Shower Glass Door | | |
| 101A | OFFICE | 3'-0"x8'-0" | |
| 104A | DINING | 3'-6" X 8'-0" C.O. | |
| 104B | | 2'-4"x8'-0" | |
| 105 | KITCHEN | 3'-0"x8'-0" | |
| 106 | | 2'-8"x8'-0" | |
| 108A | M. BEDROOM | 2'-8"x8'-0" | |
| 108B | M. BEDROOM | PR 2'-6" x 8'-0" | FG |
| 109A | M. BATH | 3'-0"x8'-0" | |
| 109B | M. BATH | 2'-4"x8'-0" | |
| 110 | MASTER CLO. | 2'-8"x8'-0" | |
| 200 | LAUNDRY | 2'-8"x8'-0" | |
| 200C | KITCHEN | 2'-8"x8'-0" | |
| 200AA | BONUS | 2'-4"x8'-0" | |
| 200BB | BEDROOM 3 | 2680 Pocket | |
| 200R | OFFICE | PR 3'-0" x 6'-8" | |
| 200S | BEDROOM 3 | 2'-8"x8'-0" | |
| 200T | BEDROOM 4 | 2'-8"x8'-0" | |
| 200U | OFFICE | 2'-4"x8'-0" | |
| 200V | LAUNDRY | 2'-8"x8'-0" | |
| 200W | BATH | 2'-4"x8'-0" | |
| 200X | BEDROOM 4 | 5'-0"x8'-0" | |
| 200Y | BEDROOM 2 | 2'-8"x8'-0" | |
| 200Z | BONUS | 2'-0"x8'-0" | |
| 203 | BATH | 2'-4"x8'-0" | |
| 204 | W.I.C. | 2'-4"x8'-0" | |
| 208 | | 2'-4"x8'-0" | |

| Type Mark | Type | Count | Comments |
|-----------|--------------------------|-------|----------|
| A | Single Hung 36" x 60" | 10 | |
| B | Double Hung 2'-6"x 5'-0" | 4 | |
| C | Single Hung 36" x 72" | 4 | |
| D | Double Hung 2'-6"x6'-0" | 20 | |
| E | Single Hung 24" x 42" | 1 | |
| F | Fixed 30" x 48" | 4 | |
| G | Fixed 54" x 54" | 1 | |
| H | 30" x 30" | 6 | |
| J | LOUVRE 8" X 36" | 2 | |

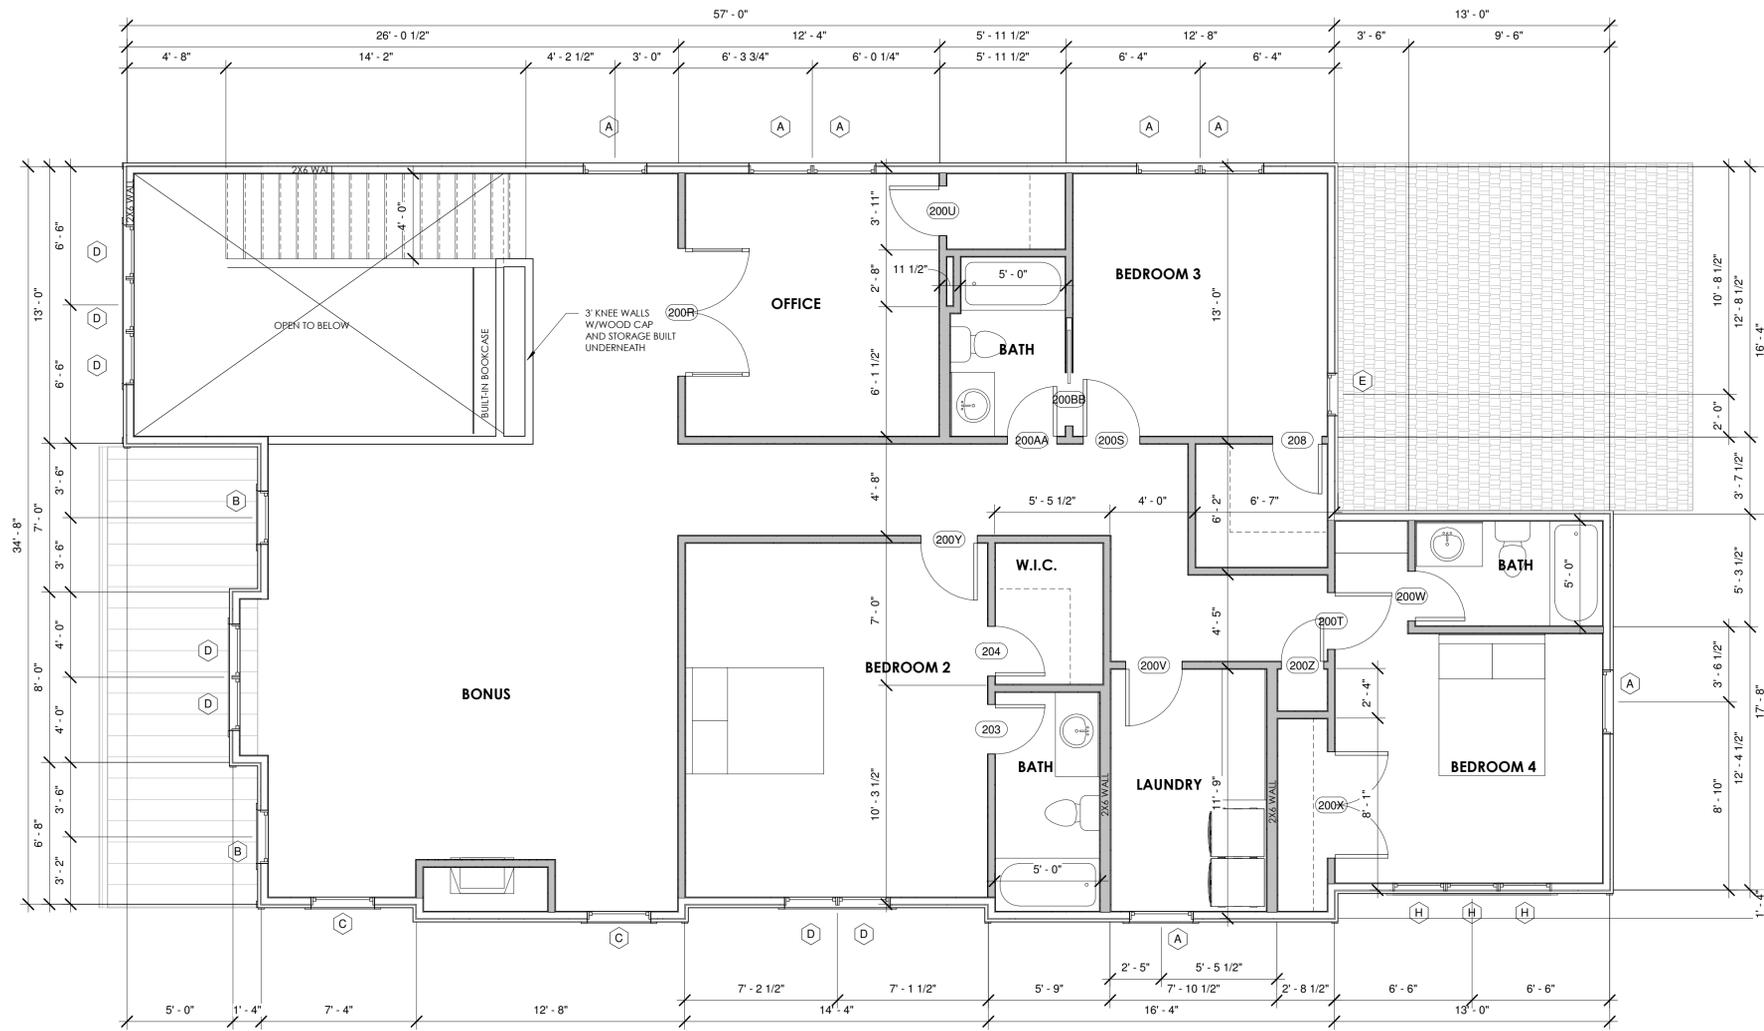

1 UPPER FLOOR PLAN
1/4" = 1'-0"

1906 BLAIR
PERMIT DOCUMENT SUBMITTAL
NASHVILLE TN

THESE DRAWINGS ARE FOR
DESIGN INTENT ONLY
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO
ENSURE CONSTRUCTION MEETS OR
EXCEEDS ALL
APPLICABLE CODES
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO COORDINATE
ALL MECHANICAL, ELECTRICAL,
PLUMBING, AND STRUCTURAL
SYSTEMS WITH THE FRAMEWORK
AND AESTHETICS OF THIS HOUSE.

| Sheet Information | |
|-------------------|------------|
| Date : | 06/24/2020 |
| Job Number : | 000000 |
| Drawn By : | Author |
| Checked By : | Checker |
| Approved By : | Approver |

THESE DOCUMENTS ARE THE PROPERTY OF
JENNER DESIGN, INC. AND SHALL NOT BE
REPRODUCED WITHOUT EXPRESSED
WRITTEN CONSENT OF JENNER DESIGN, INC.

© JENNERDESIGN, INC. 2016

Sheet Description:
2ND FLOOR PLAN

Sheet:
A102

PROJECT MANAGER:
TELEPHONE EXT:
e-mail:


In Association with:

Project Manager:

e-mail:

Project Manager:

e-mail:

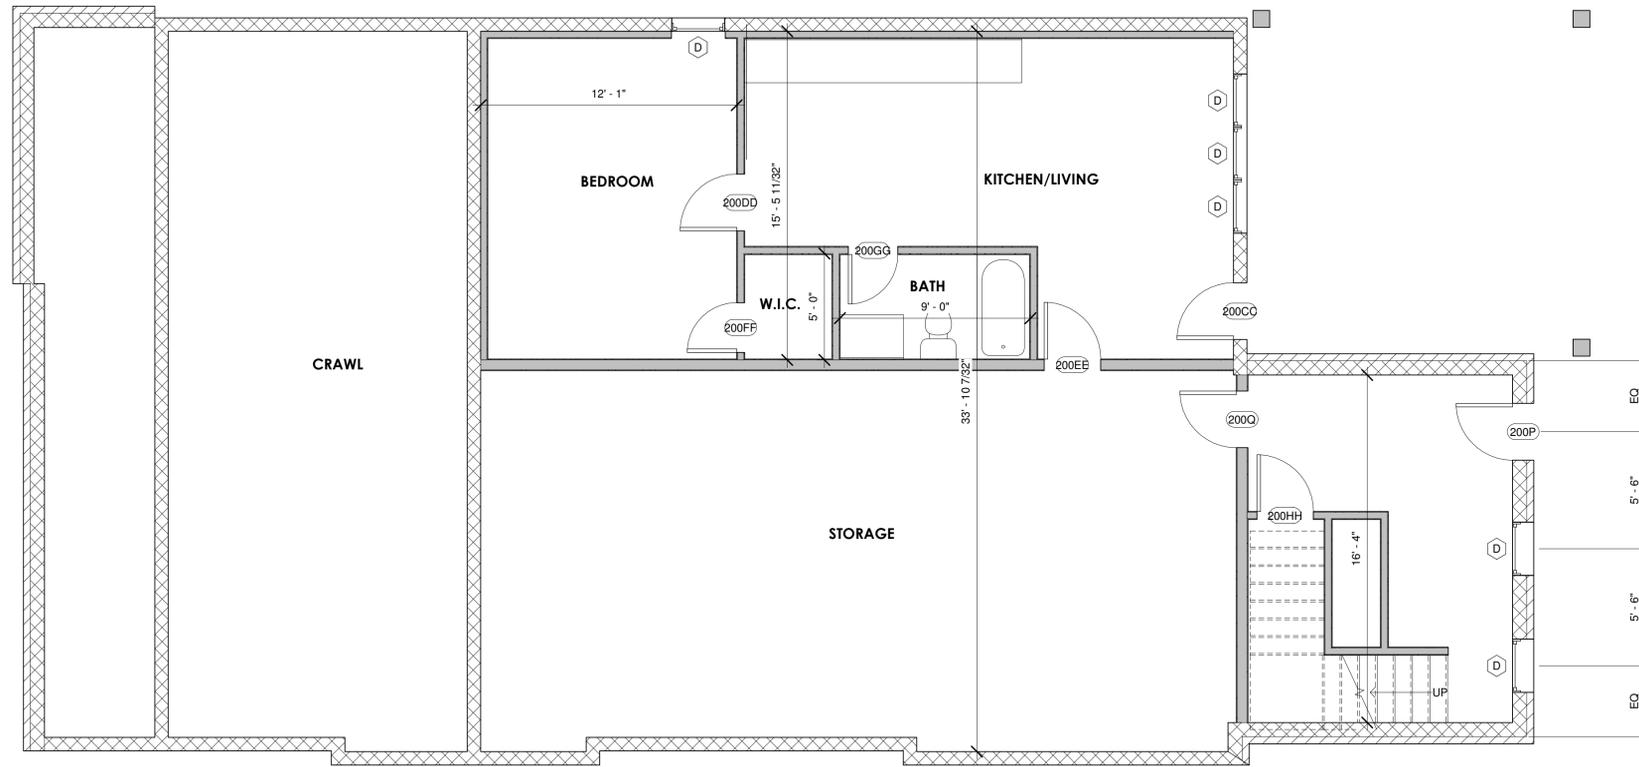

1 BASEMENT FLOOR
1/4" = 1'-0"

1906 BLAIR
PERMIT DOCUMENT SUBMITTAL
NASHVILLE TN

THESE DRAWINGS ARE FOR
DESIGN INTENT ONLY
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO
ENSURE CONSTRUCTION MEETS OR
EXCEEDS ALL
APPLICABLE CODES
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO COORDINATE
ALL MECHANICAL, ELECTRICAL,
PLUMBING, AND STRUCTURAL
SYSTEMS WITH THE FRAMEWORK
AND AESTHETICS OF THIS HOUSE.

| Sheet Information | |
|-------------------|------------|
| Date : | 06/24/2020 |
| Job Number : | 000000 |
| Drawn By : | Author |
| Checked By : | Checker |
| Approved By : | Approver |

THESE DOCUMENTS ARE THE PROPERTY OF
JENNER DESIGN, INC. AND SHALL NOT BE
REPRODUCED WITHOUT EXPRESSED
WRITTEN CONSENT OF JENNER DESIGN, INC.

© JENNERDESIGN, INC. 2016

Sheet Description:
FOUNDATION PLAN

Sheet:
A103

PROJECT MANAGER:
TELEPHONE EXT:
e-mail:

In Association with:

Project Manager:

e-mail:

Project Manager:

e-mail:



1 FRONT ELEVATION
1/4" = 1'-0"



| WINDOW SCHEDULE | | | |
|-----------------|---------------------------|-------|----------|
| Type Mark | Type | Count | Comments |
| A | Single Hung 36" x 60" | 10 | |
| B | Double Hung 2'-6" x 5'-0" | 4 | |
| C | Single Hung 36" x 72" | 4 | |
| D | Double Hung 2'-6" x 6'-0" | 20 | |
| E | Single Hung 24" x 42" | 1 | |
| F | Fixed 30" x 48" | 4 | |
| G | Fixed 54" x 54" | 1 | |
| H | 30" x 30" | 6 | |
| J | LOUVRE 8" X 36" | 2 | |

1906 BLAIR
PERMIT DOCUMENT SUBMITTAL
NASHVILLE TN

THESE DRAWINGS ARE FOR
DESIGN INTENT ONLY
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO
ENSURE CONSTRUCTION MEETS OR
EXCEEDS ALL
APPLICABLE CODES
IT IS THE CONTRACTOR'S
RESPONSIBILITY TO COORDINATE
ALL MECHANICAL, ELECTRICAL,
PLUMBING, AND STRUCTURAL
SYSTEMS WITH THE FRAMEWORK
AND AESTHETICS OF THIS HOUSE.

Sheet Information

Date : 06/24/2020
Job Number : 000000
Drawn By : Author
Checked By : Checker
Approved By : Approver

THESE DOCUMENTS ARE THE PROPERTY OF
JENNER DESIGN, INC. AND SHALL NOT BE
REPRODUCED WITHOUT EXPRESSED
WRITTEN CONSENT OF JENNER DESIGN, INC.


© JENNERDESIGN, INC. 2016

Sheet Description:
ELEVATIONS

Sheet:
A200



3 3D View 3

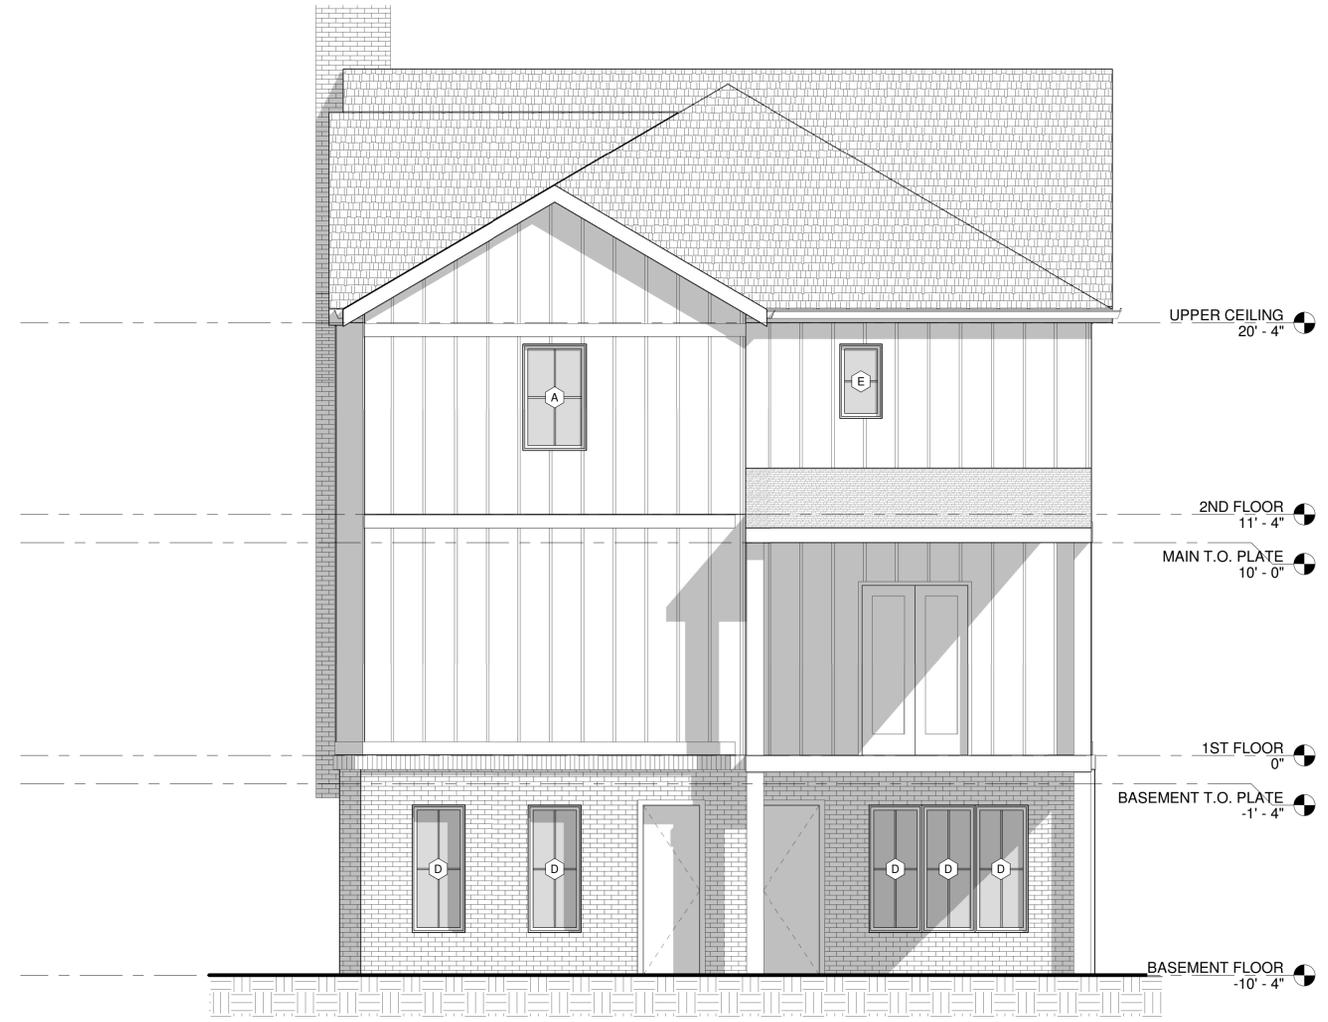

2 REAR ELEVATION
1/4" = 1'-0"



1 RIGHT ELEVATION
1/4" = 1'-0"

| WINDOW SCHEDULE | | | |
|-----------------|---------------------------|-------|----------|
| Type Mark | Type | Count | Comments |
| A | Single Hung 36" x 60" | 10 | |
| B | Double Hung 2'-6" x 5'-0" | 4 | |
| C | Single Hung 36" x 72" | 4 | |
| D | Double Hung 2'-6" x 6'-0" | 20 | |
| E | Single Hung 24" x 42" | 1 | |
| F | Fixed 30" x 48" | 4 | |
| G | Fixed 54" x 54" | 1 | |
| H | 30" x 30" | 6 | |
| J | LOUVRE 8" X 36" | 2 | |

1906 BLAIR
PERMIT DOCUMENT SUBMITTAL
NASHVILLE TN

THESE DRAWINGS ARE FOR DESIGN INTENT ONLY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE CONSTRUCTION MEETS OR EXCEEDS ALL APPLICABLE CODES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE ALL MECHANICAL, ELECTRICAL, PLUMBING, AND STRUCTURAL SYSTEMS WITH THE FRAMEWORK AND AESTHETICS OF THIS HOUSE.

Sheet Information

| | |
|--------------|------------|
| Date: | 06/24/2020 |
| Job Number: | 000000 |
| Drawn By: | Author |
| Checked By: | Checker |
| Approved By: | Approver |

THESE DOCUMENTS ARE THE PROPERTY OF JENNER DESIGN, INC. AND SHALL NOT BE REPRODUCED WITHOUT EXPRESSED WRITTEN CONSENT OF JENNER DESIGN, INC.
© JENNERDESIGN, INC. 2016

Sheet Description:
ELEVATIONS

Sheet:
A201



UPPER CEILING
20' - 4"

2ND FLOOR
11' - 4"

MAIN T.O. PLATE
10' - 0"

1ST FLOOR
0"

BASEMENT T.O. PLATE
-1' - 4"

BASEMENT FLOOR
-10' - 4"