

Activity: Extended Detention

Extended Detention

Description: Constructed stormwater detention basin that has a permanent pool (or micropool). Runoff from each rain event is captured and treated primarily through settling and biological uptake mechanisms.

Variations: Wet extended detention, micropool extended detention, multiple pond system



Components:

- Permanent pool / micropool – prevents re-suspension of solids
- Live storage above permanent pool – sized for a percentage of water quality volume and flow attenuation.
- Forebay – settles out larger sediments in an area where sediment removal will be easier
- Spillway system – spillway system(s) provides outlet for stormwater runoff when large storm events occur and maintains the permanent pool

Advantages/Benefits:

- Can be designed as a multi-functional SCM
- Cost effective
- Can be designed as an amenity within a development
- Wildlife habitat potential
- High community acceptance when integrated into a development

Disadvantages/Limitations:

- Potential for thermal impacts downstream
- Not recommended in karst terrain
- Community perceived concerns with mosquitoes and safety

Design considerations:

- Minimum contributing drainage area of 25 acres; 10 acres for micropool extended detention (Unless water balance calculations show support of permanent pool by a smaller drainage area)
- Sediment forebay or equivalent pretreatment must be provided
- Minimum length to width ratio = 3:1
- Maximum depth of permanent pool = 4'
- 3:1 side slopes or flatter around pond perimeter

Runoff Reduction Credit:

15% for design specified
0% if lined

Land Use Considerations:

- Residential
- Commercial
- Industrial

Maintenance:

- Remove debris from inlet and outlet structures
- Maintain side slopes/remove invasive vegetation
- Monitor sediment accumulation and remove periodically

Maintenance Burden
L = Low M = Moderate H = High

Activity: Extended Detention

SECTION 1: DESCRIPTION

An Extended Detention (ED) Pond relies on 24 to 48 hour detention of stormwater runoff after each rain event. An under-sized outlet structure restricts stormwater flow so it backs up and is stored within the basin. The temporary ponding enables particulate pollutants to settle out and reduces the maximum peak discharge to the downstream channel, thereby reducing the effective shear stress on banks of the receiving stream. ED differs from stormwater detention, since it is designed to achieve a minimum drawdown time, rather than a maximum peak rate of flow (which is commonly used to design for peak discharge or flood control purposes and often detains flows for just a few minutes or hours). ED ponds rely on gravitational settling as their primary pollutant removal mechanism. Consequently, they generally provide fair-to-good removal for particulate pollutants, but low or negligible removal for soluble pollutants, such as nitrate and soluble phosphorus. The use of ED alone generally results in a low overall pollutant removal. As a result, ED is normally combined with other practices to maximize pollutant removal rates.

SECTION 2: PERFORMANCE

Table 6.1. Runoff Volume Reduction Provided by ED Ponds	
Stormwater Function	Specified Design
Runoff Volume Reduction (RR)	15%

Sources: CSN (2008), CWP (2007)

SECTION 3: DESIGN TABLE

ED ponds must be designed with a Storage Volume, T_v . **Table 6.2** lists the criteria for qualifying designs. See **Section 6** for more detailed design guidelines.

Table 6.2. Extended Detention (ED) Pond Criteria
Specified Design (RR:15)
$T_v^1 = [(1.25) (R_v) (A)] * 3630$ – the volume reduced by an upstream SCM
A minimum of 40% of T_v in the permanent pool (forebay, micropool, deep pool, or wetlands)
Length/Width ratio <i>OR</i> flow path = 3:1 or more
Length of the shortest flow path / overall length = 0.7 or more
Minimum T_v ED time = 24 hours
Maximum vertical T_v ED limit of 4 feet
Trees and wetlands in the planting plan
Includes additional cells or features (deep pools, wetlands, etc.) Refer to Section 5
CDA is greater than 10 acres unless water balance supports smaller contributing drainage area (CDA)

¹ A= Area in Acres

Activity: Extended Detention

SECTION 4: TYPICAL DETAILS

Figure 6.1 portrays a typical schematic for an ED pond.

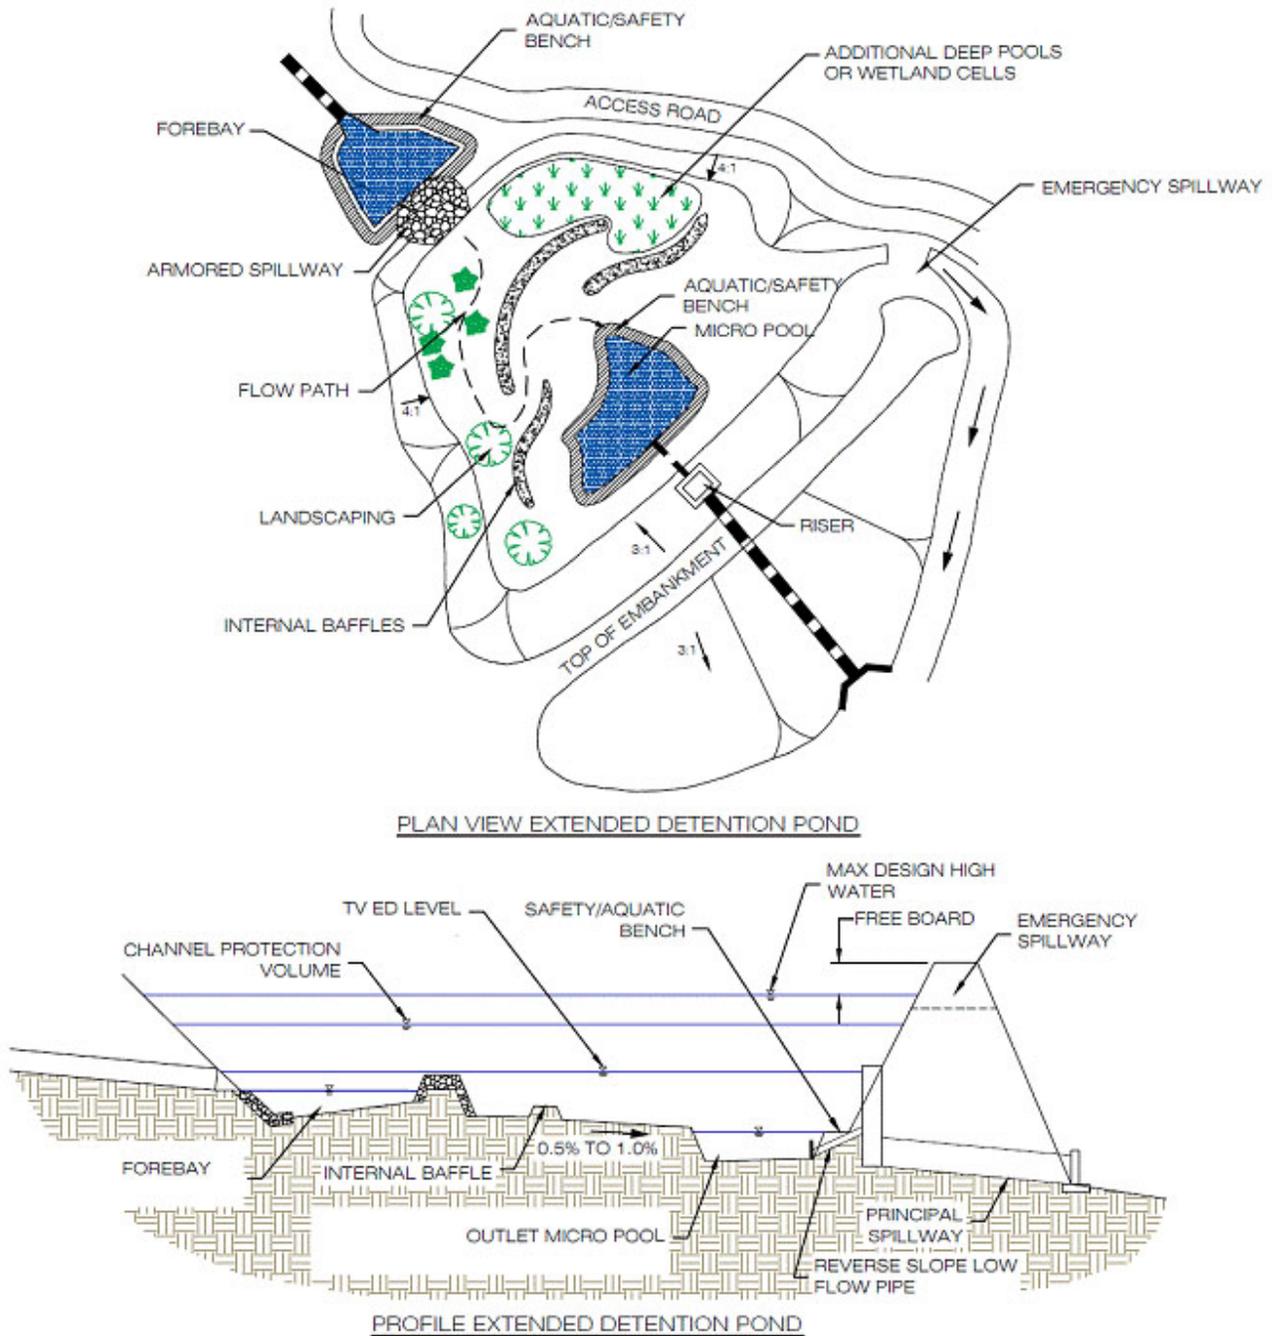


Figure 6.1. Typical Extended Detention Pond Details (source: VADCR, 2011)

Activity: Extended Detention

SECTION 5: PHYSICAL FEASIBILITY & DESIGN APPLICATIONS

The following feasibility issues need to be evaluated when ED ponds are considered as the final practice in a treatment train. Many of these issues will be influenced by the type of ED Pond being considered (refer to Design Applications at the end of this section).

Space Required. A typical ED pond requires a footprint of 1% to 3% of its contributing drainage area, depending on the depth of the pond (i.e., the deeper the pond, the smaller footprint needed).

Contributing Drainage Area. A minimum contributing drainage area of 10 acres is recommended for ED ponds in order to sustain a permanent micropool to protect against clogging. Extended detention may still work with drainage areas less than 10 acres, but designers should be aware that these “pocket” ponds will typically (1) have very small orifices that will be prone to clogging, (2) experience fluctuating water levels, and (3) generate more significant maintenance problems. Water balance calculations should also support a CDA less than 10 acres.

Available Hydraulic Head. The depth of an ED pond is usually determined by the amount of hydraulic head available at the site. The bottom elevation is normally the invert of the existing downstream conveyance system to which the ED pond discharges. Typically, a minimum of 6 to 10 feet of head is needed for an ED pond to function.

Minimum Setbacks. Local ordinances and design criteria should be consulted to determine minimum setbacks to property lines, structures, and wells. Generally, ED ponds should be set back at least 10 feet from property lines, 25 feet from building foundations, 50 feet from septic system fields, and 100 feet from private wells.

Depth-to-Water Table and Bedrock. If less than 3 feet of vertical separation exists between the bottom of the ED pond and the underlying soil-bedrock interface, ED ponds should not be used unless they have an acceptable liner.

Soils. The permeability of soils is seldom a design constraint for micropool ED ponds. Soil infiltration tests need to be conducted at proposed pond sites to estimate infiltration rates, which can be significant in Hydrologic Soil Group (HSG) A soils and some group B soils. Infiltration through the bottom of the pond is encouraged unless it will impair the integrity of the embankment. Geotechnical tests should be conducted to determine the infiltration rates and other subsurface properties of the soils underlying the proposed ED pond. If the site is on karst topography, an alternative practice or combination of practices should be employed at the site, if possible. See Technical bulletin No. 1 (CSN, 2009) for guidance on stormwater design in karst terrain. The Extended Detention Basin should be the option of last resort and, if used in karst, must have an impermeable clay or (preferably) geosynthetic liner.

Design Applications

Extended Detention is normally combined with other stormwater treatment options within the stormwater facility (e.g., wet ponds, and constructed wetlands) to enhance its performance and appearance. Other design variations are also possible where a portion of the runoff is directed to bioretention, infiltration, etc., that are within the overall footprint but housed in a separate cell, where the ponding depth of the Tv and/or flood protection storage is limited by the criteria of that particular practice.

While ED ponds can provide for flood protection, they will rarely provide adequate runoff volume reduction and pollutant removal to serve as a stand-alone compliance strategy. Therefore, designers should always maximize the use of upland runoff reduction practices, (e.g., rooftop disconnections, small-scale infiltration, rainwater harvesting, bioretention, grass channels and water quality swales) that reduce runoff at its source (rather than merely treating the runoff at the terminus of the storm drain system). Upland runoff reduction practices can be used to satisfy most or all of the runoff reduction requirements at most sites. Upland runoff reduction practices will greatly reduce the size, footprint and cost of the downstream ED pond.

Activity: Extended Detention

SECTION 6: DESIGN CRITERIA

6.1 Overall Sizing

Designers can use a site-adjusted R_v (see **Chapter 3.2** of **Volume 5** for appropriate equations), which reflects the use of upland runoff reduction practices, to compute the remaining treatment and flood protection volumes that must be treated by the ED pond. ED ponds should then be designed to capture and treat the remaining runoff volume as necessary, using methodology found below and in **Volume 4 PTP-06**. Runoff treatment (T_v) credit may be taken for the entire water volume below the permanent pool elevation of any micropools, forebays and wetland areas, as well as, the temporary extended detention above the normal pool. A minimum of 40% of the T_v must be designed into the permanent pool.

Equation 6.1. ED Treatment Volume

$$T_v \text{ (cu. ft.)} = (\text{Original } T_v - \text{the volume reduced by an upstream SCM})$$

After calculating T_v , the forebay should be sized using guidance in **Section 6.4**.

The outlets must then be sized for appropriate storm events. If the pond is additionally going to address peak flow attenuation, the downstream impacts must be considered for the 2-through 100-year events. Refer to **Volume 4 PTP-01** and **Volume 2 Chapter 8** for instruction on design of outlet orifices and weirs.

6.2 Treatment Volume Drawdown and Detention Design

Low flow orifices can be sized using the following equation, as provided in **Volume 4 PTP-06**. For more information on the design of outlet orifices and weirs and for achieving the target drawdown of the Treatment Volume design, refer to **Volume 2 Chapter 8**. If different equation is used or different type of low flow orifice is used, provide supporting calculations.

Equation 6.2. Area of Low Flow Orifice

$$a = \frac{2A(H - H_o)^{0.5}}{3600CT(2g)^{0.5}}$$

Where:

a	=	Area of orifice (ft ²)
A	=	Average surface area of the pond (ft ²)
C	=	Orifice coefficient, 0.66 for thin, 0.80 for materials thicker than orifice diameter
T	=	Drawdown time of pond (hrs), must be greater than 24 hours
g	=	Gravity (32.2 ft/sec ²)
H	=	Elevation when pond is full to storage height (ft)
H _o	=	Final elevation when pond is empty (ft)

Table 6.2 provides maximum ponding depths and other criteria for providing runoff volume reduction.

Once the low flow orifice has been sized, design embankments and emergency spillways, investigate potential dam hazard classifications, and finally design inlets, sediment forebays, outlet structures, maintenance access, and safety features. These items are detailed in both Section 6.5, below, and Volume 4 PTP-06.

Activity: Extended Detention

6.3 Required Geotechnical Testing

Soil borings should be taken below the proposed embankment, in the vicinity of the proposed outlet area, and in at least two locations within the proposed ED pond treatment area. Soil boring data is needed to (1) determine the physical characteristics of the excavated material, (2) determine its adequacy for use as structural fill or spoil, (3) provide data for structural designs of the outlet works (e.g., bearing capacity and buoyancy), (4) determine compaction/composition needs for the embankment, (5) determine the depth to groundwater and bedrock and (6) evaluate potential infiltration losses (and the potential need for a liner).

6.4 Pretreatment Forebay

Sediment forebays are considered to be an integral design feature to maintain the longevity of ED ponds. A forebay must be located at each major inlet to trap sediment and preserve the capacity of the main treatment cell. Other forms of pre-treatment for sheet flow and concentrated flow for minor inflow points should be designed consistent with pretreatment criteria found in **GIP-01 Bioretention**. The following criteria apply to forebay design:

- A major inlet is defined as an individual storm drain inlet pipe or open channel serving at least 10% of the ED pond's contributing drainage area.
- The forebay consists of a separate cell, formed by an acceptable barrier. (e.g., an earthen berm, concrete weir, gabion baskets, etc.).
- The forebay should be at least 4 feet deep and must be equipped with a variable width aquatic bench for safety purposes. The aquatic benches should be 4 to 6 feet wide at a depth of 18 inches below the water surface.
- The total volume of all forebays should be at least 15% of the total Treatment Volume. The relative size of individual forebays should be proportional to the percentage of the total inflow to the pond. Similarly, any outlet protection associated with the end section or end wall should be designed according to state or local design standards.
- The forebay should be designed in such a manner that it acts as a level spreader to distribute runoff evenly across the entire bottom surface area of the main treatment cell.
- The bottom of the forebay may be hardened (e.g., concrete, asphalt, or grouted riprap) in order to make sediment removal easier.

6.5 Conveyance and Overflow

No Pilot Channels. Micropool ED ponds shall not have a low flow pilot channel, but instead must be constructed in a manner whereby flows are evenly distributed across the pond bottom, to promote the maximum infiltration possible.

Internal Slope. The maximum longitudinal slope through the pond should be approximately 0.5% to 1% to promote positive flow through the ED pond.

Primary Spillway. The primary spillway shall be designed with acceptable anti-flotation, anti-vortex, and trash rack devices. The spillway must generally be accessible from dry land.

Non-Clogging Low Flow Orifice. ED Ponds with drainage areas of 10 acres or less, where small diameter pipes are typical, are prone to chronic clogging by organic debris and sediment. Orifices less than 3 inches in diameter may require extra attention during design to minimize the potential for clogging. Designers should always look at upstream conditions to assess the potential for higher sediment and woody debris loads. The risk of clogging in outlet pipes with small orifices can be reduced by:

Activity: Extended Detention

- Providing a micropool at the outlet structure:
 - Use a reverse-sloped pipe that extends to a mid-depth of the permanent pool or micropool.
 - Install a downturned elbow or half-round CMP over a riser orifice (circular, rectangular, V-notch, etc.) to pull water from below the micropool surface.
 - The depth of the micropool should be at least 4 feet deep, and the depth may not draw down by more than 2 feet during 30 consecutive days of dry weather in the summer.
- Providing an over-sized forebay to trap sediment, trash and debris before it reaches the ED pond's low-flow orifice.
- Installing a trash rack to screen the low-flow orifice.
- Using a perforated pipe under a gravel blanket with an orifice control at the end in the riser structure to supplement the primary outlet.

Emergency Spillway. ED ponds must be constructed with overflow capacity to pass the 100-year design storm event through either the Primary Spillway or a vegetated or armored Emergency Spillway.

Adequate Outfall Protection. The design must specify an outfall that will be stable for the 10- year design storm event. The channel immediately below the pond outfall must be modified to prevent erosion and conform to natural dimensions in the shortest possible distance. This is typically done by placing appropriately sized riprap, over filter fabric, which can reduce flow velocities from the principal spillway to non-erosive levels (3.5 to 5.0 fps depending on the channel lining material). Flared pipe sections that discharge at or near the stream invert or into a step pool arrangement should be used at the spillway outlet.

Inlet Protection. Inlet areas should be stabilized to ensure that non-erosive conditions exist during storm events up to the overbank flood event (i.e., the 10-year storm event). Inlet pipe inverts should generally be located at or slightly below the forebay pool elevation.

On-Line ED Ponds must be designed to detain the required T_v and either manage or be capable of safely passing larger storm events conveyed to the pond (e.g., 10-year flood protection, and/or the 100-year design storm event).

6.6. Internal Design Features

Side Slopes. Side slopes leading to the ED pond should generally have a gradient of 4H:1V to 5H:1V. The mild slopes promote better establishment and growth of vegetation and provide for easier maintenance and a more natural appearance.

Long Flow Path. ED pond designs should have an irregular shape and a long flow path from inlet to outlet to increase water residence time, treatment pathways, and pond performance. In terms of flow path geometry, there are two design considerations: (1) the overall flow path through the pond, and (2) the length of the shortest flow path (Hirschman et al., 2009):

- The overall flow path can be represented as the length-to-width ratio OR the flow path. These ratios must be at least 3L:1W. Internal berms, baffles, or topography can be used to extend flow paths and/or create multiple pond cells.
- The shortest flow path represents the distance from the closest inlet to the outlet. The ratio of the shortest flow to the overall length must be at least 0.7. In some cases – due to site geometry, storm sewer infrastructure, or other factors – some inlets may not be able to meet these ratios. However, the drainage area served by these “closer” inlets should constitute no more than 20% of the total contributing drainage area.

Treatment Volume Storage. The total T_v storage may be provided by a combination of the permanent pool (in the form of forebays, deep pools, and/or wetland area) and extended detention storage.

Activity: Extended Detention

Vertical Extended Detention Limits. The maximum T_v ED water surface elevation may not extend more than 4 feet above the basin floor or normal pool elevation. The maximum vertical elevation for ED detention over shallow wetlands is 1 foot. Frequent fluctuations in water elevations, or bounce effect, are not as critical for larger flood control storms (e.g., the 10-year design storm), and these events can exceed the 4 foot vertical limit if they are managed by a multi-stage outlet structure.

Safety Features.

- The principal spillway opening must be designed and constructed to prevent access by small children.
- End walls above pipe outfalls greater than 48 inches in diameter must be fenced to prevent a hazard.
- An emergency spillway and associated freeboard must be provided in accordance with applicable local or state dam safety requirements. The emergency spillway must be located so that downstream structures will not be impacted by spillway discharges.
- Both the safety bench and the aquatic bench should be landscaped with vegetation that hinders or prevents access to the pool.

6.7 Landscaping and Planting Plan

A landscaping plan must be provided that indicates the methods used to establish and maintain vegetative coverage within the ED pond. Minimum elements of a plan include the following:

- Delineation of pond-scaping zones within the pond
- Selection of corresponding plant species
- The planting plan
- The sequence for preparing the wetland bed, if one is incorporated with the ED pond (including soil amendments, if needed)
- Sources of plant material
- The planting plan should allow the pond to mature into a native forest in the right places, but yet keep mowable turf along the embankment and all access areas. The wooded wetland concept proposed by Cappiella *et al.*, (2005) may be a good option for many ED ponds.
- Woody vegetation may not be planted or allowed to grow within 15 feet of the toe of the embankment nor within 25 feet from the principal spillway structure.
- Avoid species that require full shade, or are prone to wind damage. Extra mulching around the base of trees and shrubs is strongly recommended as a means of conserving moisture and suppressing weeds.

For more guidance on planting trees and shrubs in ED ponds consult Cappiella et al (2006).

6.8 Maintenance Reduction Features

Good maintenance access is needed so crews can remove sediments from the forebay, alleviate clogging and make riser repairs. The following ED pond maintenance issues can be addressed during design, in order to make on-going maintenance easier:

- Adequate maintenance access must extend to the forebay, micropool, any safety benches, riser, and outlet structure and must have sufficient area to allow vehicles to turn around.
- The riser should be located within the embankment for maintenance access, safety and aesthetics.
- Access roads must (1) be constructed of load-bearing materials or be built to withstand the expected frequency of use, (2) have a minimum width of 12 feet, and (3) have a profile grade that does not exceed 15%. Steeper grades are allowable if appropriate stabilization techniques are used, such as a gravel road.
- A maintenance right-of-way or easement must extend to the ED pond from a public or private road.

Activity: Extended Detention

6.9 ED Pond Material Specifications

ED ponds are generally constructed with materials obtained on-site, except for the plant materials, inflow and outflow devices (e.g., piping and riser materials), possibly stone for inlet and outlet stabilization, and filter fabric for lining banks or berms.

The basic material specifications for earthen embankments, principal spillways, vegetated emergency spillways and sediment forebays shall be as specified in Tennessee state guidelines and PTP-06, Dry Ponds in Volume 4.

6.10 Dam Safety

Tennessee Safe Dams Act may apply to ponds with storage volumes and embankment heights large enough to fall under the regulation for dam safety, as applicable. Size emergency spillway for any overtopping of pond in case of rain event in excess of 100-year storm and for instances of malfunction or clogging of primary outlet structure.

SECTION 7: SPECIAL CASE DESIGN ADAPTATIONS

7.1 Steep Terrain

The use of ED ponds is highly constrained at development sites with steep terrain.

7.2 Karst Terrain

Karst is found in some areas of Metro Nashville. The presence of karst complicates both land development in general and stormwater design in particular. Designers should always conduct geotechnical investigations in karst terrain to assess this risk during the project planning stage. Because of the risk of sinkhole formation and groundwater contamination in karst regions, *use of ED ponds is highly restricted* (see CSN Technical Bulletin No. 1, 2009). If these studies indicate that less than 3 feet of vertical separation exists between the bottom of the ED pond and the underlying soil-bedrock interface, ED ponds should not be used unless they have an acceptable liner.

7.3 Multi-Functional Uses

Recreational and other uses may be provided between storm runoff events, as shown in **Figure 6.2**.



Figure 6.2. Multi-Use Dry Detention Doubling as Sports Fields Englewood, CO

Activity: Extended Detention

SECTION 8: CONSTRUCTION

8.1 Construction Sequence

The following is a typical construction sequence to properly install an ED pond. The steps may be modified to reflect different dry ED pond designs, site conditions, and the size, complexity and configuration of the proposed facility.

Step 1: Use of ED pond as an EPSC. An ED pond may serve as a sediment basin during project construction. If this is done, the volume should be based on the more stringent sizing rule (erosion and sediment control requirement vs. water quality treatment requirement). Installation of the permanent riser should be initiated during the construction phase, and design elevations should be set with final cleanout of the sediment basin and conversion to the post-construction ED pond in mind. The bottom elevation of the ED pond should be lower than the bottom elevation of the temporary sediment basin. Appropriate procedures should be implemented to prevent discharge of turbid waters when the basin is being converted into an ED pond.

Step 2: Stabilize the Drainage Area. ED ponds should only be constructed after the contributing drainage area to the pond is completely stabilized or if water is routed around them during construction. If the proposed pond site will be used as a sediment trap or basin during the construction phase, the construction notes should clearly indicate that the facility will be dewatered, dredged and re-graded to design dimensions after the original site construction is complete.

Step 3: Assemble Construction Materials on-site, make sure they meet design specifications, and prepare any staging areas.

Step 4: Clear and Strip the project area to the desired sub-grade.

Step 5: Install EPSC Controls prior to construction, including temporary de-watering devices and stormwater diversion practices. All areas surrounding the pond that are graded or denuded during construction must be planted with turf grass, native plantings, or other approved methods of soil stabilization.

Step 6: Excavate the Core Trench and Install the Spillway Pipe.

Step 7: Install the Riser or Outflow Structure and ensure the top invert of the overflow weir is constructed level at the design elevation.

Step 8: Construct the Embankment and any Internal Berms in 8 to 12-inch lifts and compact the lifts with appropriate equipment.

Step 9: Excavate/Grade until the appropriate elevation and desired contours are achieved for the bottom and side slopes of the ED pond.

Step 10: Construct the Emergency Spillway in cut or structurally stabilized soils.

Step 11: Install Outlet Pipes, including downstream rip-rap apron protection and/or channel armor, as necessary.

Step 12: Stabilize Exposed Soils with temporary seed mixtures appropriate for the pond. All areas above the normal pool elevation should be permanently stabilized by hydroseeding or seeding over straw.

Step 13: Plant the Pond Area, following the pond-scaping plan (see **Section 6.7**).

Activity: Extended Detention

8.2 Construction Inspection

Multiple inspections are critical to ensure that stormwater ponds are properly constructed. Inspections are recommended during the following stages of construction:

- Pre-construction meeting
- Initial site preparation (including installation of EPSC controls)
- Excavation/Grading (interim and final elevations)
- Installation of the embankment, the riser/primary spillway, and the outlet structure
- Implementation of the pond-scaping plan and vegetative stabilization
- Final inspection (develop a punch list for facility acceptance)

If the ED pond has a permanent pool, then to facilitate maintenance the contractor should measure the actual constructed pond depth at three areas within the permanent pool (forebay, mid-pond and at the riser), and they should mark and geo-reference them on an as-built drawing. This simple data set will enable maintenance inspectors to determine pond sediment deposition rates in order to schedule sediment cleanouts.

SECTION 9: MAINTENANCE

9.1 Maintenance Document

The requirements for the Maintenance Document are in Appendix C of Volume 1 of the Manual. They include the execution and recording of an Inspection and Maintenance Agreement or a Declaration of Restrictions and Covenants, and the development of a Long Term Maintenance Plan (LTMP) by the design engineer. The LTMP contains a description of the stormwater system components and information on the required inspection and maintenance activities. The property owner must submit annual inspection and maintenance reports to MWS.

9.2 Maintenance Inspections

Maintenance of ED ponds is driven by annual inspections that evaluate the condition and performance of the pond, including the following:

- Measure sediment accumulation levels in forebay.
- Monitor the growth of wetlands, trees and shrubs planted, and note the presence of any invasive plant species.
- Inspect the condition of stormwater inlets to the pond for material damage, erosion or undercutting.
- Inspect the banks of upstream and downstream channels for evidence of sloughing, animal burrows, boggy areas, woody growth, or gully erosion that may undermine embankment integrity.
- Inspect pond outfall channel for erosion, undercutting, rip-rap displacement, woody growth, etc.
- Inspect condition of principal spillway and riser for evidence of spalling, joint failure, leakage, corrosion, etc.
- Inspect condition of all trash racks, reverse sloped pipes or flashboard risers for evidence of clogging, leakage, debris accumulation, etc.
- Inspect maintenance access to ensure it is free of woody vegetation, and check to see whether valves, manholes and locks can be opened and operated.
- Inspect internal and external side slopes of the pond for evidence of sparse vegetative cover, erosion, or slumping, and make needed repairs immediately.

9.3 Common Ongoing Maintenance Issues

ED ponds are prone to a high clogging risk at the ED low-flow orifice. This component of the pond's plumbing should be inspected at least twice a year after initial construction. The constantly changing water levels in ED ponds

Activity: Extended Detention

make it difficult to mow or manage vegetative growth. The bottom of ED ponds often become soggy, and water-loving trees such as willows may take over. The maintenance plan should clearly outline how vegetation in the pond will be managed or harvested in the future.

The maintenance plan should schedule a cleanup at least once a year to remove trash and floatables that tend to accumulate in the forebay, micropool, and on the bottom of ED ponds.

Frequent sediment removal from the forebay is essential to maintain the function and performance of an ED pond. Maintenance plans should schedule cleanouts every 5 to 7 years, or when inspections indicate that 50% of the forebay capacity has been filled. Sediments excavated from ED ponds are not usually considered toxic or hazardous, and can be safely disposed by either land application or land filling.

SECTION 10: AS-BUILT REQUIREMENTS

After the pond is constructed, an as-built certification of the pond, performed by a registered Professional Engineer, must be submitted to Metro. The as-built certification verifies that the SCM was installed as designed and approved. Volume 1 Chapter 3 provides as-built certification requirements. The following are additional components which must be addressed in the as-built certification:

1. Pretreatment for coarse sediments must be provided.
2. Surrounding drainage areas must be stabilized to prevent sediment from clogging the filter media.
3. Correct ponding depths and infiltration rates must be maintained to prevent killing vegetation.
4. A mechanism for overflow for large storm events must be provided.

SECTION 11: COMMUNITY AND ENVIRONMENTAL CONCERNS

Extended Detention Ponds can generate the following community and environmental concerns that need to be addressed during design.

Aesthetics. ED ponds tend to accumulate sediment and trash, which residents are likely to perceive as unsightly and creating nuisance conditions. Fluctuating water levels in ED ponds also create a difficult landscaping environment. In general, designers should avoid designs that rely solely on *dry* ED ponds.

Existing Wetlands. ED ponds should never be constructed within existing *natural* wetlands, nor should they inundate or otherwise change the hydroperiod of existing wetlands.

Existing Forests. Designers can expect a great deal of neighborhood opposition if they do not make a concerted effort to save mature trees during design and pond construction. Designers should also be aware that even modest changes in inundation frequency can kill upstream trees (Cappiella *et al.*, 2007).

Safety Risk. ED ponds are generally considered to be safer than other pond options, since they have few deep pools. Steep side-slopes and unfenced headwalls, however, can still create some safety risks. Gentle side slopes should be provided to avoid potentially dangerous drop-offs, especially where ED ponds are located near residential areas.

Mosquito Risk. The fluctuating water levels within ED ponds have potential to create conditions that lead to mosquito breeding. Mosquitoes tend to be more prevalent in irregularly flooded ponds than in ponds with a permanent pool (Santana *et al.*, 1994). Designers can minimize the risk by combining ED with a wet pond or wetland.

Activity: Extended Detention

SECTION 12: REFERENCES

- Chesapeake Stormwater Network (CSN). 2008. *Technical Bulletin 1: Stormwater Design Guidelines for Karst Terrain in the Chesapeake Bay Watershed*. Version 1.0. Baltimore, MD. Available online at: <http://www.chesapeakestormwater.net/all-things-stormwater/stormwater-guidance-for-karst-terrain-in-the-chesapeake-bay.html>
- Cappiella, K., T. Schueler and T. Wright. 2005. *Urban Watershed Forestry Manual: Part 1: Methods for Increasing Forest Cover in a Watershed*. USDA Forest Service. Center for Watershed Protection. Ellicott City, MD.
- Cappiella, K., T. Schueler and T. Wright. 2006. *Urban Watershed Forestry Manual: Part 2: Conserving and Planting Trees at Development Sites*. USDA Forest Service. Center for Watershed Protection. Ellicott City, MD.
- Cappiella, K., T. Schueler, J. Tomlinson, T. Wright. 2007. *Urban Watershed Forestry Manual: Part 3: Urban Tree Planting Guide*. USDA Forest Service. Center for Watershed Protection. Ellicott City, MD.
- Cappiella, K., L. Fraley-McNeal, M. Novotney and T. Schueler. 2008. "The Next Generation of Stormwater Wetlands." *Wetlands and Watersheds Article No. 5*. Center for Watershed Protection. Ellicott City, MD.
- Center for Watershed Protection. 2004. *Pond and Wetland Maintenance Guidebook*. Ellicott City, MD.
- CWP. 2007. *National Pollutant Removal Performance Database, Version 3.0*. Center for Watershed Protection, Ellicott City, MD
- Chesapeake Stormwater Network (CSN). 2008. *Technical Bulletin 1: Stormwater Design Guidelines for Karst Terrain in the Chesapeake Bay Watershed*. Version 1.0. Baltimore, MD.
- Chesapeake Stormwater Network (CSN). 2009. Technical Bulletin No. 1. Stormwater Guidance for Karst Terrain in the Chesapeake Bay Watershed, Version 2.0. Retrieved from www.chesapeakestormwater.net/all-things-stormwater/category/policy-design-issues.
- Hirschman, D., L. Woodworth and S. Drescher. 2009. *Technical Report: Stormwater BMPs in Virginia's James River Basin: An Assessment of Field Conditions & Programs*. Center for Watershed Protection. Ellicott City, MD.
- Maryland Department of Environment (MDE). 2000. *Maryland Stormwater Design Manual*. Baltimore, MD. Available online at: www.mde.state.md.us/Programs/WaterPrograms/SedimentandStormwater/stormwaterdesign/index.asp.
- Santana, F.J., J.R. Wood, R.E. Parsons, & S.K. Chamberlain. 1994. Control of Mosquito Breeding in Permitted Stormwater Systems. Brooksville: Sarasota County Mosquito Control and Southwest Florida Water Management District.
- Schueler, T., D. Hirschman, M. Novotney and J. Zielinski. 2007. *Urban Stormwater Retrofit Practices*. Manual 3 in the Urban Subwatershed Restoration Manual Series. Center for Watershed Protection, Ellicott City, MD.
- Virginia Department of Conservation and Recreation (VADCR). 1999. *Virginia Stormwater Management Handbook, Volumes 1 and 2*. Division of Soil and Water Conservation. Richmond, VA.
- Virginia Department of Conservation and Recreation (VADCR). 2011. *Virginia DCR Stormwater Design Specification No. 15, Extended Detention (ED) Pond, Version 1.9, March 1, 2011*. Division of Soil and Water Conservation. Richmond, VA.

Activity: Extended Detention

This page intentionally left blank