

PLAN

NOTE:  
STANDARD FRAME AND COVER SHALL  
SHALL BE INSTALLED ON STANDARD  
MANHOLE UNLESS NOTED OTHERWISE  
ON THE CONSTRUCTION DRAWINGS.


STANDARD MANHOLE FRAME AND  
COVER (ASTM-A48 CLASS 30)

GRADE ADJUSTMENT RINGS

24" OR 36" PRECAST  
CONC. CONCENTRIC  
CONE AS DETERMINED  
BY ENGINEER

PRECAST CONC. RISER

CONC. FILLET CLASS "A"  
3500 POUNDS

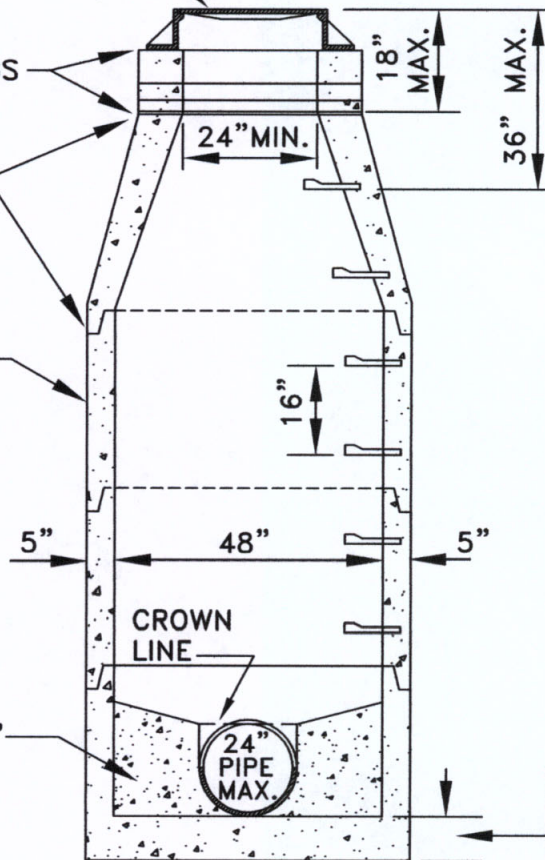

SECTION

6" FOR 48" DIA. M.H.  
8" FOR 60" & 72"  
DIA. M.H.

MONOLITHIC SIDEWALL  
TO BE 6" THICK

METRO WATER SERVICES

STD. PRECAST CONC.  
MANHOLE DETAIL

NOT TO SCALE | DATE: 05/05/08

DWG. NO. SDET003



*Hal Battie*  
LICENSED COLLECTION OPERATOR

*Smith*  
DIRECTOR OF WATER AND SEWERAGE SERVICES